



Light efficiency:


10 Lumen/Watt

Light quality:

CRI: -20.5

Color temperature:

1456 K

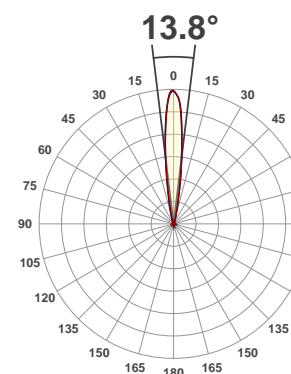

Product name:

MOD HEX100

Test:


Amber

Date:


10/11/2017

Output: 132 lm Power consumption: 13.2 W Peak: 1394 cd


Spectral distribution

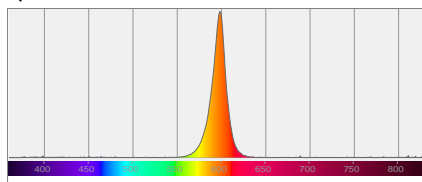


Color coordinates



Zoom color point




CRI R values

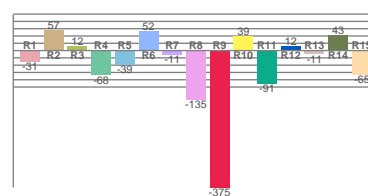

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color divition from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
1456 K	-20.5	-375.4	4.6	16.3	1.6	0.598	0.397	0.364	0.363	0.0025

Beam details

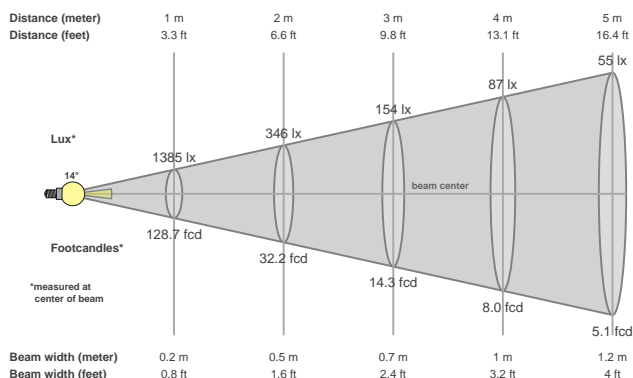

Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
13.8°	26.8°	42.7°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
1394 cd	90.6%	88.6%

Power

Power	Power factor	Power frequency
13.2 W	0.5	60 Hz

Nominal voltage	Voltage	Current
230 V	115 V	0.231 A

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1385lx	346lx	154lx	87lx	55lx	38lx	28lx	22lx	17lx	14lx	11lx	10lx	8lx	7lx	6lx	5lx	5lx	4lx	4lx	3lx
128.7fcd	32.2fcd	14.3fcd	8fcd	5.1fcd	3.6fcd	2.6fcd	2fcd	1.6fcd	1.3fcd	1.1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.4fcd	0.4fcd	0.4fcd	0.3fcd