

Focus Spot 4Z



Light Efficiency:

29 Lumen/Watt

Light Quality:

CRI: 76.3

Color Temperature:

24104 K

Output: 6994 lm

Peak: 111622 cd


Power: 241.2 W

PF: 0.99



Beam Angle

17.4°

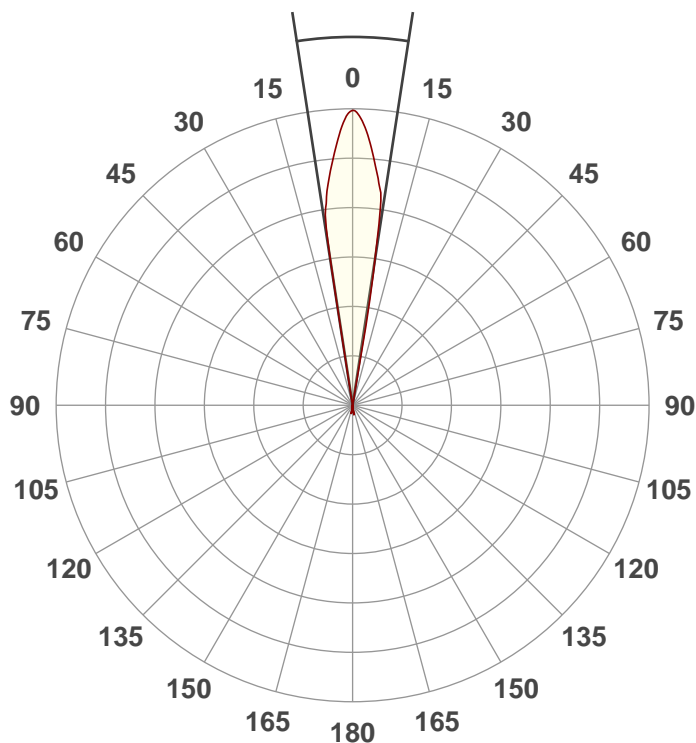


Test:

Zoom 50%

Date:

2/15/2019


Note:




CIE 1931
x: 0.259
y: 0.247

Spectra



Dominant Wavelength: 468nm

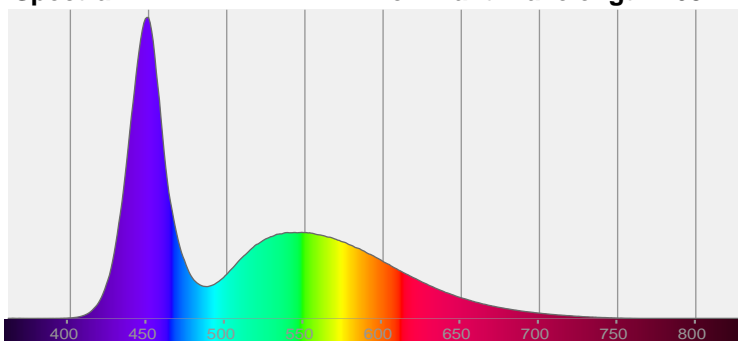


Power

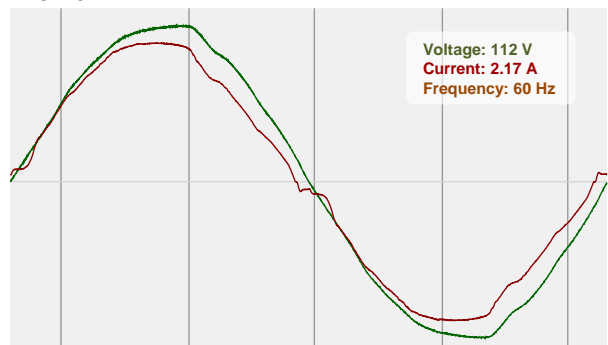

Color Details

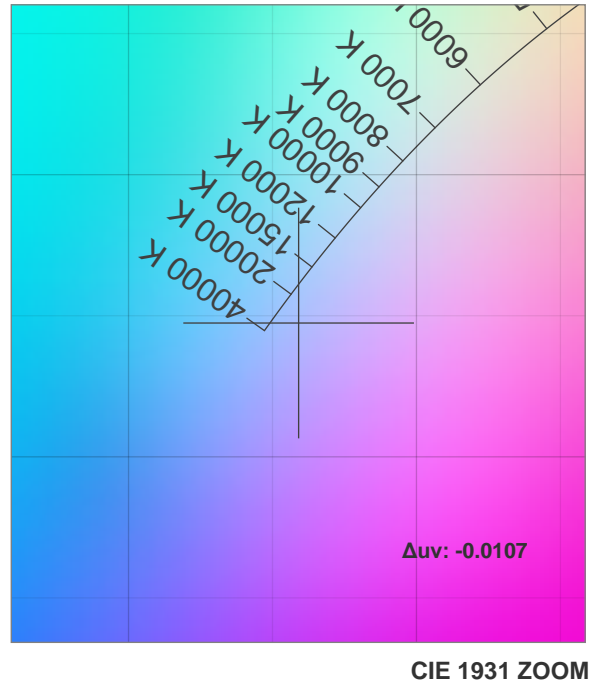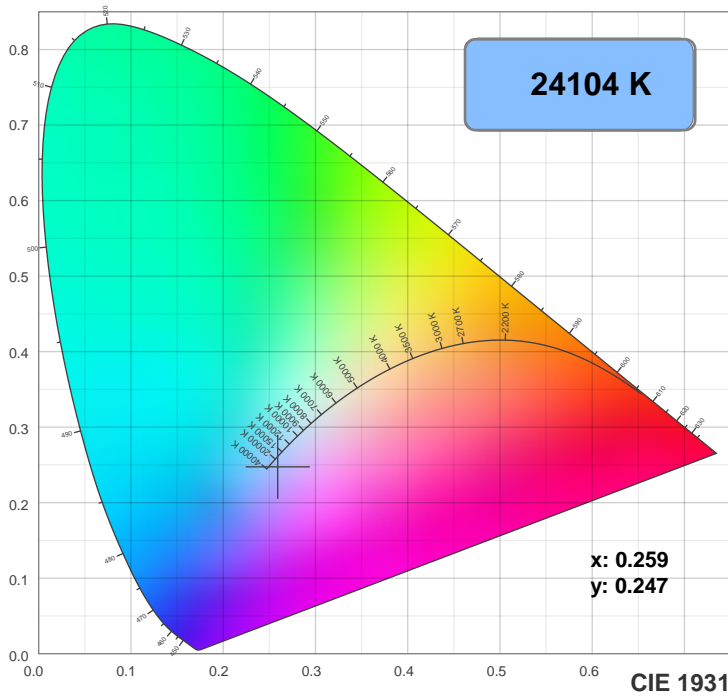

TM30: 67.4

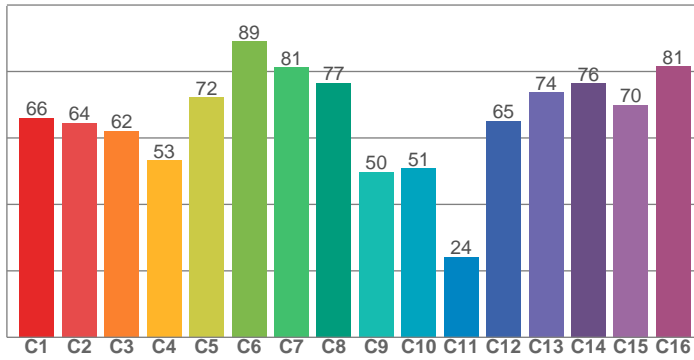

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
79.8	76.5	66.1	83.2	79.1	65.9	83.1	76.9	10.2	37.1	82.7	41.5	78.6	80.9	81.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
66.1	64.5	62.1	53.3	72.1	89.1	81.3	76.5	49.8	50.9	24.2	65.1	73.7	76.3	70.0	81.5


CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
89.8	92.4	65.0	46.9	60.3	72.3	86.3	92.7	82.3	66.9	56.2	57.8	65.3	66.7	78.4

CRI: 76.3 (R1-R8)

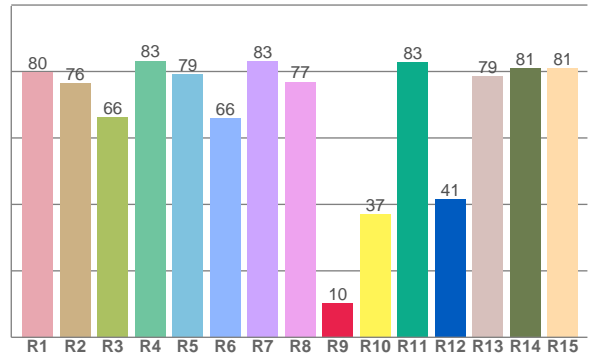


CQS: 68.7

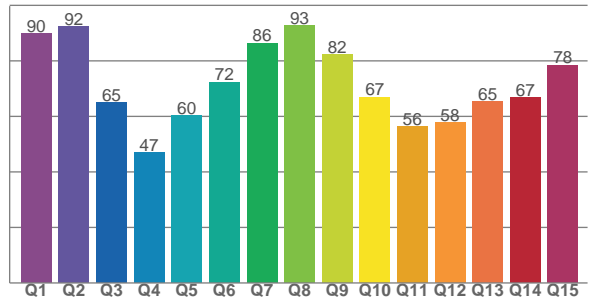

Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
24104 K	76.3	10.2	67.4	94.7	68.7	0.259	0.247	0.190	0.272	-0.0107

Beam Details

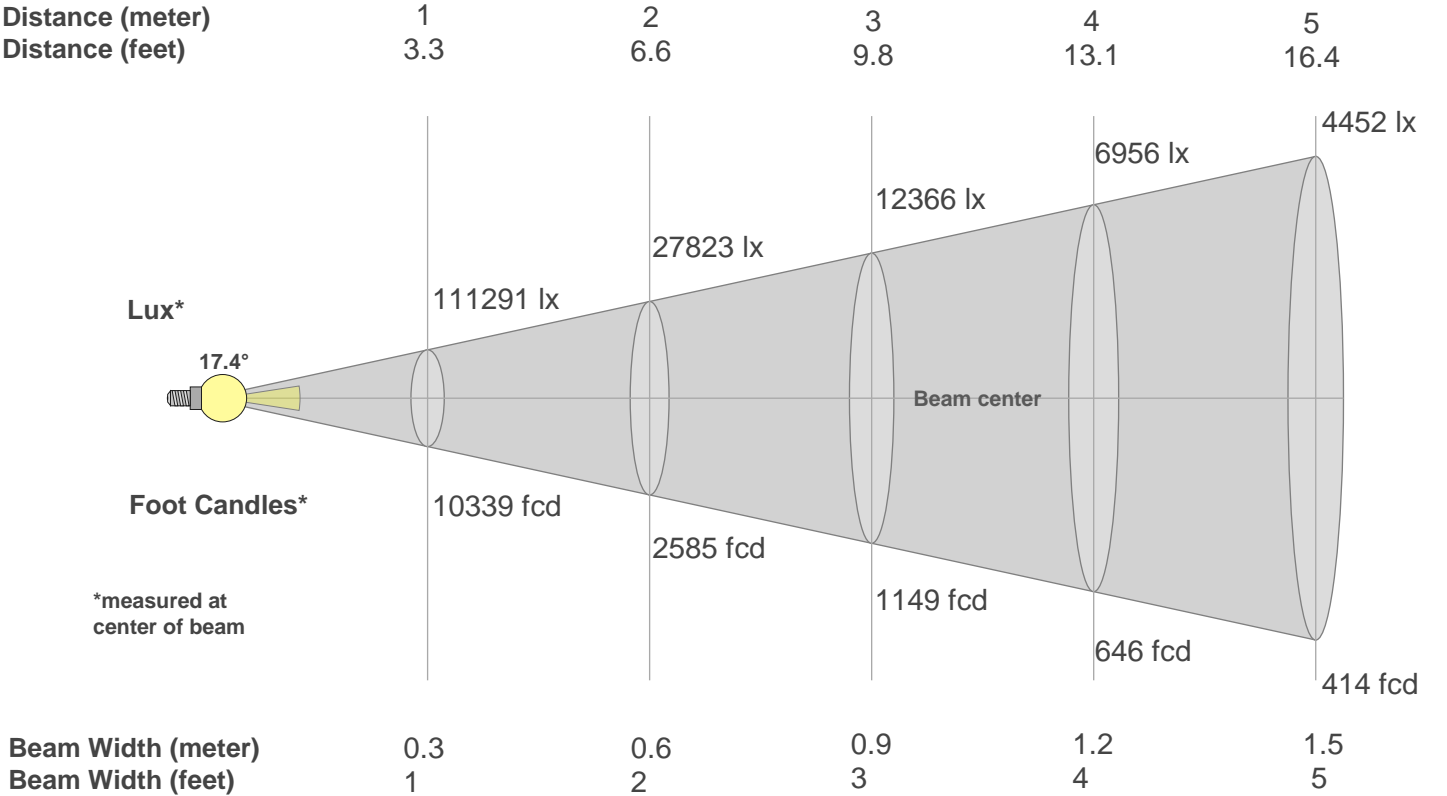

Beam Intensities from 1-20m																				
m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	111291	27823	12366	6956	4452	3091	2271	1739	1374	1113	920	773	659	568	495	435	385	343	308	278
fcd	10339.3	2584.8	1148.8	646.2	413.6	287.2	211	161.6	127.6	103.4	85.4	71.8	61.2	52.8	46	40.4	35.8	31.9	28.6	25.8

Intensities in 0° C-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
111K	110K	106K	102K	96K	91K	86K	80K	70K	42K	1K	0K	0K	0K	0K	0K	0K	0K	0K	0K
100%	99%	96%	91%	87%	82%	77%	72%	63%	38%	1%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 90° C-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
111K	110K	106K	102K	96K	91K	86K	80K	70K	42K	1K	0K	0K	0K	0K	0K	0K	0K	0K	0K
100%	99%	96%	91%	87%	82%	77%	72%	63%	38%	1%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 180° C-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
111K	110K	107K	103K	99K	93K	88K	83K	76K	48K	17K	0K	0K	0K	0K	0K	0K	0K	0K	0K
100%	99%	96%	93%	89%	84%	79%	74%	68%	43%	16%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 270° C-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
111K	110K	107K	103K	99K	93K	88K	83K	76K	48K	17K	0K	0K	0K	0K	0K	0K	0K	0K	0K
100%	99%	96%	93%	89%	84%	79%	74%	68%	43%	16%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
17.4°	19.8°	20.3°	100.0%	100.0%