

Par Z Move RGBW



Light Efficiency:



Light Quality:



Color Temperature:



Output: 3709 lm

Peak: 99434 cd


Power: 230.1 W

PF: 0.98



Beam Angle

11.8°

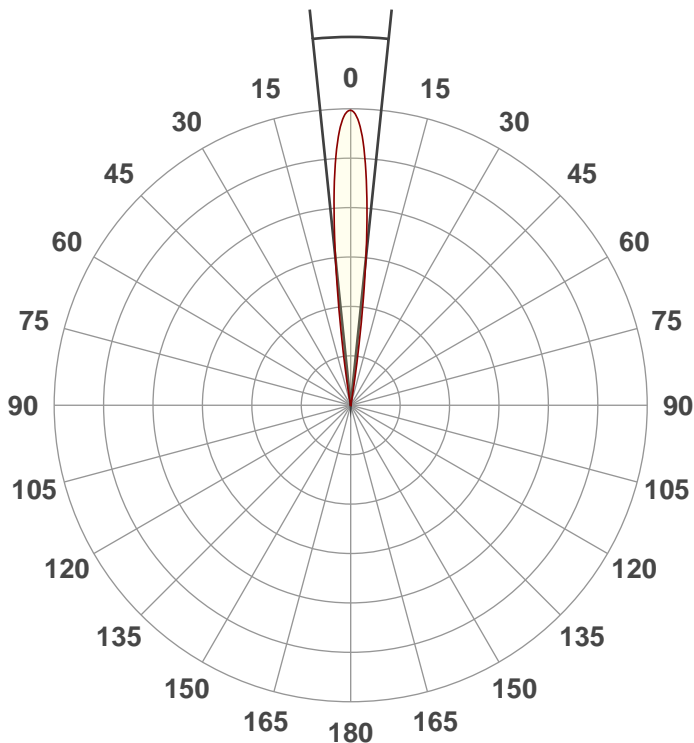


Test:

Zoom In Full On

Date:

8/28/2019


Note:




CIE 1931
x: 0.251
y: 0.216

Spectra

Dominant Wavelength: 458nm


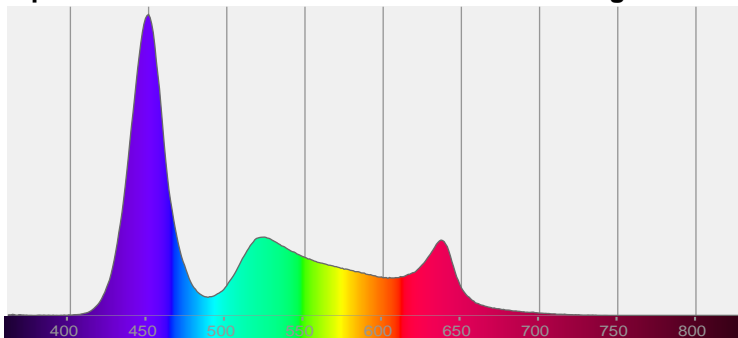


Power

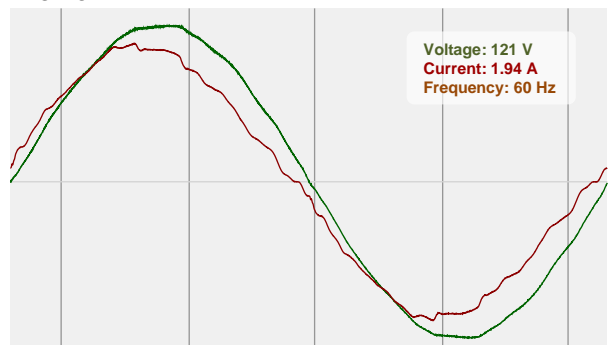

Voltage: 121 V
Current: 1.94 A
Frequency: 60 Hz

Color Details

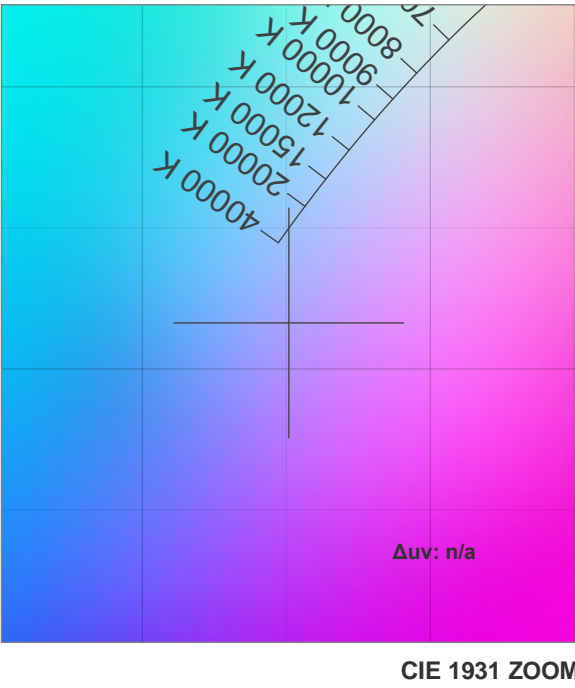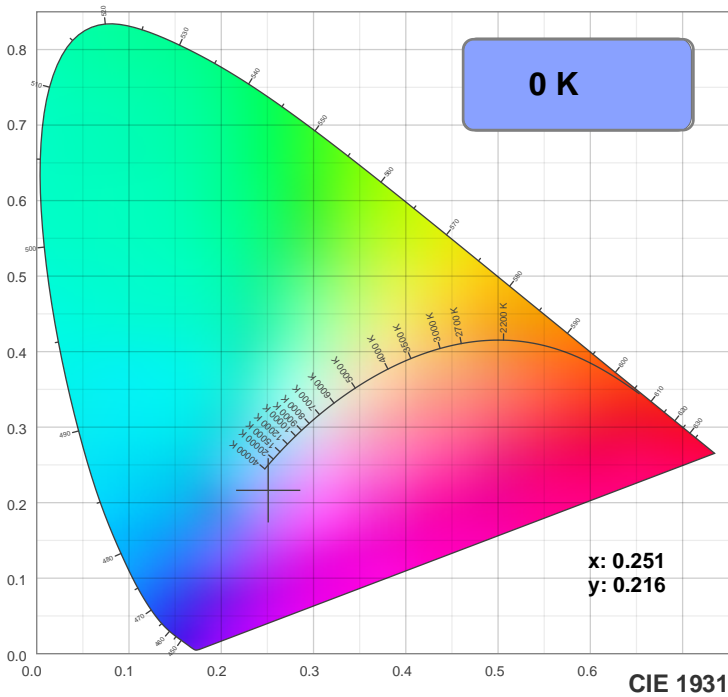

TM30: 0.0



CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CRI: 0.0 (R1-R8)

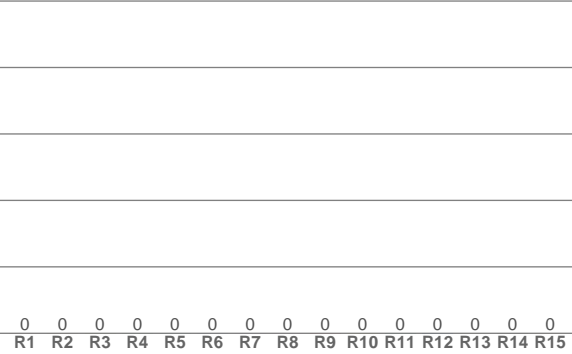


CQS: 0.0

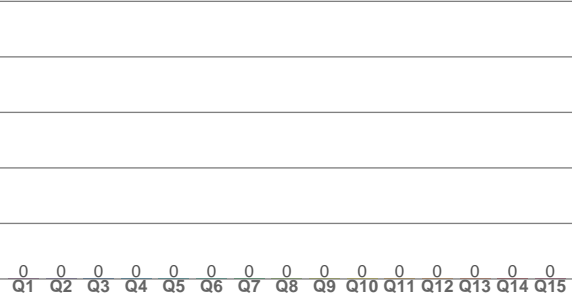

Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Diviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.251	0.216	0.197	0.255	n/a

Beam Details

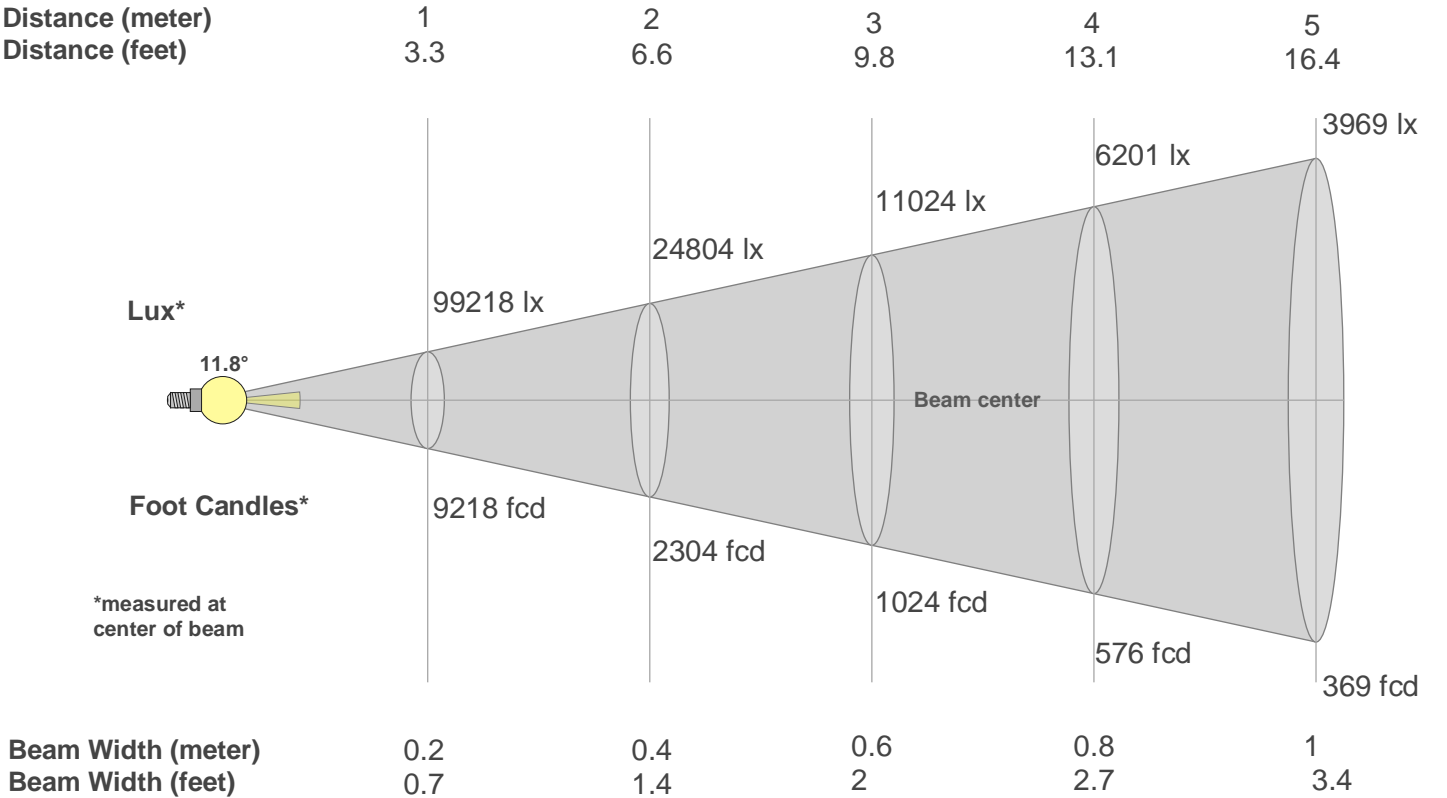

Beam Intensities from 1-20m																				
m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	99218	24804	11024	6201	3969	2756	2025	1550	1225	992	820	689	587	506	441	388	343	306	275	248
fcd	9217.7	2304.4	1024.2	576.1	368.7	256	188.1	144	113.8	92.2	76.2	64	54.5	47	41	36	31.9	28.4	25.5	23

Intensities in 0° C-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
99.2K	98.2K	94.3K	87.4K	77.3K	63.9K	48.3K	32.3K	18.4K	8.5K	2.8K	0.5K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K
100%	99%	95%	88%	78%	64%	49%	33%	19%	9%	3%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 90° C-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
99.2K	98.2K	94.3K	87.4K	77.3K	63.9K	48.3K	32.3K	18.4K	8.5K	2.8K	0.5K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K
100%	99%	95%	88%	78%	64%	49%	33%	19%	9%	3%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 180° C-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
99.2K	97.7K	93.4K	86.0K	75.6K	62.9K	48.4K	32.9K	18.5K	8.0K	2.2K	0.1K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K
100%	98%	94%	87%	76%	63%	49%	33%	19%	8%	2%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 270° C-plane																				
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	
99.2K	97.7K	93.4K	86.0K	75.6K	62.9K	48.4K	32.9K	18.5K	8.0K	2.2K	0.1K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	
100%	98%	94%	87%	76%	63%	49%	33%	19%	8%	2%	0%	0%	0%	0%	0%	0%	0%	0%	0%	

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
11.8°	17.6°	20°	100.0%	100.0%