

Focus Profile



Light Efficiency:



Light Quality:



Color Temperature:



Output: 8607 lm

Peak: 1121295 cd


Power: 586 W

PF: 1.0



Beam Angle

5.8°

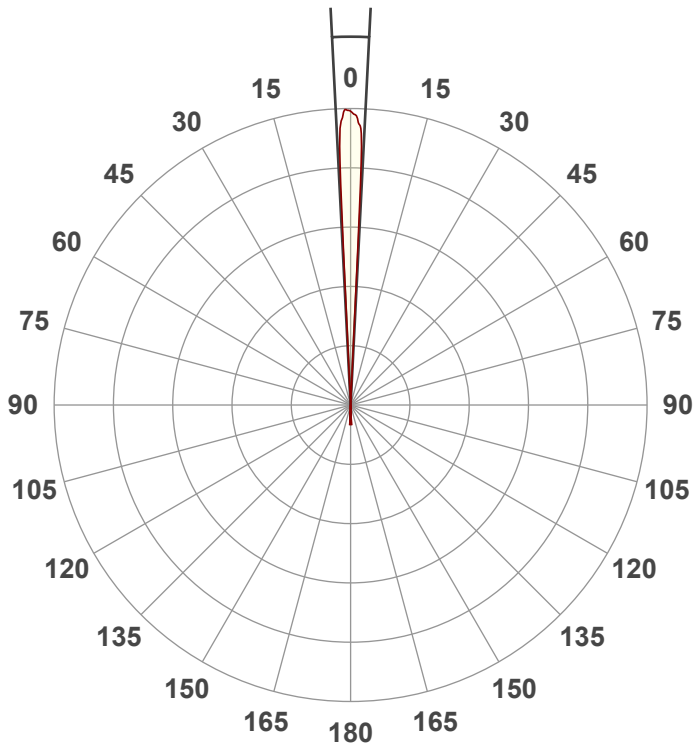

Test:


Zoom In CTB

Date:

9/8/2021

Note:


PT# 0077



CIE 1931
x: 0.304
y: 0.312

Spectra



Dominant Wavelength: 450nm

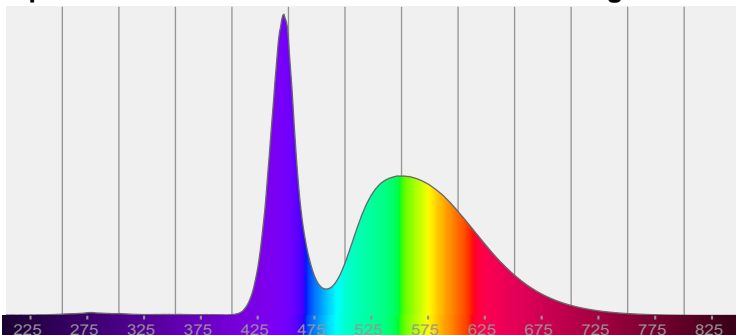


Power

Voltage: 114 V
Current: 5.14 A
Frequency: 0 Hz


Color Details

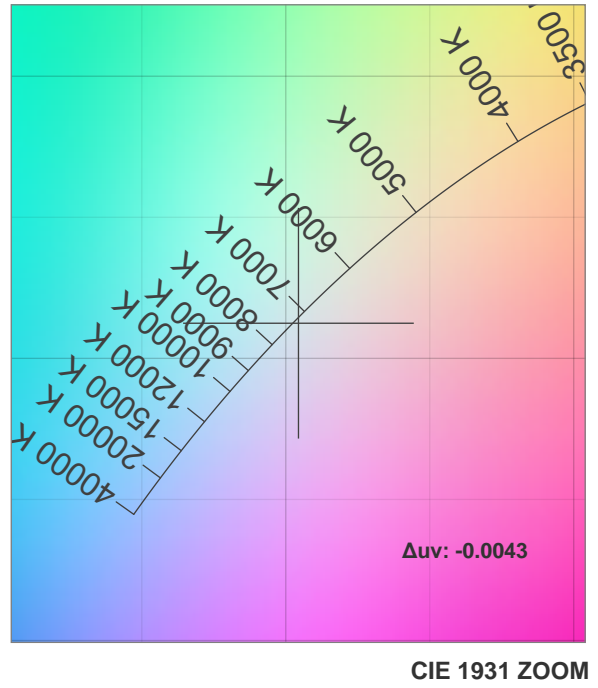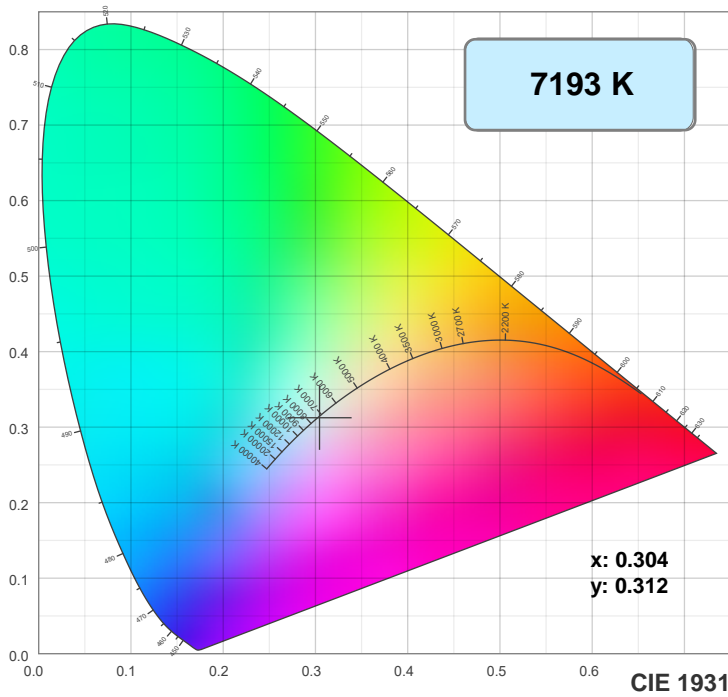

TM30: 69.7

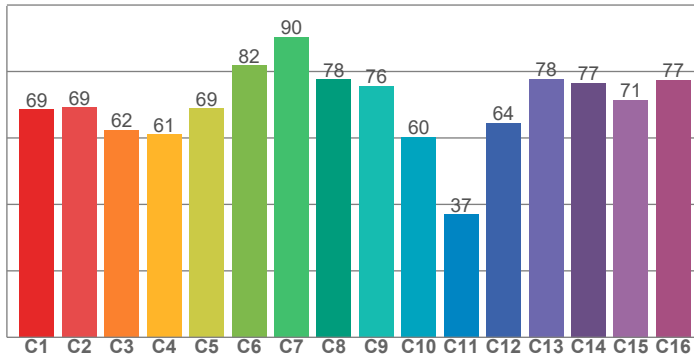

CRI: 70.8 (R1-R8)

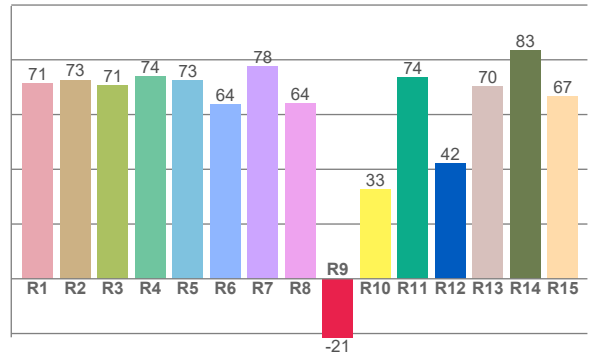

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
71.5	72.7	70.8	73.9	72.6	63.6	77.5	64.1	-21.4	32.8	73.5	42.2	70.3	83.3	66.8


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
68.6	69.2	62.4	61.1	68.9	81.9	90.4	77.7	75.6	60.3	37.0	64.5	77.7	76.6	71.5	77.5

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
82.1	89.7	58.7	52.5	66.9	72.8	77.6	88.0	84.5	66.0	59.9	62.7	67.7	58.9	69.2


CQS: 68.4

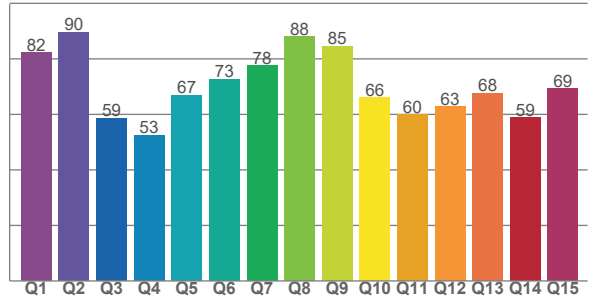

Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
7193 K	70.8	-21.4	69.7	95.5	68.4	0.304	0.312	0.198	0.305	-0.0043

Beam Details

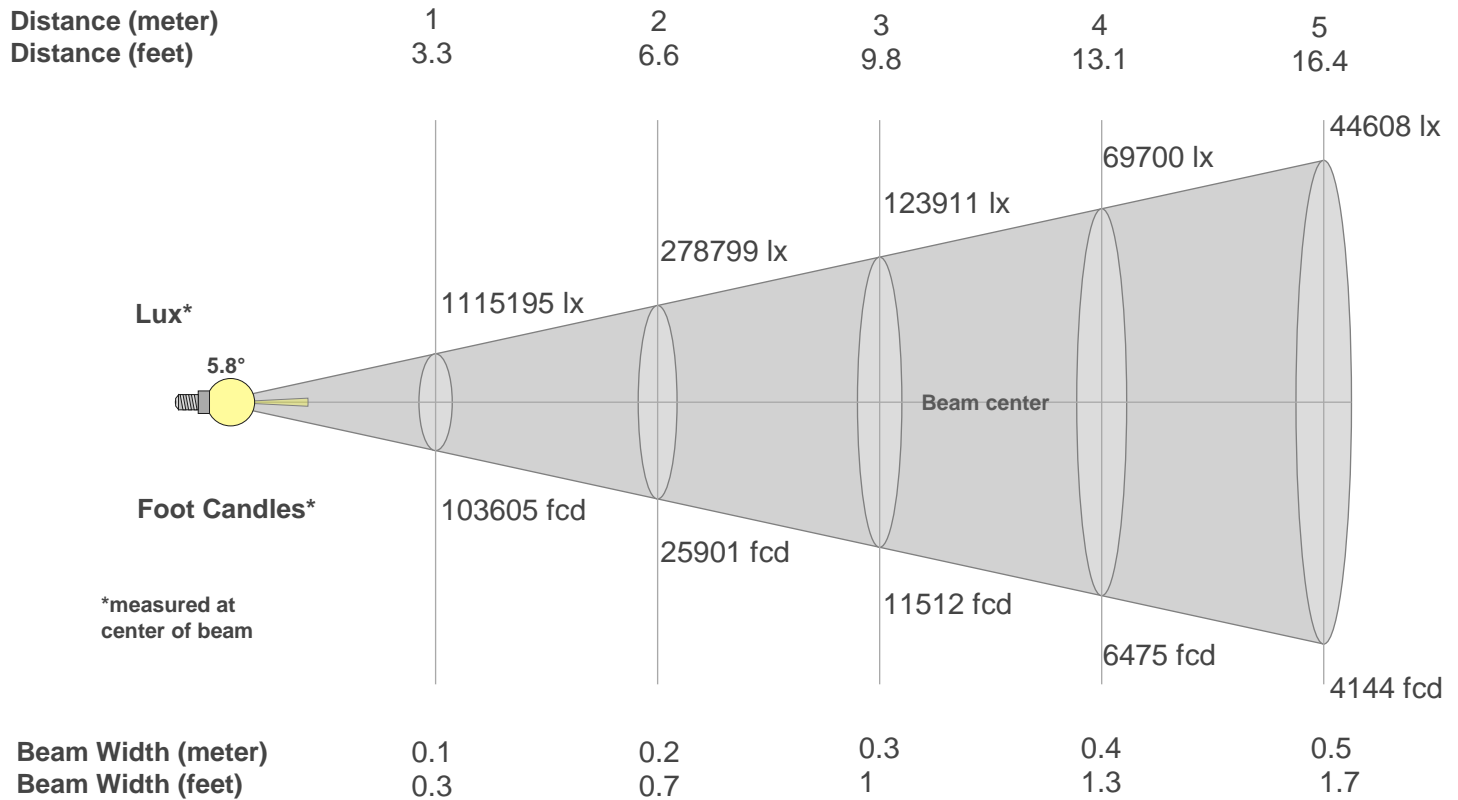

Beam Intensities from 1-20m

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	11151 95	278799	123911	69700	44608	30978	22759	17425	13768	11152	9216	7744	6599	5690	4956	4356	3859	3442	3089	2788
fcd	10360 5	25901.3	11511.7	6475.3	4144.2	2877.9	2114.4	1618.8	1279.1	1036.1	856.2	719.5	613	528.6	460.5	404.7	358.5	319.8	287	259

Intensities in 0° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
1.1M	1.1M	1.0M	0.5M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	100%	91%	41%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 90° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
1.1M	1.1M	1.0M	0.5M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	100%	91%	41%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 180° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
1.1M	1.1M	1.0M	0.5M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	98%	90%	41%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 270° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
1.1M	1.1M	1.0M	0.5M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	98%	90%	41%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
5.8°	6.8°	6.9°	100.0%	100.0%