

# Focus Flex L7




Light Efficiency:



Light Quality:



Color Temperature:




Output: 1946 lm  
Peak: 22105 cd  
Power: 175.4 W  
PF: 0.98



Beam Angle

18.9°

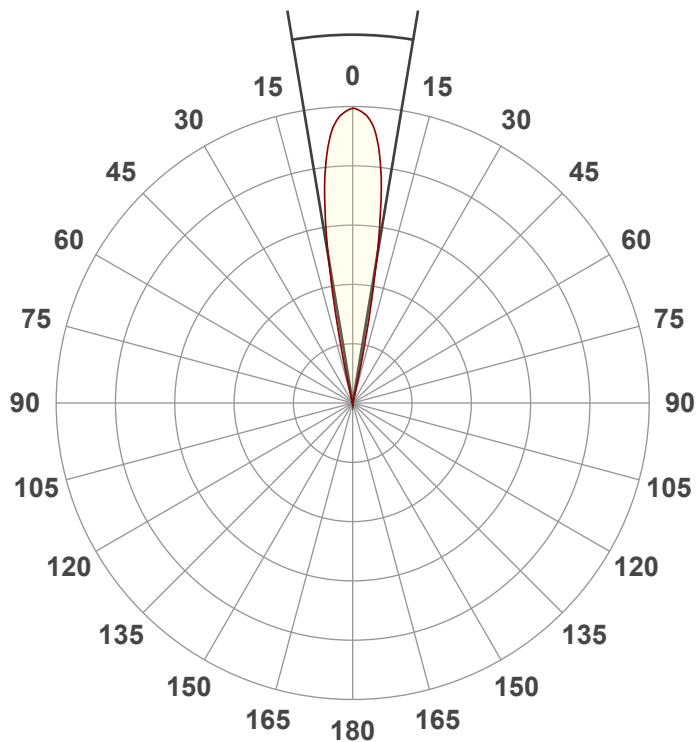


Test:  
2700K Zoom 50%  
Date:  
10/14/2022  
Note:  
CCT @ 61




CIE 1931  
x: 0.449  
y: 0.414

Spectra



Dominant Wavelength: 583nm

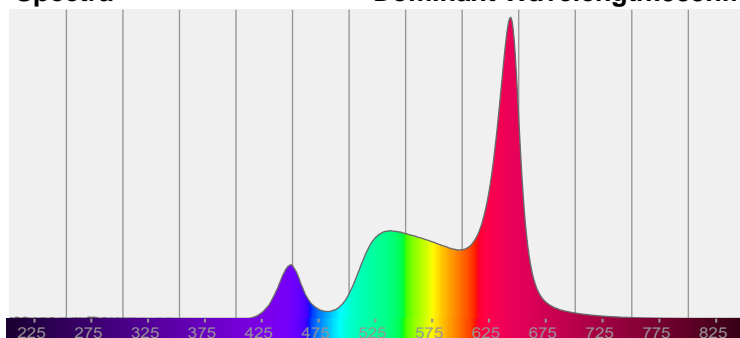


Power

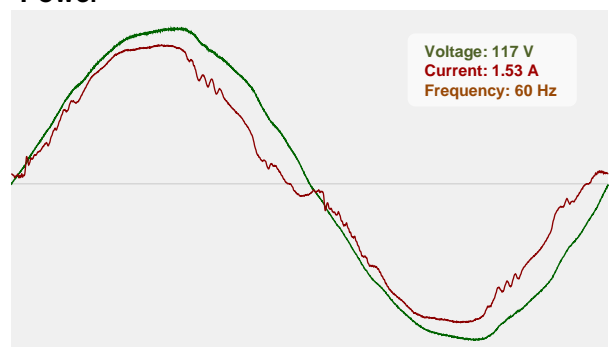


## Color Details

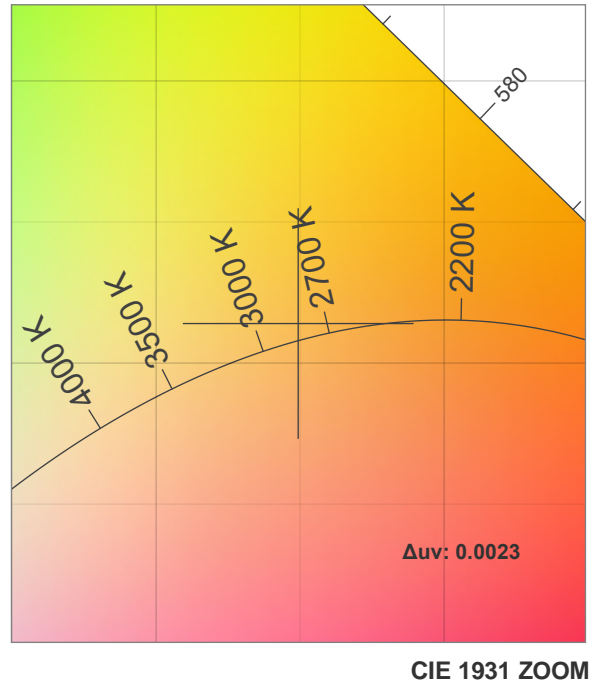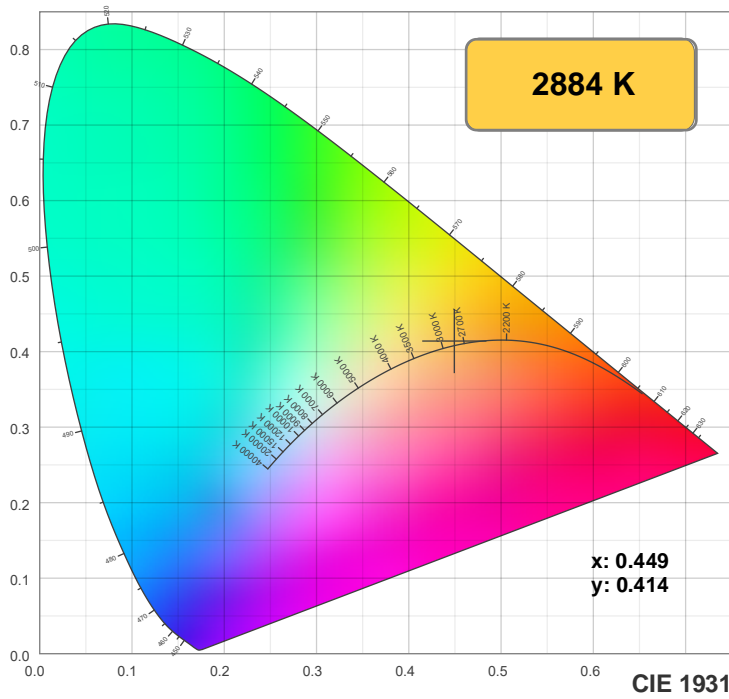

TM30: 84.6

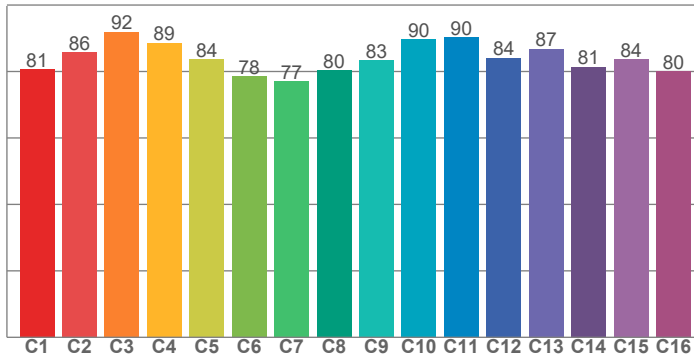

CRI: 79.6 (R1-R8)

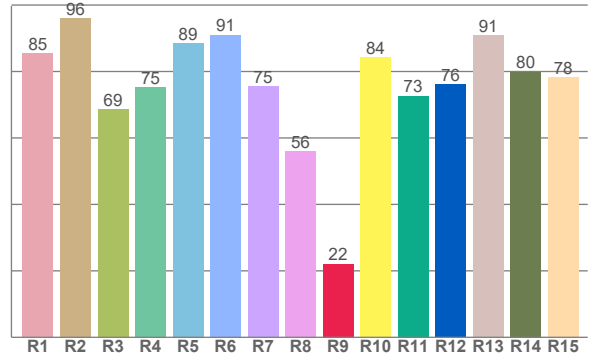

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
85.4	95.9	68.6	75.3	88.6	91.1	75.5	56.1	22.1	84.4	72.7	76.0	90.9	79.9	78.2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
80.7	85.8	91.9	88.6	83.6	78.4	77.1	80.3	83.3	89.7	90.2	84.0	86.9	81.4	83.6	80.1

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93.1	94.8	86.3	90.0	81.4	73.0	83.0	94.1	84.8	92.0	90.6	85.4	81.7	90.3	93.2


CQS: 86.1

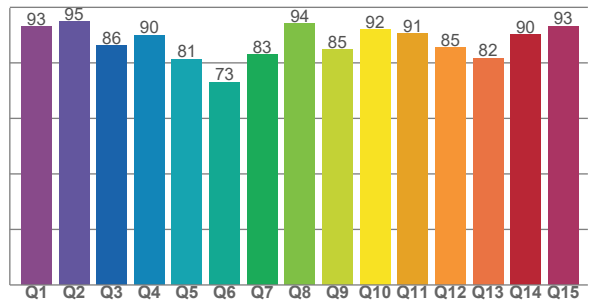

## Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
2884 K	79.6	22.1	84.6	112.7	86.1	0.449	0.414	0.254	0.351	0.0023

## Beam Details

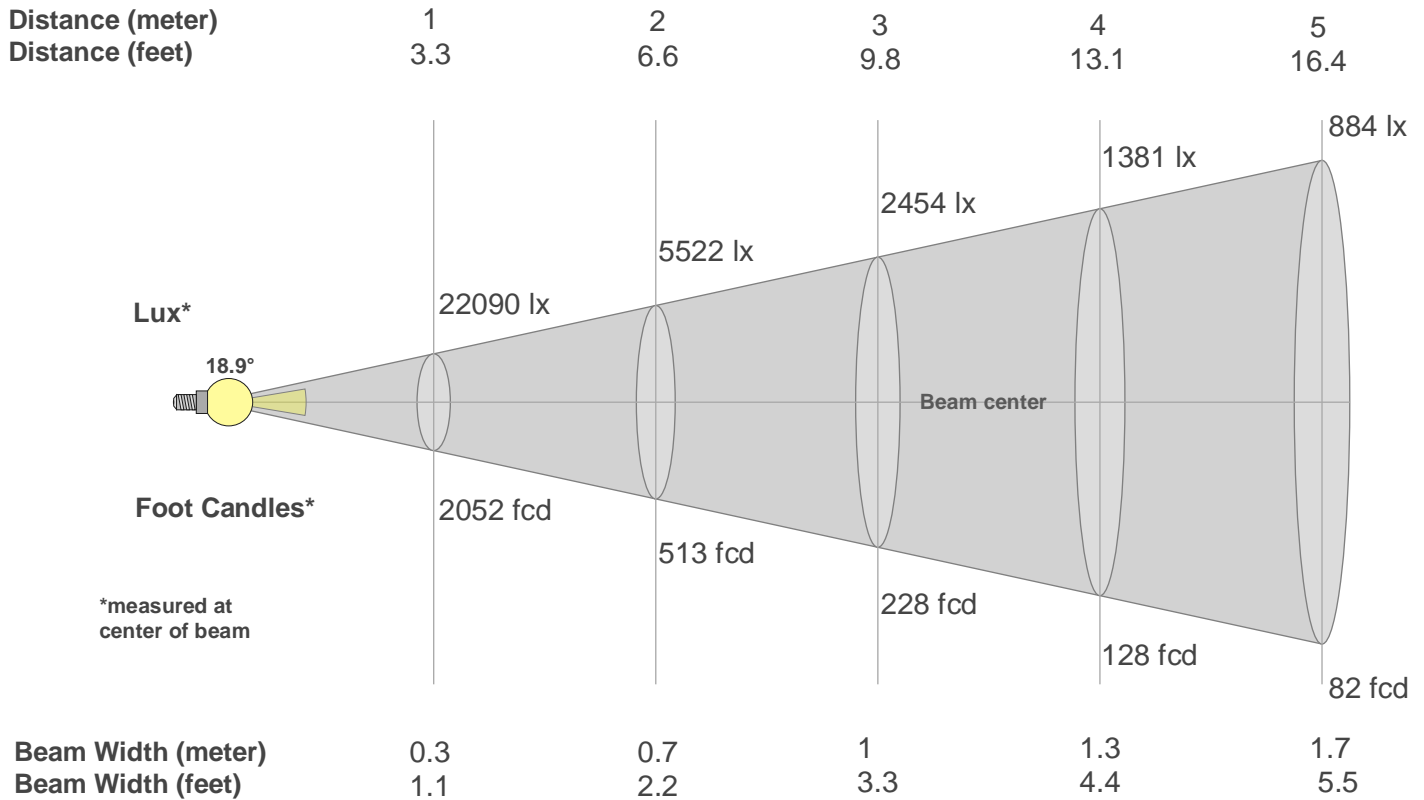

Beam Intensities from 1-20m

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	22090	5522	2454	1381	884	614	451	345	273	221	183	153	131	113	98	86	76	68	61	55
fcd	2052.2	513	228	128.3	82.1	57	41.9	32.1	25.3	20.5	17	14.3	12.1	10.5	9.1	8	7.1	6.3	5.7	5.1

Intensities in 0° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
22.1K	21.9K	21.7K	21.3K	20.7K	19.8K	18.6K	17.0K	14.9K	12.4K	9.4K	6.5K	3.8K	1.9K	0.8K	0.1K	0.0K	0.0K	0.0K	0.0K
100%	99%	98%	97%	94%	90%	84%	77%	68%	56%	42%	29%	17%	9%	3%	1%	0%	0%	0%	0%

Intensities in 90° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
22.1K	21.9K	21.7K	21.3K	20.7K	19.8K	18.6K	17.0K	14.9K	12.4K	9.4K	6.5K	3.8K	1.9K	0.8K	0.1K	0.0K	0.0K	0.0K	0.0K
100%	99%	98%	97%	94%	90%	84%	77%	68%	56%	42%	29%	17%	9%	3%	1%	0%	0%	0%	0%

Intensities in 180° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
22.1K	22.0K	21.8K	21.5K	20.9K	20.1K	19.0K	17.3K	15.1K	12.4K	9.3K	6.3K	3.5K	1.7K	0.6K	0.1K	0.0K	0.0K	0.0K	0.0K
100%	100%	99%	97%	95%	91%	86%	78%	69%	56%	42%	28%	16%	8%	3%	0%	0%	0%	0%	0%

Intensities in 270° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
22.1K	22.0K	21.8K	21.5K	20.9K	20.1K	19.0K	17.3K	15.1K	12.4K	9.3K	6.3K	3.5K	1.7K	0.6K	0.1K	0.0K	0.0K	0.0K	0.0K
100%	100%	99%	97%	95%	91%	86%	78%	69%	56%	42%	28%	16%	8%	3%	0%	0%	0%	0%	0%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
18.9°	25.5°	28.3°	100.0%	100.0%