

Light efficiency:

39 Lumen/Watt

Light quality:

CRI: 96.1

Color temperature:

3186 K

Output: 2313 lm

Peak: 21680 cd

Power: 58.7 W

PF: 0.98



Tracking number: [n/a](#)

Product name:

ElectraPix Bar 16

Item number:


3200K No Diffusion

Date and time:

8/29/2024 4:36:20 PM

Description:

@ 30

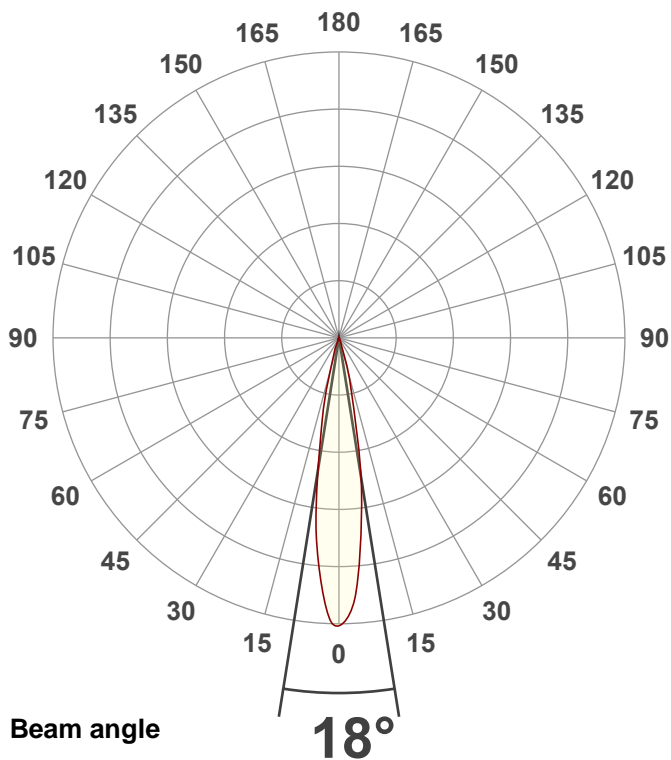


CIE 1931


x: 0.425

y: 0.401



Spectra

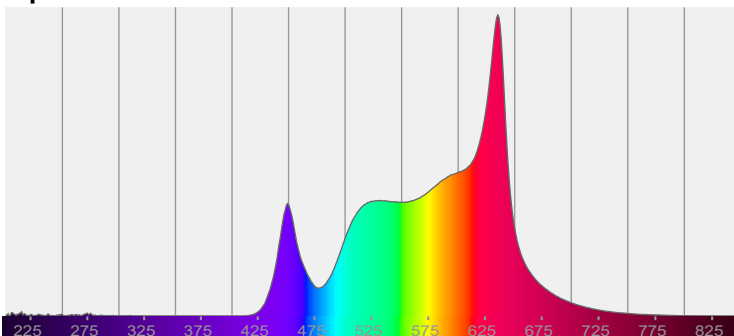


Power

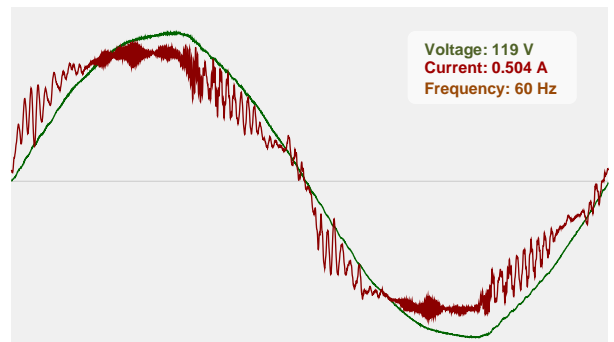


Color details

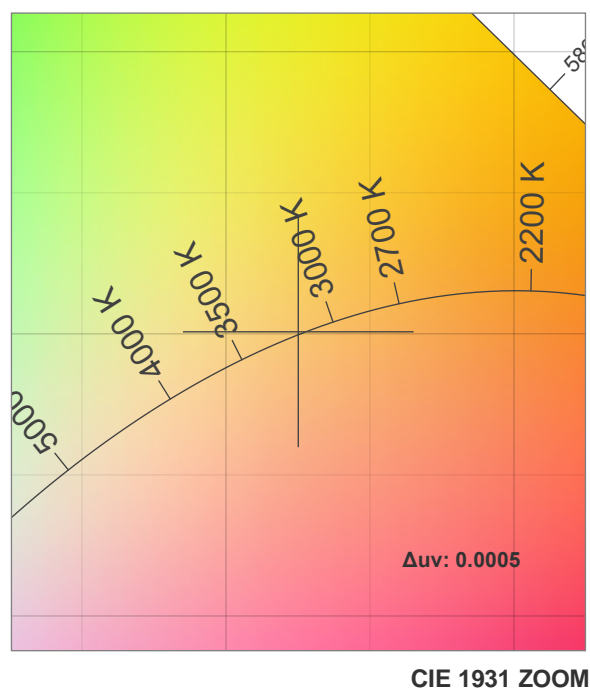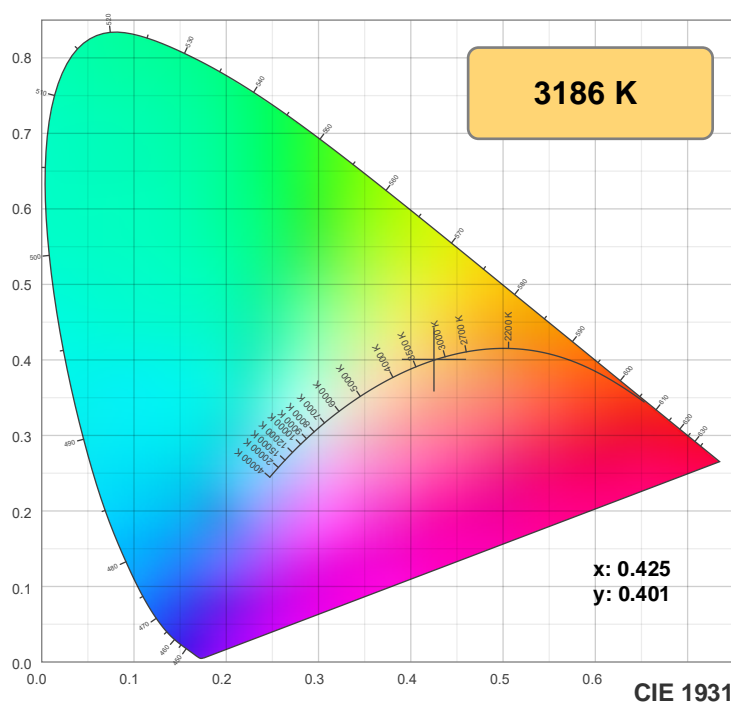

TM-30: 93.4

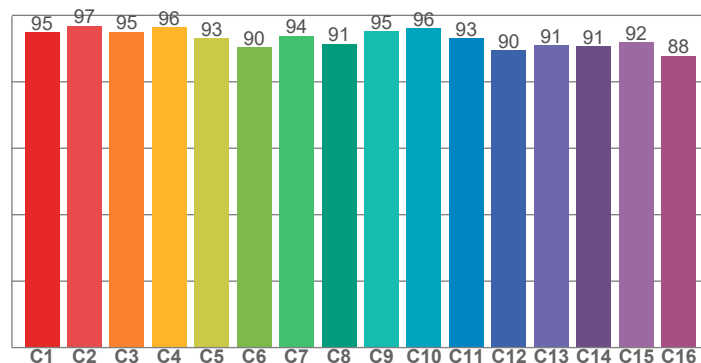

CRI: 96.1 (R1-R8)

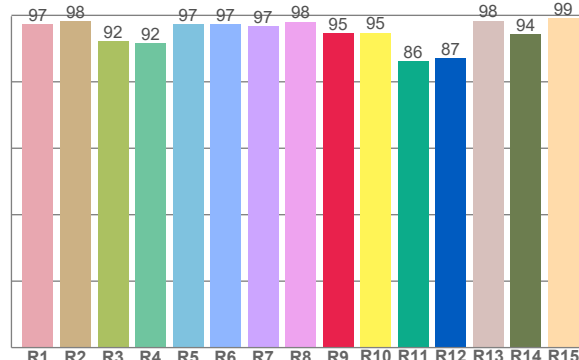

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97.3	98.3	92.2	91.5	97.3	97.4	96.7	98.1	94.7	94.8	86.3	87.2	98.4	94.3	99.1


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
95.0	96.9	95.0	96.3	93.0	90.5	93.9	91.5	95.1	96.0	93.2	89.5	91.0	90.7	91.8	87.9

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
94.3	96.0	91.7	97.3	92.4	88.2	92.6	98.1	96.5	96.3	96.6	96.0	96.2	97.2	96.1

CQS: 94.2

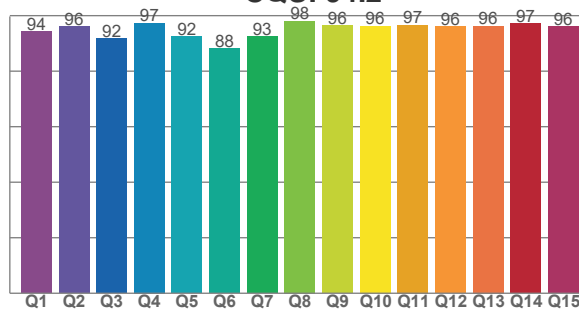

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3186 K	96.1	94.7	93.4	104.2	94.2	0.425	0.401	0.244	0.346	0.0005

TM-30 details







Rf 93.4

Fidelity index Rf


Rg 104.2

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	95	-1%	-2%
2	97	0%	0%
3	95	0%	2%
4	96	0%	2%
5	93	1%	3%
6	90	6%	3%
7	94	4%	-1%
8	91	5%	-2%
9	95	1%	-2%
10	96	-1%	0%
11	93	1%	4%
12	90	5%	-2%
13	91	4%	-5%
14	91	5%	-5%
15	92	2%	-4%
16	88	2%	-9%

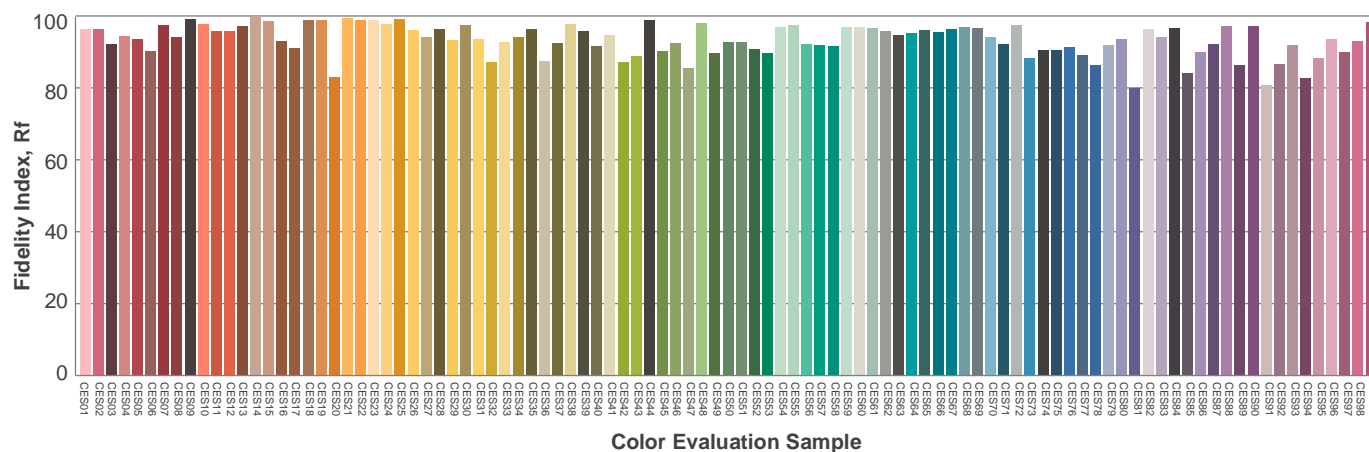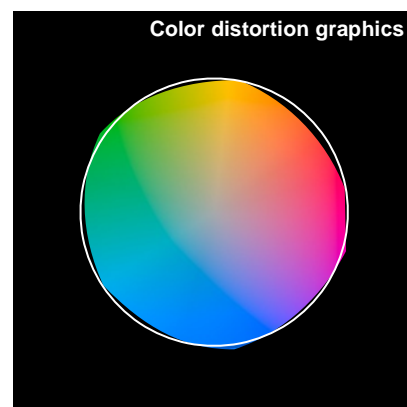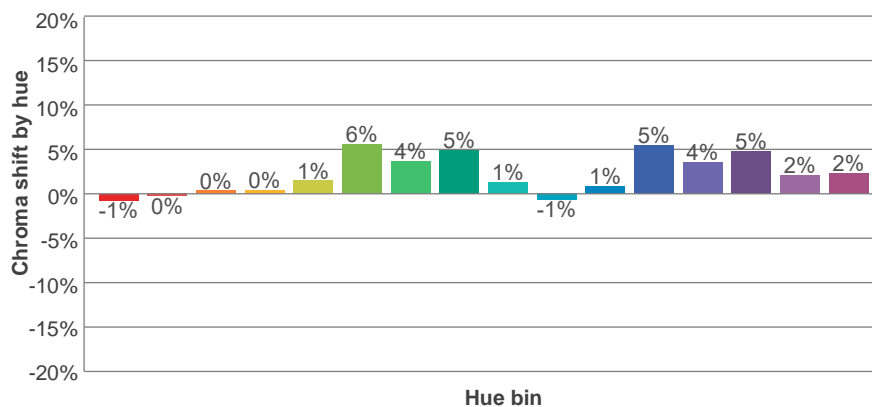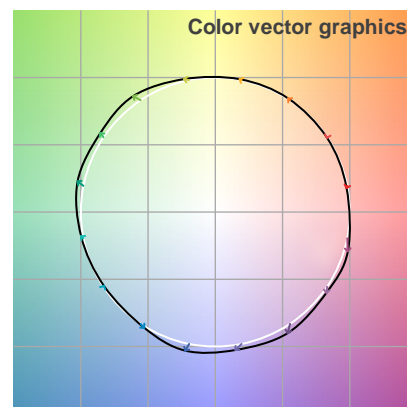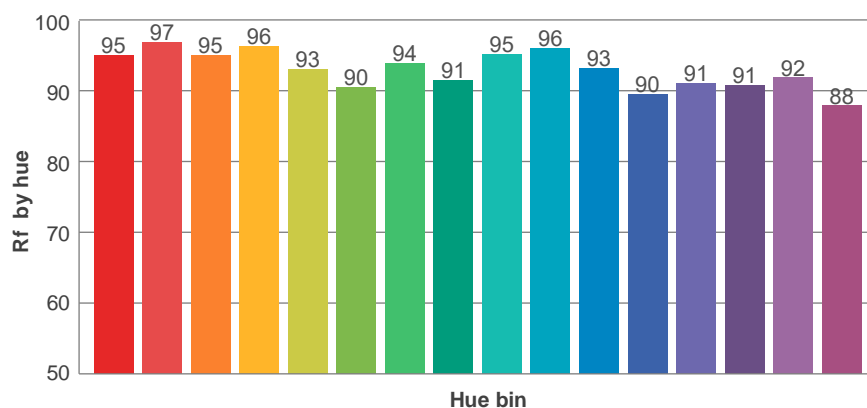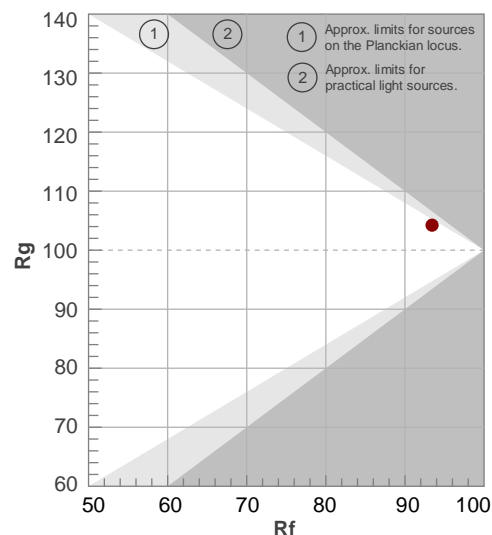

Beam details

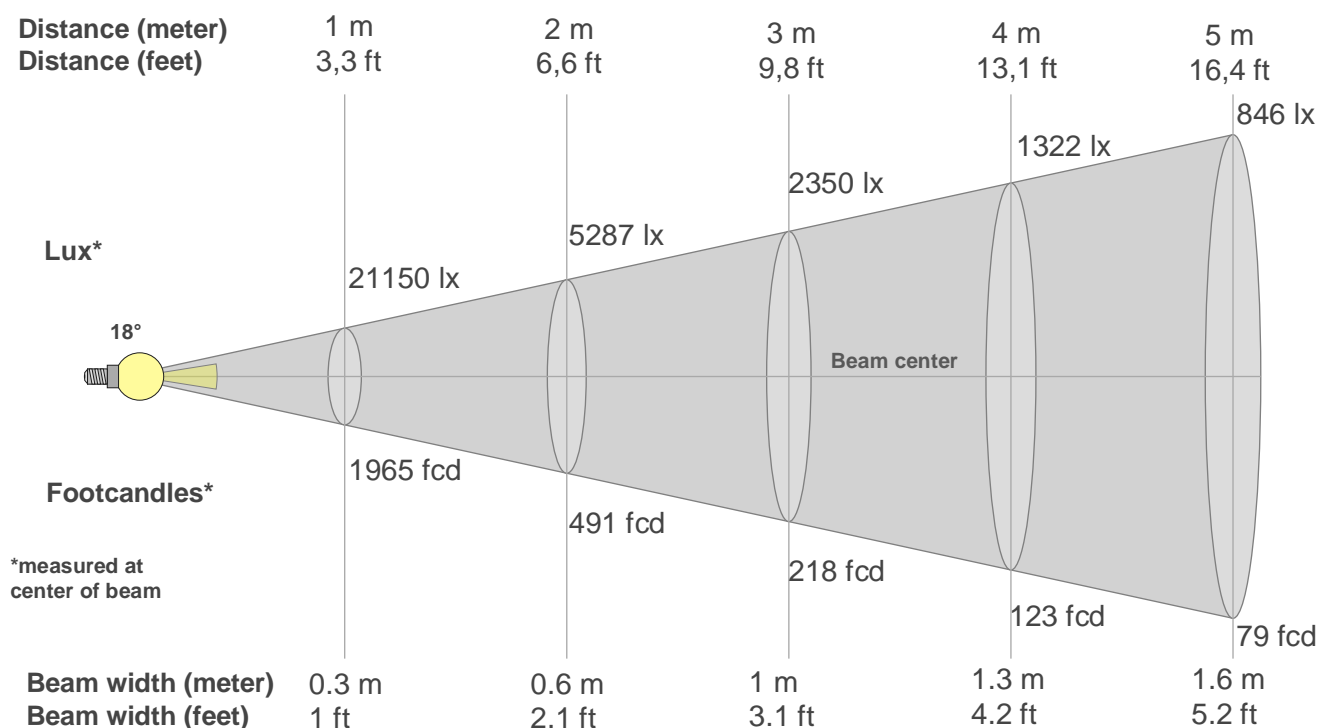

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
21150lx	5287lx	2350lx	1322lx	846lx	587lx	432lx	330lx	261lx	211lx	175lx	147lx	125lx	108lx	94lx	83lx	73lx	65lx	59lx	53lx
1964.9fcd	491.2fcd	218.3fcd	122.8fcd	78.6fcd	54.6fcd	40.1fcd	30.7fcd	24.3fcd	19.6fcd	16.2fcd	13.6fcd	11.6fcd	10fcd	8.7fcd	7.7fcd	6.8fcd	6.1fcd	5.4fcd	4.9fcd

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
21.1K	20.8K	20.5K	20.1K	19.0K	17.4K	15.8K	14.1K	12.5K	10.9K	9.3K	7.7K	6.1K	4.6K	3.5K	2.9K	2.2K	1.6K	0.9K	0.6K
100%	98%	97%	95%	90%	82%	74%	67%	59%	51%	44%	36%	29%	22%	17%	14%	11%	7%	4%	3%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
21.1K	20.8K	20.5K	20.1K	19.0K	17.4K	15.8K	14.1K	12.5K	10.9K	9.3K	7.7K	6.1K	4.6K	3.5K	2.9K	2.2K	1.6K	0.9K	0.6K
100%	98%	97%	95%	90%	82%	74%	67%	59%	51%	44%	36%	29%	22%	17%	14%	11%	7%	4%	3%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
21.1K	21.5K	21.1K	19.8K	18.5K	17.2K	15.9K	14.4K	12.6K	10.9K	9.1K	7.3K	5.9K	5.0K	4.0K	3.0K	2.1K	1.4K	1.1K	0.9K
100%	102%	100%	94%	87%	81%	75%	68%	60%	51%	43%	35%	28%	23%	19%	14%	10%	7%	5%	4%

Intensities in 270° c-plane


0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
21.1K	21.5K	21.1K	19.8K	18.5K	17.2K	15.9K	14.4K	12.6K	10.9K	9.1K	7.3K	5.9K	5.0K	4.0K	3.0K	2.1K	1.4K	1.1K	0.9K
100%	102%	100%	94%	87%	81%	75%	68%	60%	51%	43%	35%	28%	23%	19%	14%	10%	7%	5%	4%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
18°	32°	39.9°	100.0%	99.7%


Flicker

Flicker curve (complete sampled flicker signal)

Flicker frame (frame of one flicker period)

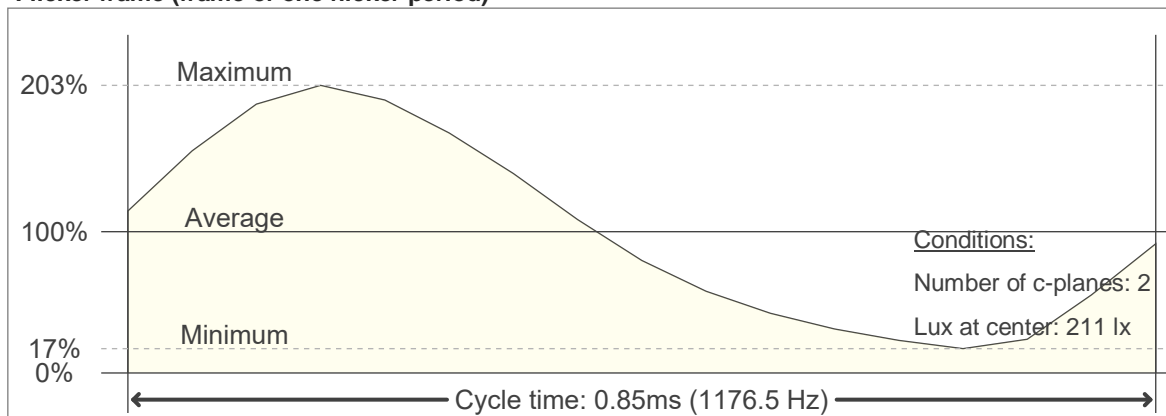

Flicker FFT (frequency scope of flicker curve)

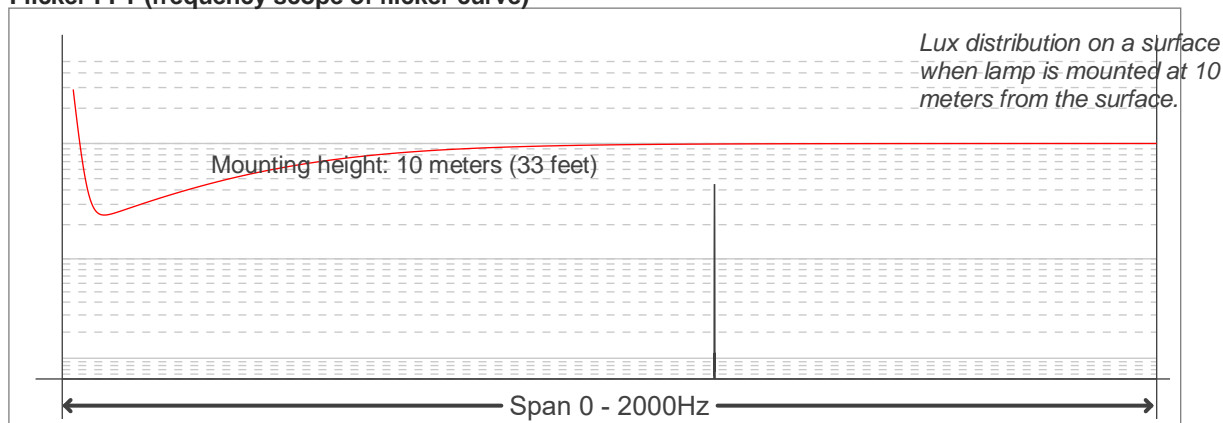

Flicker results:

Flicker frequency:		1176.47 Hz	
Flicker index:	0.28	JA8/10 40Hz	0.27 %
Flicker percentage:	86.31 %	JA8/10 90Hz	0.61 %
SVM: (Visual flicker)	0.9	JA8/10 200Hz	1.38 %
PstLM	0.04	JA8/10 400Hz	3.01 %
Mp	0.06	JA8/10 1000Hz	15.56 %

Flicker conditions:

Sample rate:	20000 samples/second
--------------	----------------------