


Light efficiency:



Light quality:



Color temperature:




Output: 7322 lm
Peak: 29124 cd
Power: 459 W
PF: 1.0




Product name:
Hydro Flex L19 (Zoom 50% Red)
Item number:

Date and time:
9/6/2025 9:12:14 AM

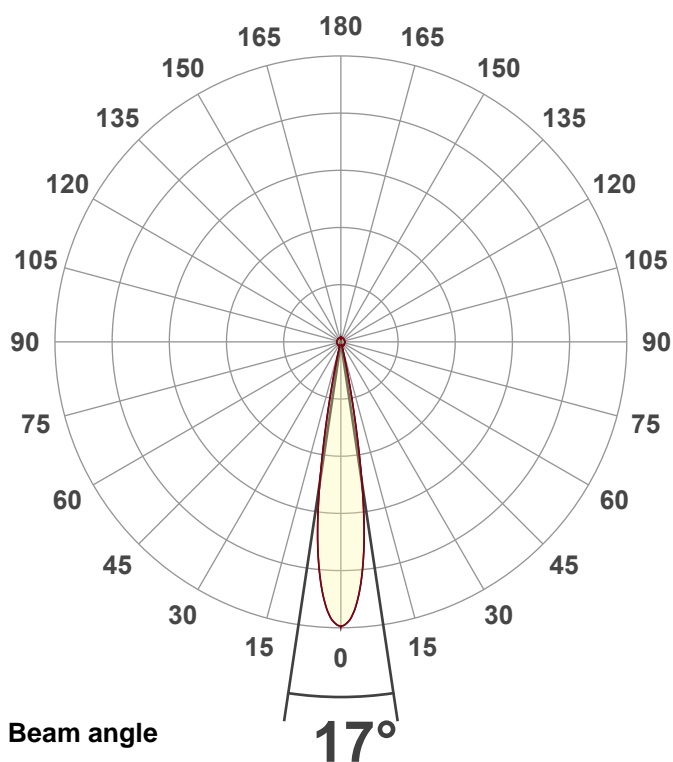


CIE 1931
x: 0.683
y: 0.296


Spectra

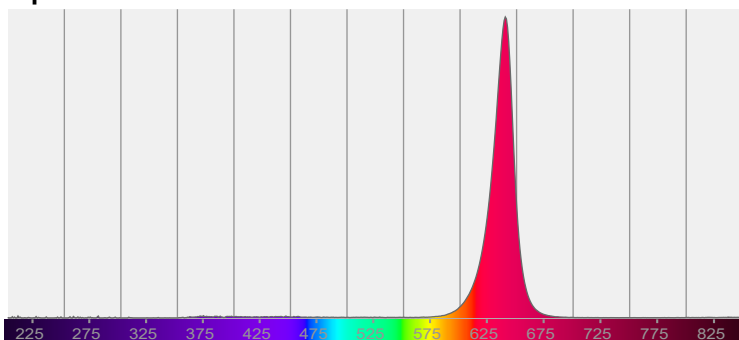


Power

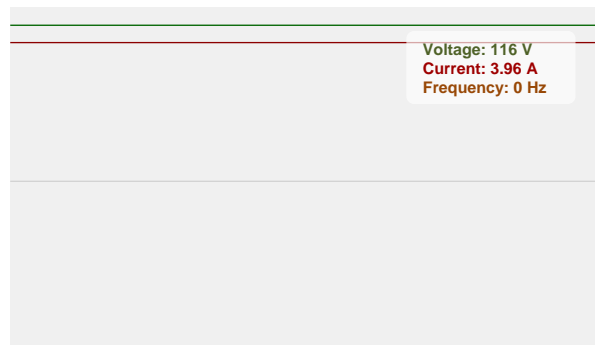

Color details

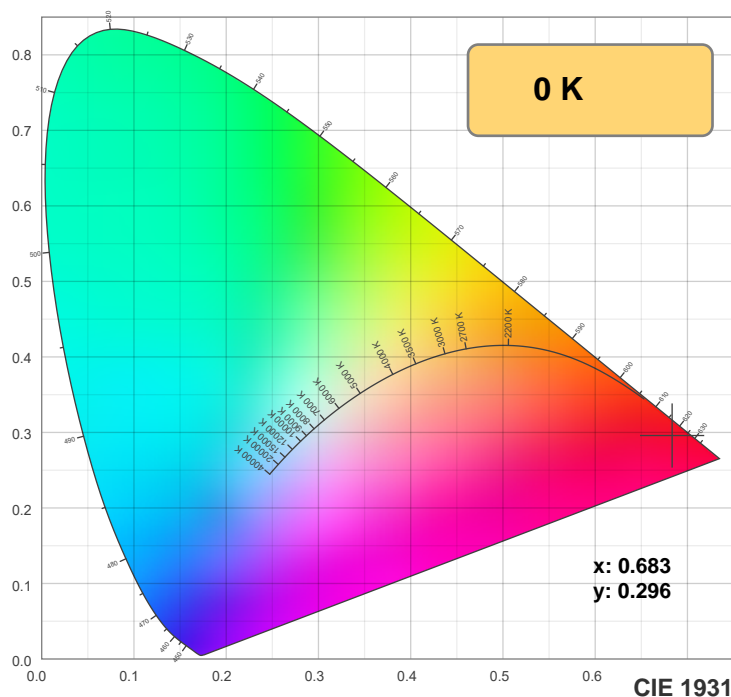

TM-30: 0.0

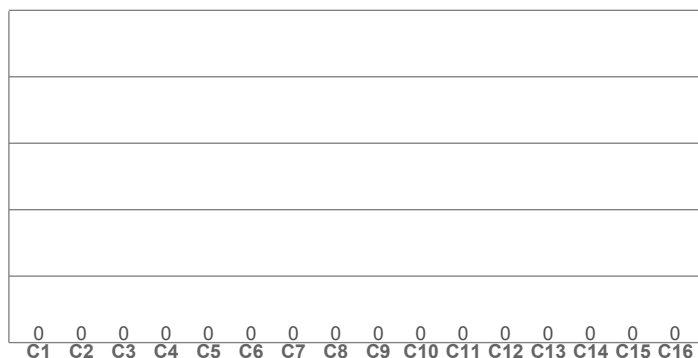

CRI R values, only R1-R8 are used to calculate final CRI value


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30 C values, 16 binned values out of total of 99 C values


C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

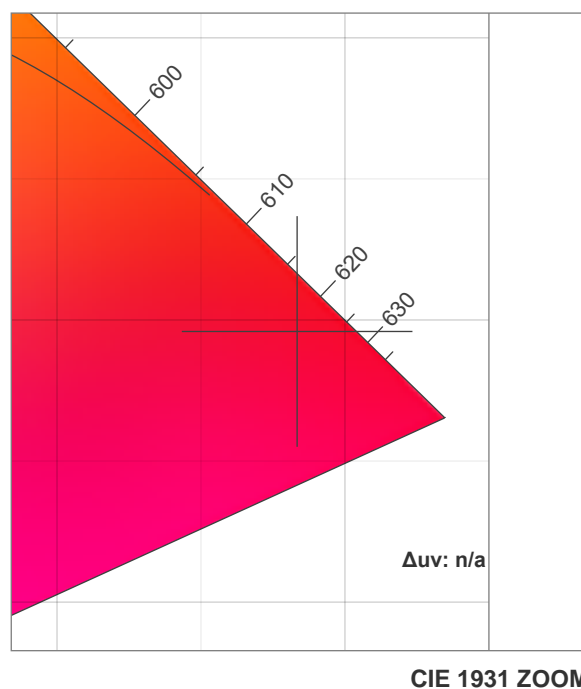

CRI: 0.0 (R1-R8)

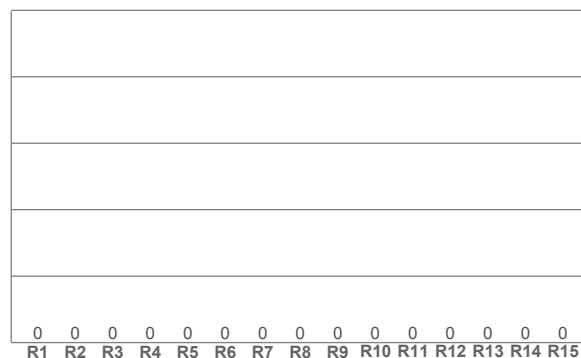

CQS: 0.0

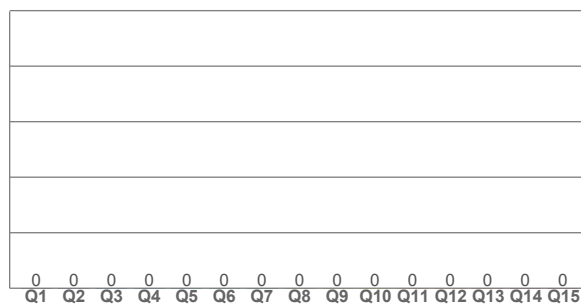

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.683	0.296	0.527	0.342	n/a

TM-30 details






Rf 0.0

Fidelity index Rf


Rg 0.0

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

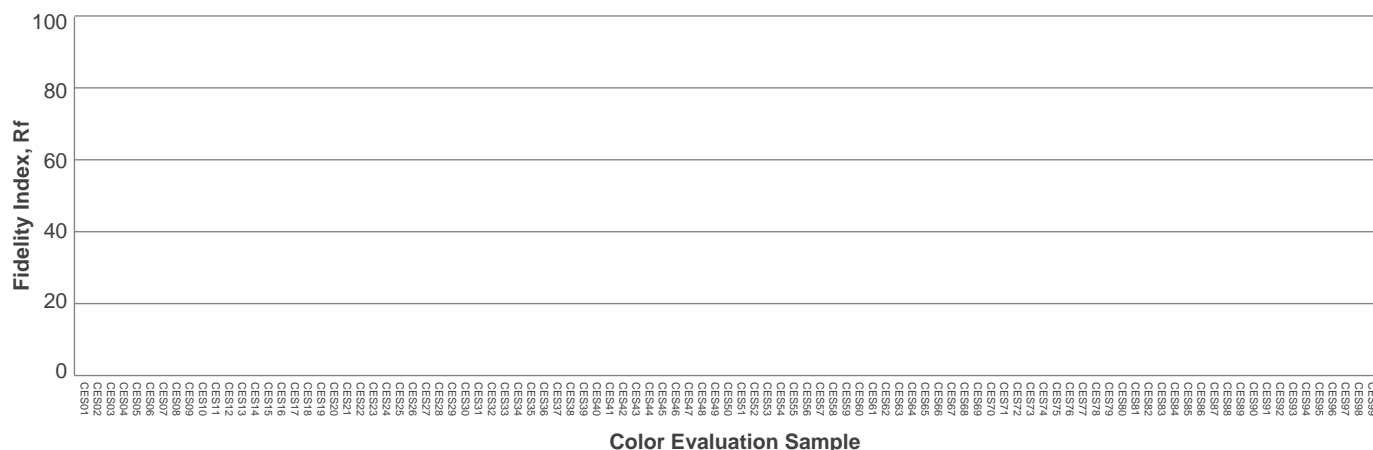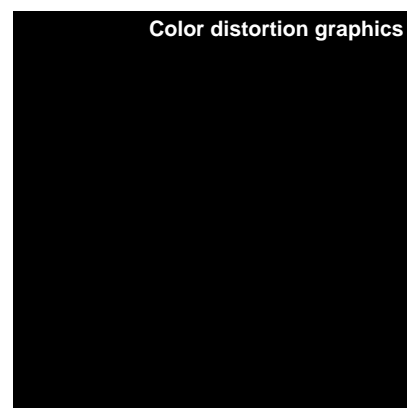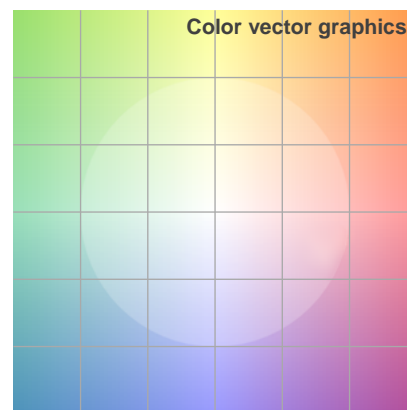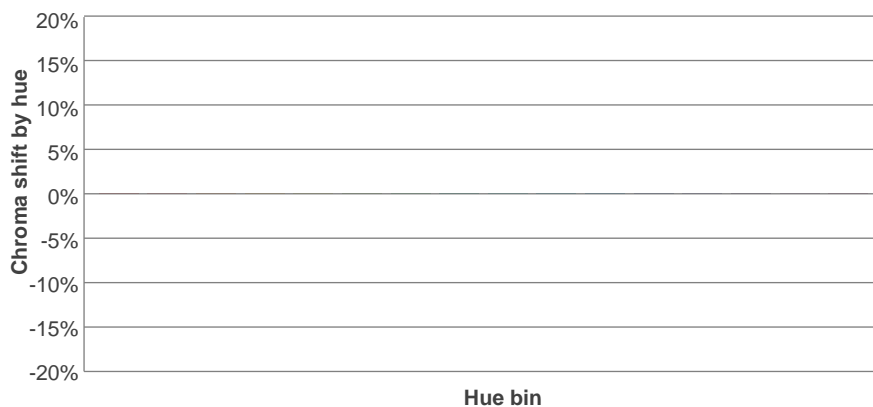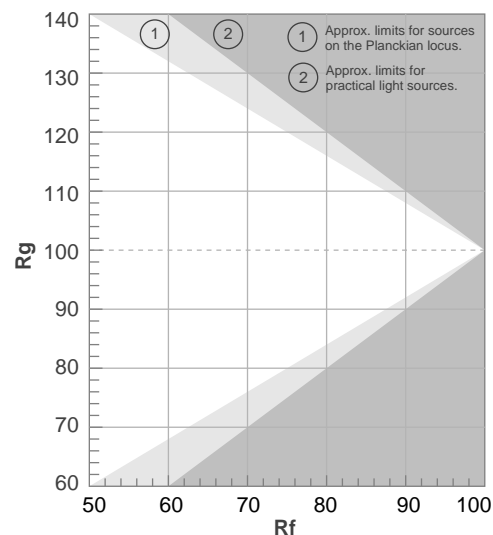

Beam details

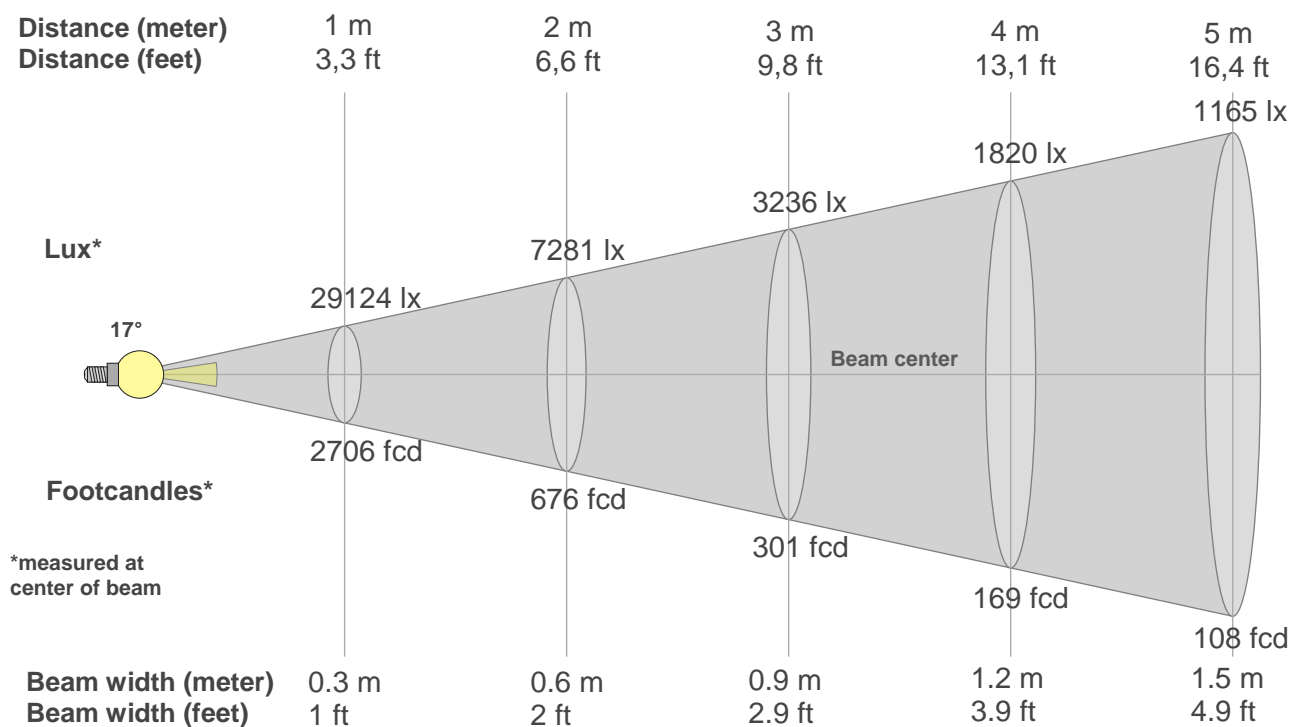

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
29124lx	7281lx	3236lx	1820lx	1165lx	809lx	594lx	455lx	360lx	291lx	241lx	202lx	172lx	149lx	129lx	114lx	101lx	90lx	81lx	73lx
2705.7fcd	676.4fcd	300.6fcd	169.1fcd	108.2fcd	75.2fcd	55.2fcd	42.3fcd	33.4fcd	27.1fcd	22.4fcd	18.8fcd	16fcd	13.8fcd	12fcd	10.6fcd	9.4fcd	8.4fcd	7.5fcd	6.8fcd

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
29.1k	28.9k	28.4k	27.4k	26.1k	24.3k	22.2k	19.6k	16.4k	12.8k	9.1k	5.9k	3.4k	1.8k	0.9k	0.6k	0.5k	0.5k	0.4k	0.4k
100%	99%	98%	94%	89%	83%	76%	67%	56%	44%	31%	20%	12%	6%	3%	2%	2%	2%	2%	2%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
29.1k	28.9k	28.4k	27.4k	26.1k	24.3k	22.2k	19.6k	16.4k	12.8k	9.1k	5.9k	3.4k	1.8k	0.9k	0.6k	0.5k	0.5k	0.4k	0.4k
100%	99%	98%	94%	89%	83%	76%	67%	56%	44%	31%	20%	12%	6%	3%	2%	2%	2%	2%	2%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
29.1k	28.9k	28.4k	27.4k	26.1k	24.3k	22.2k	19.6k	16.4k	12.8k	9.1k	5.9k	3.4k	1.8k	0.9k	0.6k	0.5k	0.5k	0.4k	0.4k
100%	99%	98%	94%	89%	83%	76%	67%	56%	44%	31%	20%	12%	6%	3%	2%	2%	2%	2%	2%

Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
29.1k	28.9k	28.4k	27.4k	26.1k	24.3k	22.2k	19.6k	16.4k	12.8k	9.1k	5.9k	3.4k	1.8k	0.9k	0.6k	0.5k	0.5k	0.4k	0.4k
100%	99%	98%	94%	89%	83%	76%	67%	56%	44%	31%	20%	12%	6%	3%	2%	2%	2%	2%	2%


Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
17°	24.5°	28.8°	47.2%	39.8%

Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

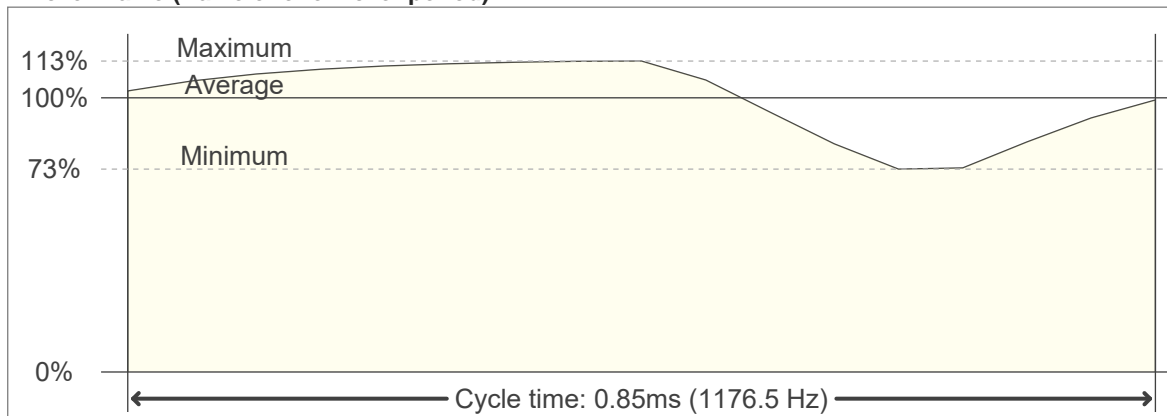

Flicker FFT (frequency scope of flicker curve)

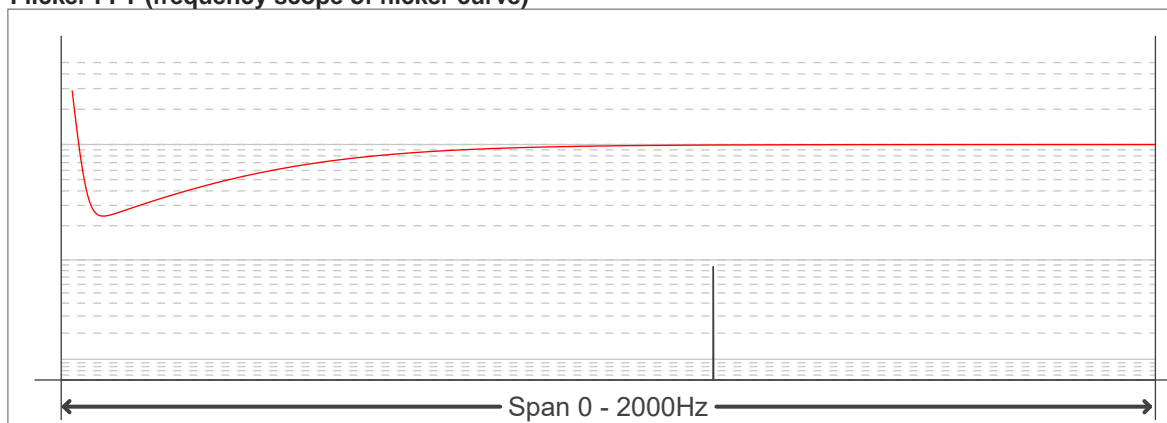

Flicker results:

Flicker frequency:		1176.47 Hz	
Flicker index:	0.06	JA8/10 40Hz	0.11 %
Flicker percentage:	36.93 %	JA8/10 90Hz	0.27 %
SVM: (Visual flicker)	0.18	JA8/10 200Hz	0.57 %
PstLM	0	JA8/10 400Hz	1.08 %
Mp	0.03	JA8/10 1000Hz	1.6 %

Flicker conditions:

Sample rate:	20000 samples/second
--------------	----------------------