



VIZI XTREME

- Ultra-fast and compact
- 360° continuous pan and tilt
- 4 x 60-watt RGBL primary LEDs
- RGBW LED ring

Ultra-fast and incredibly compact, but also extremely powerful, the Vizi Xtreme is a beam wash moving head offering powerful output, dynamic effects – including optional 360° continuous pan/tilt movement, and precise control. It features four, individually controlled, 60-watt RGBL color mixing LEDs surrounded by an additional ring of RGBW 'eye candy' LEDs. Designed for maximum versatility and speed, it delivers brilliant color mixing, motorized zoom from 3°–45°, and advanced control connectivity for professional lighting applications.

Designed for professional integration, the fixture offers a robust suite of control options, including DMX with RDM, sACN and ArtNet. As well as 5-pin DMX and RJ45 sockets for wired connection, the fixture features integrated Aria X2 wireless technology. This facilitates both cable free DMX control and wireless management with OTA firmware updates and NFC setup for streamlined configuration. An intuitive menu-driven interface for DMX addressing and configuration is also provided on the base of the unit via a full-color, 180° reversible LCD screen with 6-button touch control panel for streamlined operation.

With its exceptional speed, high-output LEDs, versatile pixel control, and advanced connectivity, the Vizi Xtreme sets a new benchmark for compact beam wash fixtures. It empowers lighting professionals to craft vivid, energetic, and intricately layered designs with total precision from a lightweight fixture built for professional environments with CE, FCC, and cETLus certifications.

VIZI
SERIES

www.ADJ.eu/vizi-xtreme

Light Source:

PRIMARY:

- 4x 60W RGBL LEDs
- Color Temperature: 2700K - 10,000K
- 20,000 Hour Average LED Life



Ring LED:

- 48x 2.5W RGBW LEDs
- 20,000 Hour Average LED Life

Photometric Data (Primary LEDs):

- 2,700 Lumens
- CRI: 60



Colors:

- Primary: 4x Red, Green, Blue and Lime
- Ring: 48x RGBW

Effects:

- Individual pixel control for primary RGBL LEDs
- Six-zone control for ring RGBW LED's (8 LEDs per zone)
- Motorized zoom range: 3°–45°
- Electronic strobe rate: 1Hz–10Hz

Control / Connections:

- (5) DMX Channel Modes (Basic 28 / Standard 40 / Extended 73 / Standard CMY 54 / Extended CMY63)
- DMX, RDM, sACN and ArtNet
- Aria X2 Wireless Management System
- NFC System
- 6-Button Touch Control Panel
- Full Color 180° Reversible LCD Menu Display
- 8 / 16 Bit Resolution Adjustable Movement
- IP20 5 pin XLR DMX In/Out
- IP20 RJ45 In/Out
- IP65 Locking Power In/Out




Pan / Tilt:

- Pan: 540/360° (360° Continuous Pan Rotation Option)
- Tilt: 270/360° (360° Continuous Tilt Rotation Option)
- Pan/Tilt Locks
- 3-Phase Motors

Dimensions & Weight:

- Length: 276mm
- Width: 200mm
- Vertical Height: 364.2mm
- Weight: 7kg

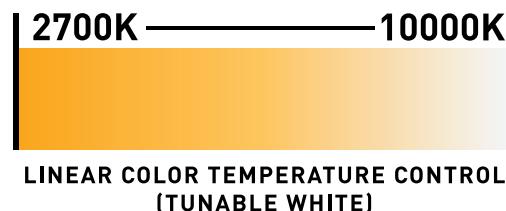

Electrical / Thermal:

- AC 100-240V - 50/60Hz
- Max Power Consumption: 675W
- Power Link: 10 units @ 230V.
- Max ambient temperature: -25°C to 45°C



Technical Data:

- BTU: 0.64
- BTU/H: 2301.75

What's Included:

- (1) Outdoor Locking Power cable (2m)
- (2) Omega brackets (107mm)
- (1) TÜV-tested Safety Cable, 3mm (0.6m)

Approvals:

- IP20

Specifications subject to change without notice

