

Light efficiency:

73 Lumen/Watt

Light quality:

CRI: 0.0

Color temperature:

0 K

Output: 12623 lm

Peak: 91595 cd

Power: 172.7 W

PF: 1.0

No photo


Product name:

40 Hex Panel IP (Full On,Lime)

Item number:


Date and time:

10/9/2025 11:45:30 AM

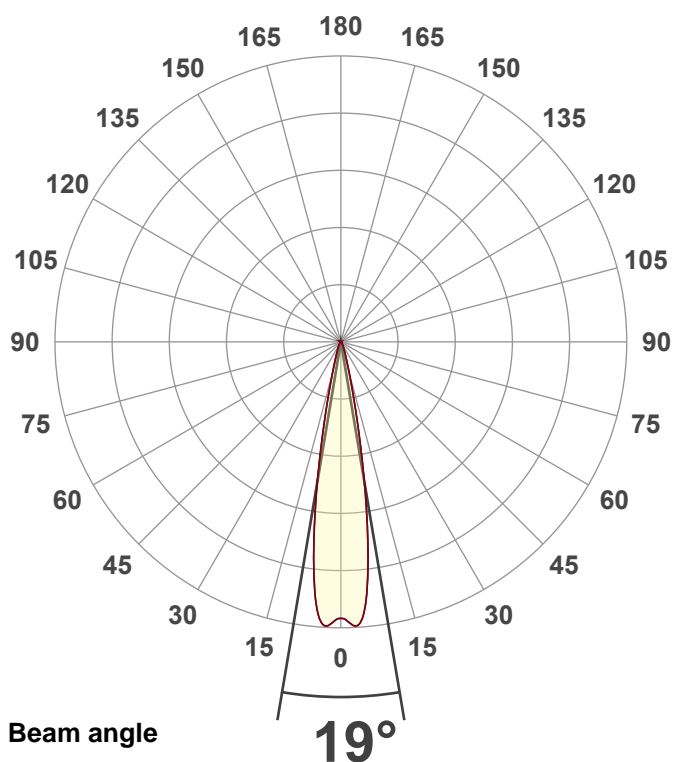



CIE 1931
x: 0.355
y: 0.527

Spectra

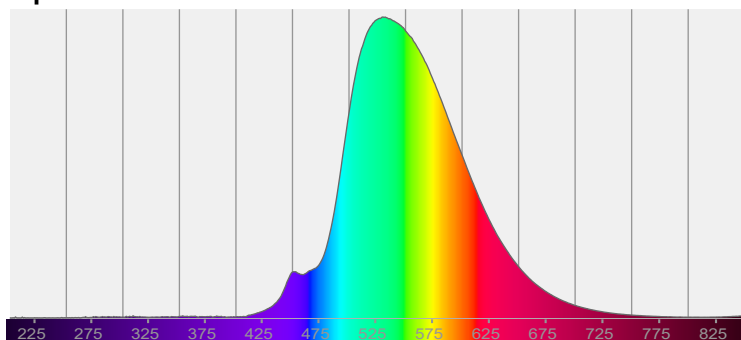


Power


Voltage: 118 V
Current: 1.46 A
Frequency: 0 Hz

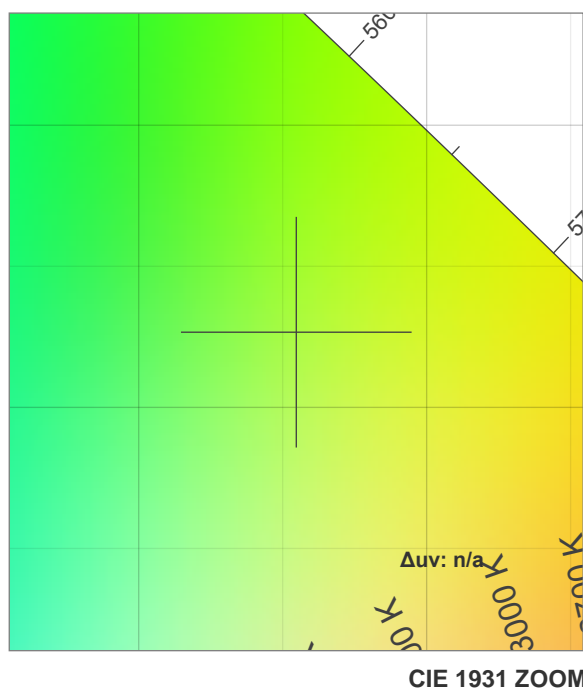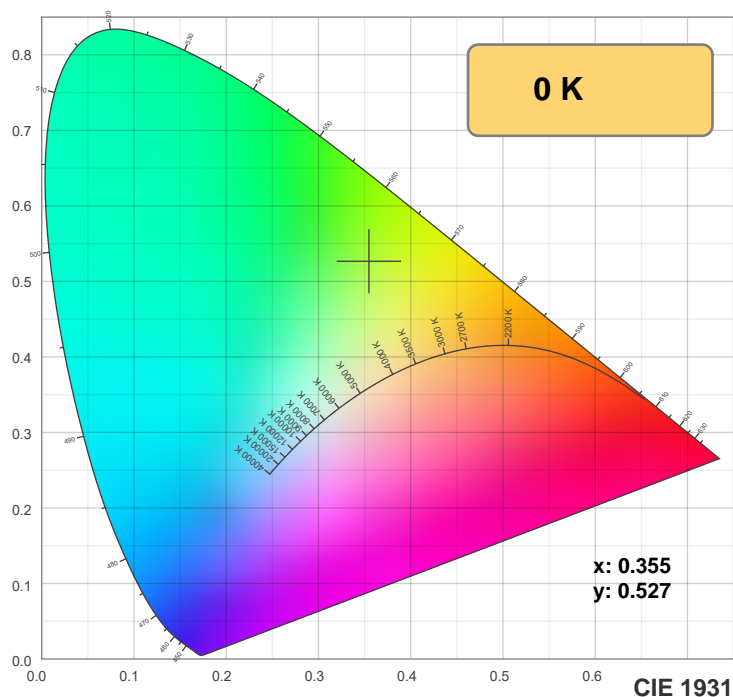

TM-30: 0.0

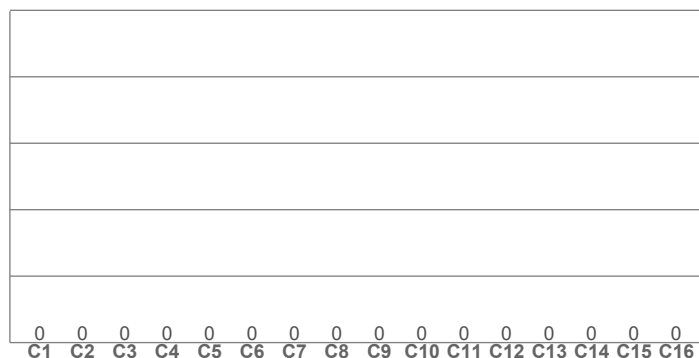

CRI: 0.0 (R1-R8)

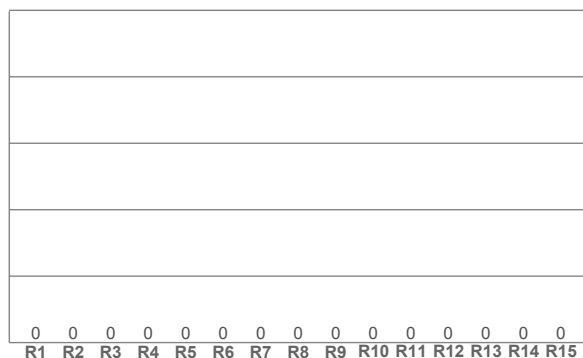

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS: 0.0

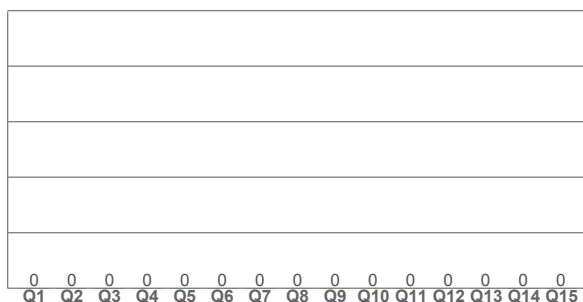

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.355	0.527	0.165	0.367	n/a

TM-30 details





Rf 0.0

Fidelity index Rf


Rg 0.0

Gamut index Rg

Hue Bin	R _i	Shifts (%)	
		Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

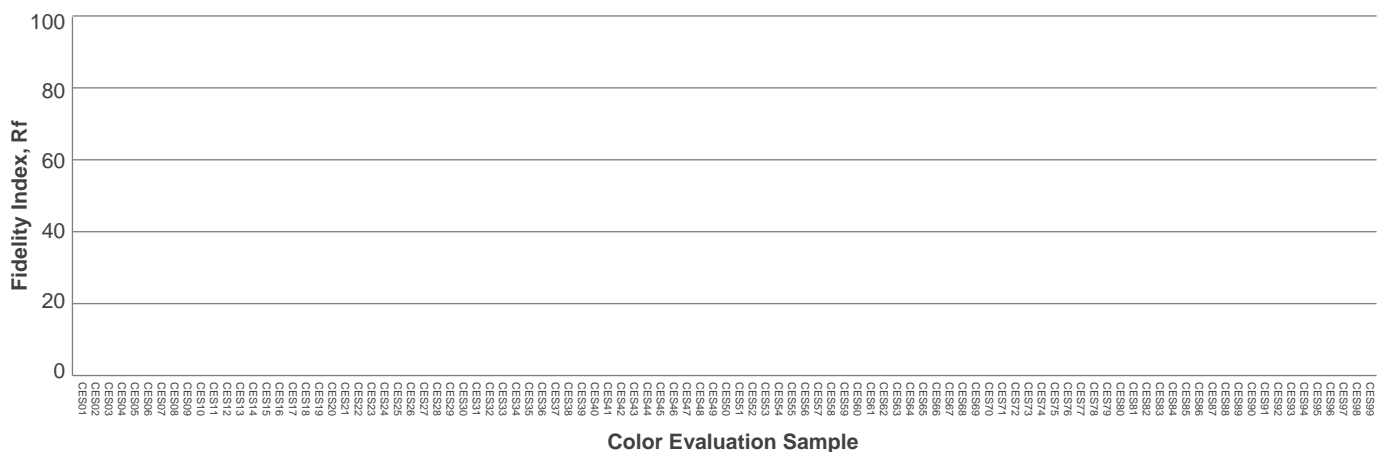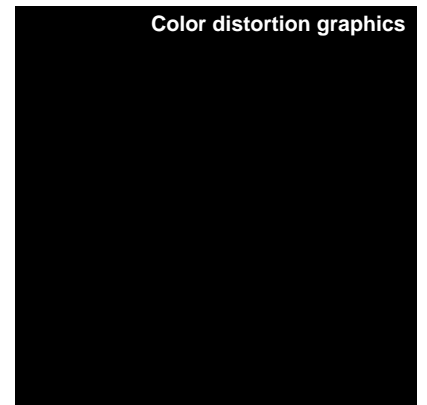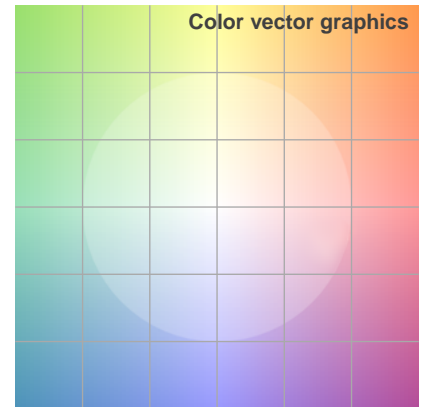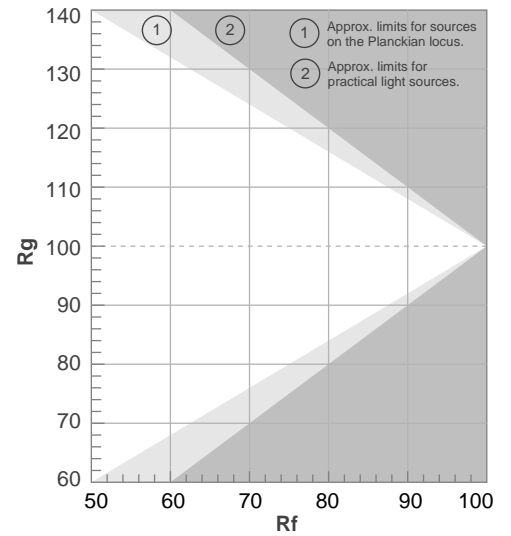

Beam details

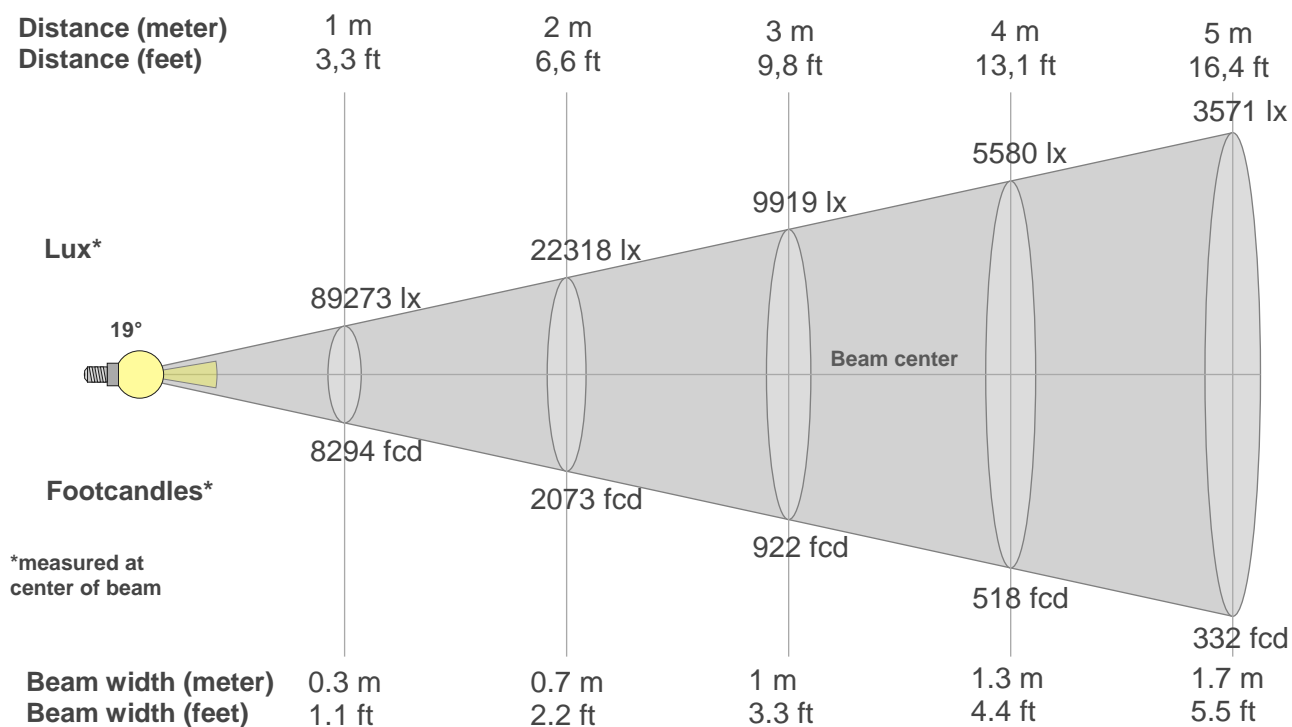

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
89273lx	22318lx	9919lx	5580lx	3571lx	2480lx	1822lx	1395lx	1102lx	893lx	738lx	620lx	528lx	455lx	397lx	349lx	309lx	276lx	247lx	223lx
8293.8fcd	2073.4fcd	921.5fcd	518.4fcd	331.8fcd	230.4fcd	169.3fcd	129.6fcd	102.4fcd	82.9fcd	68.5fcd	57.6fcd	49.1fcd	42.3fcd	36.9fcd	32.4fcd	28.7fcd	25.6fcd	23fcd	20.7fcd

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
89.3k	89.7k	90.8k	91.5k	90.3k	86.7k	80.3k	71.6k	61.7k	51.3k	41.0k	31.7k	24.1k	18.1k	13.6k	10.5k	8.3k	6.7k	5.5k	4.6k
100%	100%	102%	102%	101%	97%	90%	80%	69%	57%	46%	36%	27%	20%	15%	12%	9%	8%	6%	5%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
89.3k	89.7k	90.8k	91.5k	90.3k	86.7k	80.3k	71.6k	61.7k	51.3k	41.0k	31.7k	24.1k	18.1k	13.6k	10.5k	8.3k	6.7k	5.5k	4.6k
100%	100%	102%	102%	101%	97%	90%	80%	69%	57%	46%	36%	27%	20%	15%	12%	9%	8%	6%	5%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
89.3k	89.7k	90.8k	91.5k	90.3k	86.7k	80.3k	71.6k	61.7k	51.3k	41.0k	31.7k	24.1k	18.1k	13.6k	10.5k	8.3k	6.7k	5.5k	4.6k
100%	100%	102%	102%	101%	97%	90%	80%	69%	57%	46%	36%	27%	20%	15%	12%	9%	8%	6%	5%

Intensities in 270° c-plane


0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
89.3k	89.7k	90.8k	91.5k	90.3k	86.7k	80.3k	71.6k	61.7k	51.3k	41.0k	31.7k	24.1k	18.1k	13.6k	10.5k	8.3k	6.7k	5.5k	4.6k
100%	100%	102%	102%	101%	97%	90%	80%	69%	57%	46%	36%	27%	20%	15%	12%	9%	8%	6%	5%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
19°	31.1°	47.6°	96.7%	93.9%


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

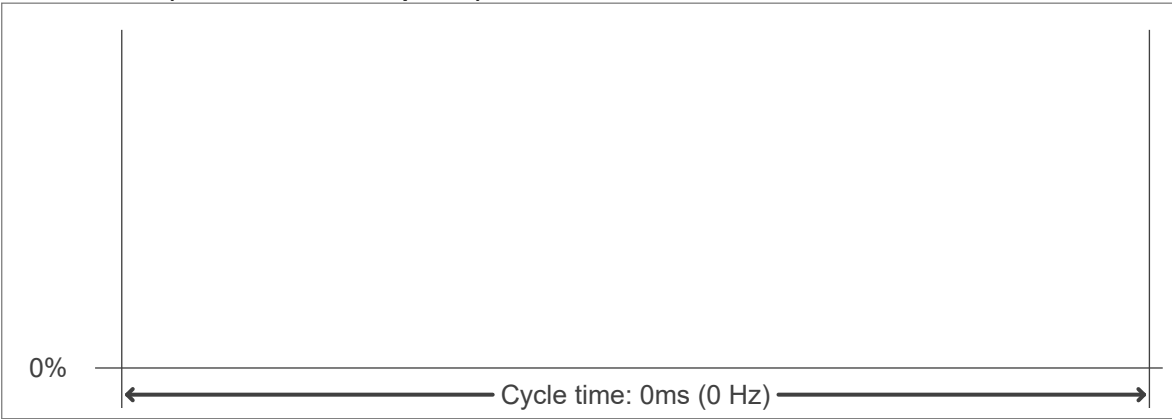

Flicker FFT (frequency scope of flicker curve)

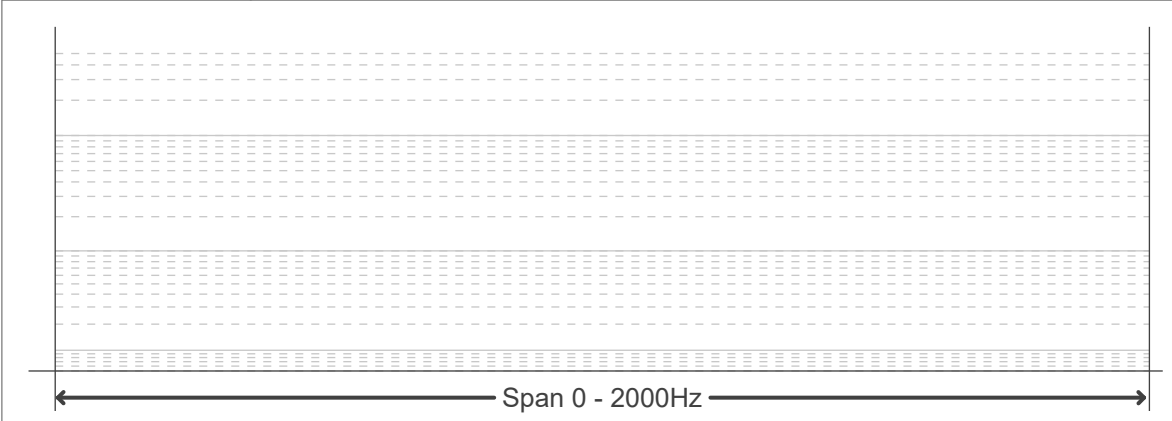

Flicker results:

Flicker frequency:		n/a Hz	
Flicker index:	n/a	JA8/10 40Hz	n/a %
Flicker percentage:	n/a %	JA8/10 90Hz	n/a %
SVM: (Visual flicker)	n/a	JA8/10 200Hz	n/a %
PstLM	n/a	JA8/10 400Hz	n/a %
Mp	n/a	JA8/10 1000Hz	n/a %

Flicker conditions:

Sample rate:	n/a samples/second
--------------	--------------------