Light efficiency:

47 Lumen/Watt

Light quality:

CRI: 53.7

Color temperature:

1869 K

Output: 5012 lm

Peak: 4967 cd

Power: 106.6 W

PF: 1.0

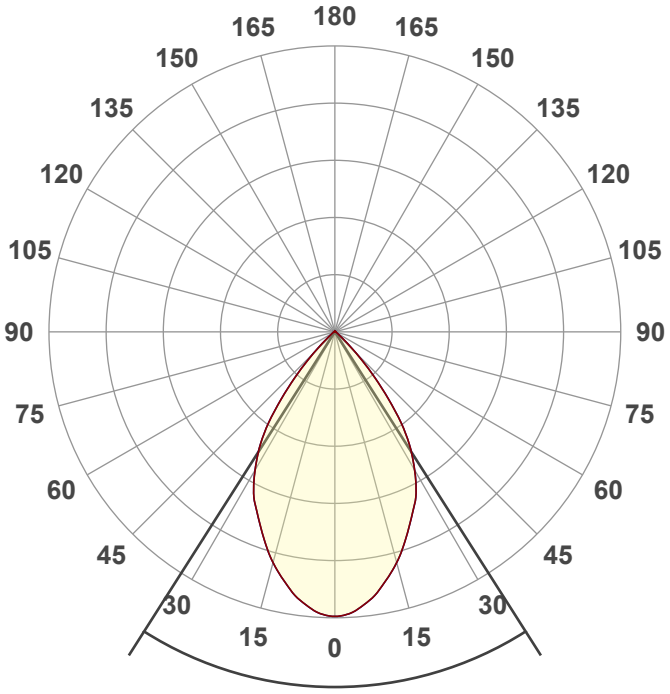

Beam angle 65°

Product name:
Encore DBX (Full on,Amber)

Item number:

Date and time:
6/30/2026 12:25:45 PM

CIE 1931
x: 0.559
y: 0.432

Spectra

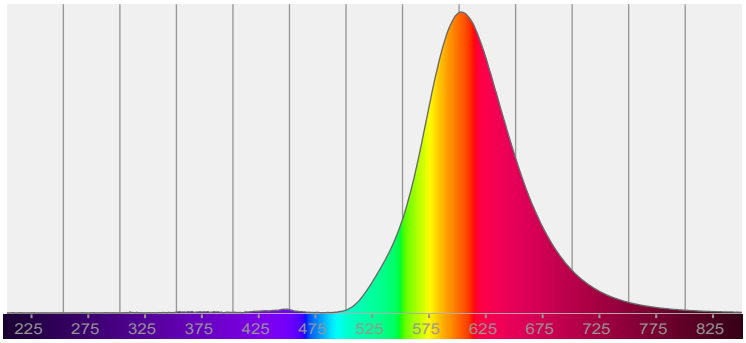

Power

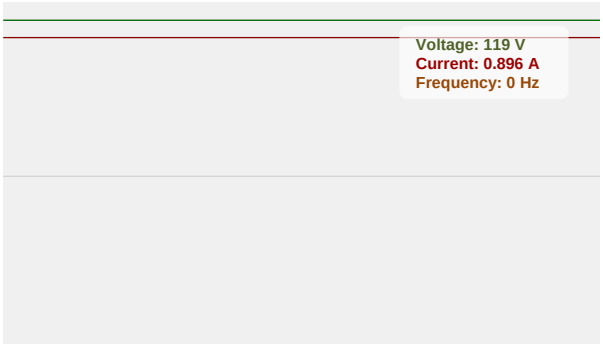

Color details

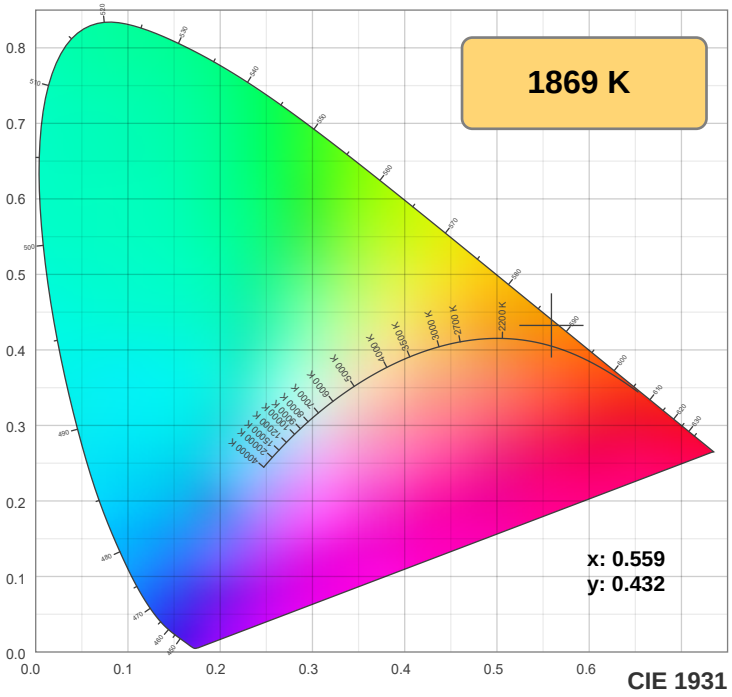

CIE 1931

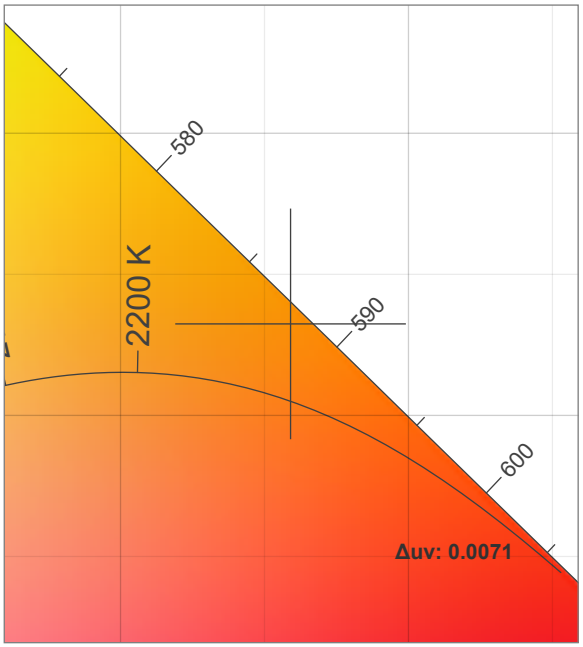

CIE 1931 ZOOM

TM-30: 55.2

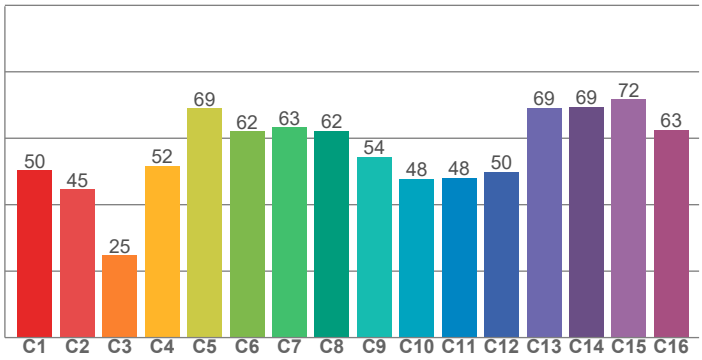

CRI: 53.7 (R1-R8)

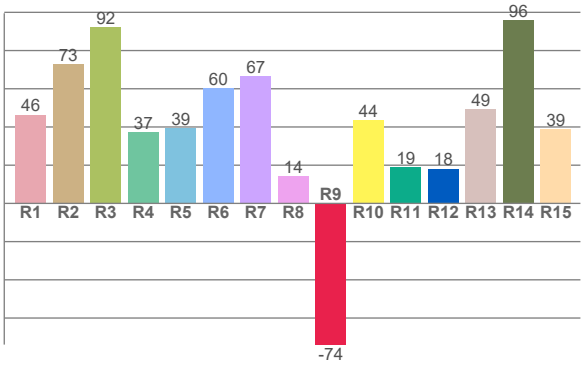

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
46.4	72.9	92.1	37.4	39.5	60.3	66.7	14.1	-73.9	43.6	19.0	18.1	49.3	95.9	38.9

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
50.3	44.6	24.8	51.8	69.0	62.0	63.3	62.3	54.4	47.8	48.0	49.9	69.1	69.4	71.7	62.6

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
55.0	49.4	23.6	19.8	25.8	34.5	46.9	33.6	2.8	0.1	0.0	0.1	0.8	2.1	30.4

CQS: 7.0

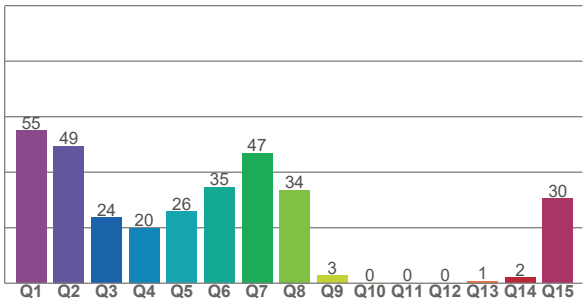

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
1869 K	53.7	-73.9	55.2	51.2	7.0	0.559	0.432	0.316	0.367	0.0071

TM-30 details

Rf 55.2

Fidelity index Rf

Rg 51.2

Gamut index Rg

		Shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	50	-24%	-10%
2	45	-31%	-11%
3	25	-39%	-10%
4	52	-38%	1%
5	69	-38%	5%
6	62	-29%	12%
7	63	-25%	3%
8	62	-28%	-1%
9	54	-23%	-9%
10	48	-31%	-4%
11	48	-31%	7%
12	50	-28%	12%
13	69	-32%	5%
14	69	-26%	-7%
15	72	-17%	0%
16	63	-24%	-5%

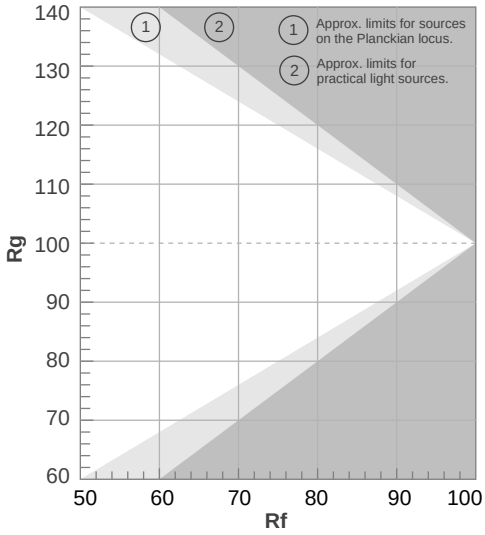

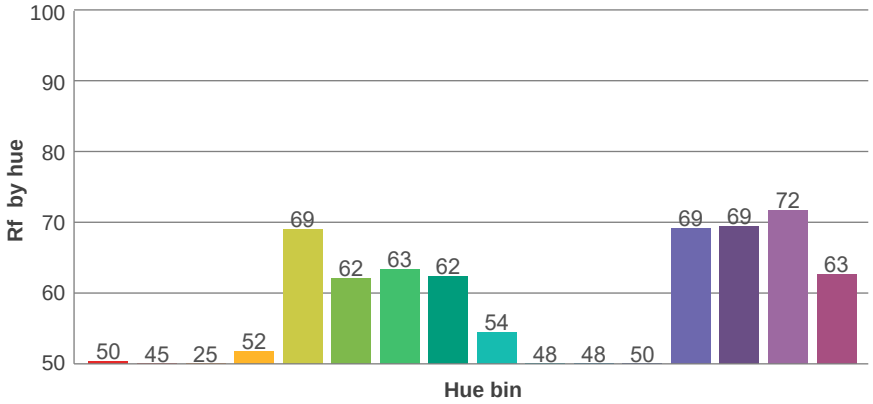

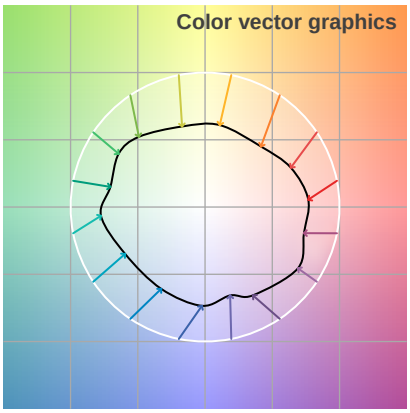

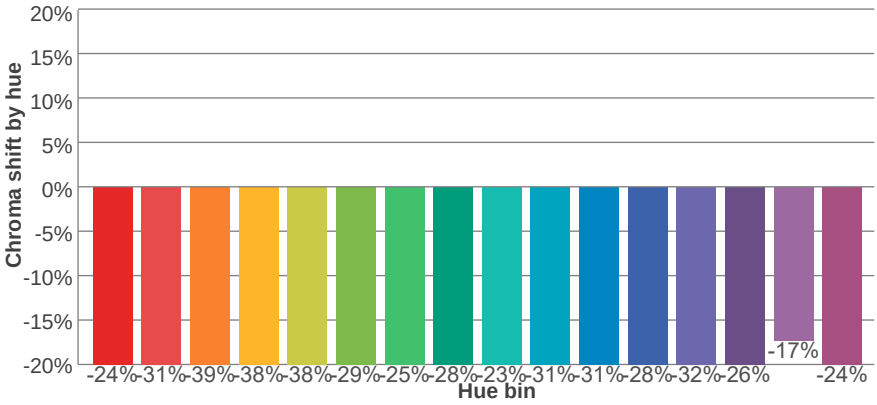

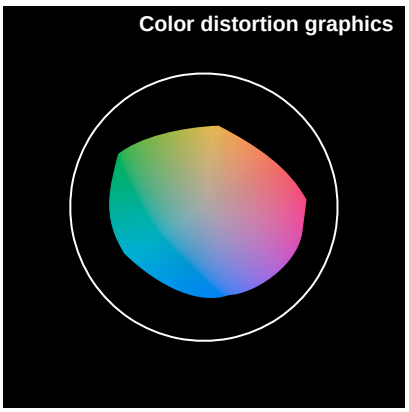

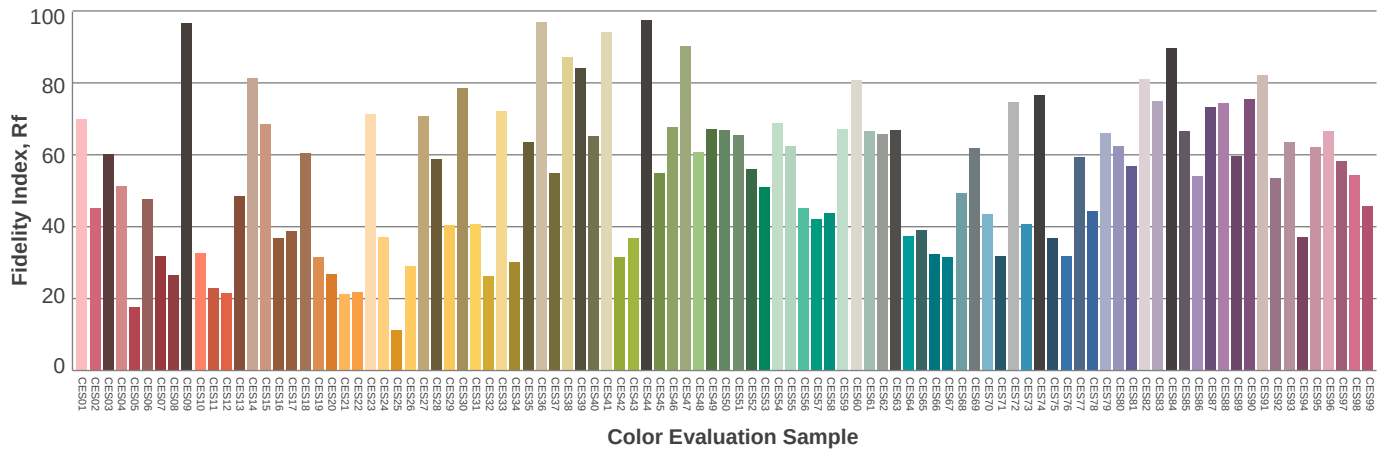

Beam details

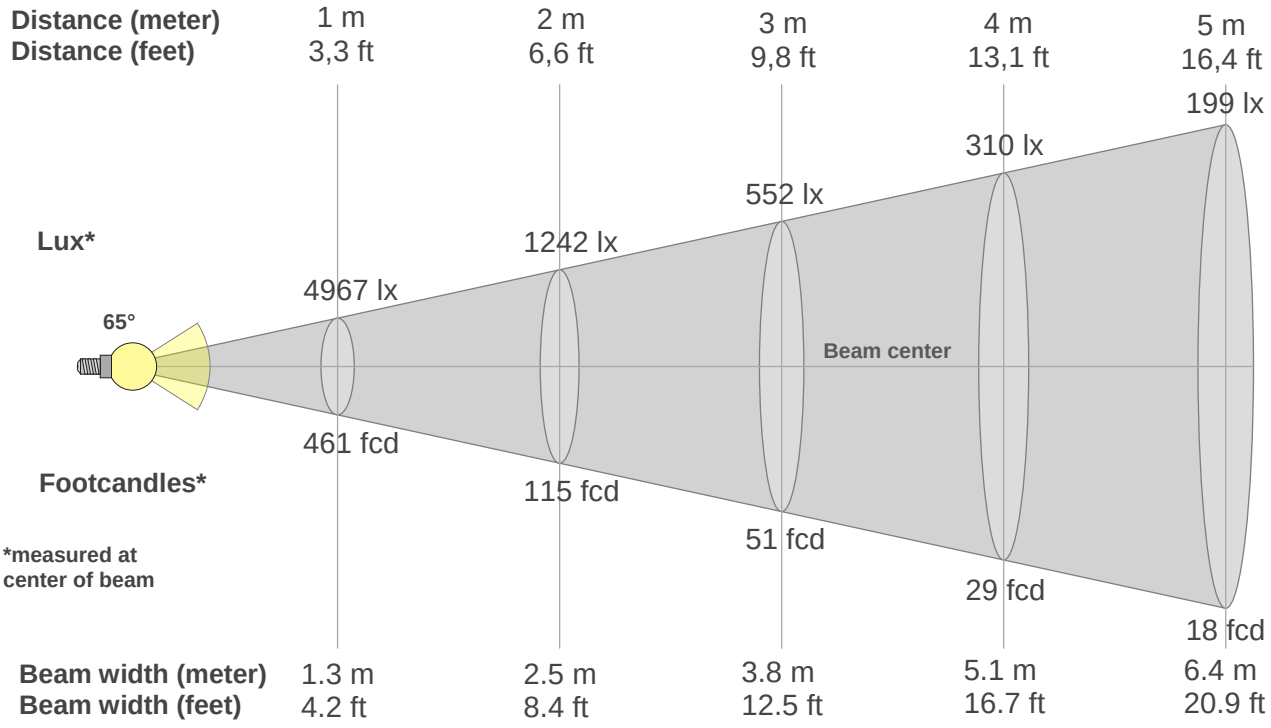

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
4967lx	1242lx	552lx	310lx	199lx	138lx	101lx	78lx	61lx	50lx	41lx	34lx	29lx	25lx	22lx	19lx	17lx	15lx	14lx	12lx
461.5fc	115.4fc	51.3fcd	28.8fcd	18.5fcd	12.8fcd	9.4fcd	7.2fcd	5.7fcd	4.6fcd	3.8fcd	3.2fcd	2.7fcd	2.4fcd	2.1fcd	1.8fcd	1.6fcd	1.4fcd	1.3fcd	1.2fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4967	4947	4894	4801	4693	4556	4406	4254	4091	3908	3725	3548	3381	3225	3017	2787	2544	2284	1979	1611
100%	100%	99%	97%	94%	92%	89%	86%	82%	79%	75%	71%	68%	65%	61%	56%	51%	46%	40%	32%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4967	4947	4894	4801	4693	4556	4406	4254	4091	3908	3725	3548	3381	3225	3017	2787	2544	2284	1979	1611
100%	100%	99%	97%	94%	92%	89%	86%	82%	79%	75%	71%	68%	65%	61%	56%	51%	46%	40%	32%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4967	4947	4894	4801	4693	4556	4406	4254	4091	3908	3725	3548	3381	3225	3017	2787	2544	2284	1979	1611
100%	100%	99%	97%	94%	92%	89%	86%	82%	79%	75%	71%	68%	65%	61%	56%	51%	46%	40%	32%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4967	4947	4894	4801	4693	4556	4406	4254	4091	3908	3725	3548	3381	3225	3017	2787	2544	2284	1979	1611
100%	100%	99%	97%	94%	92%	89%	86%	82%	79%	75%	71%	68%	65%	61%	56%	51%	46%	40%	32%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
65°	**90.6°**	**103.2°**	**98.6%**	**94.6%**

Flicker

Flicker curve (complete sampled flicker signal)

Flicker frame (frame of one flicker period)

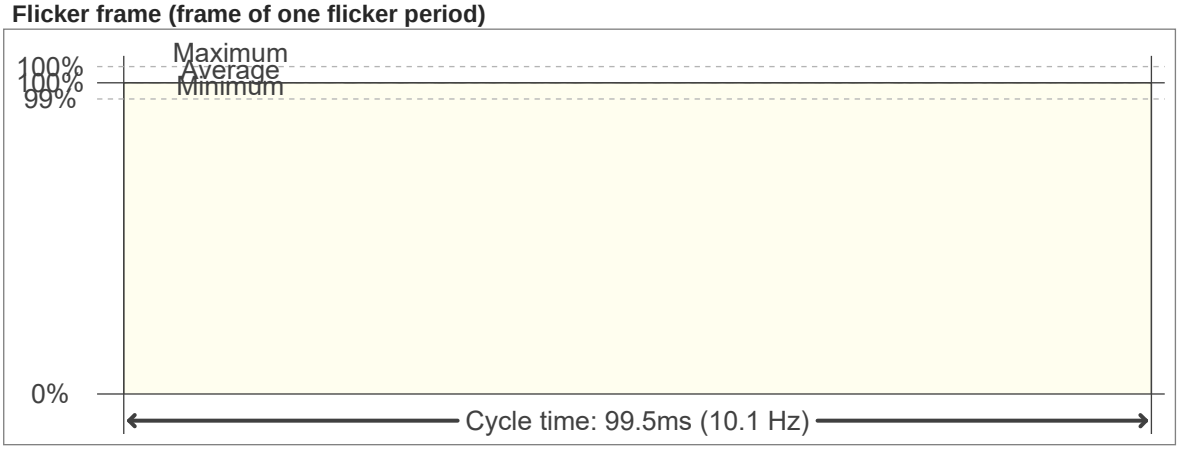

Flicker FFT (frequency scope of flicker curve)

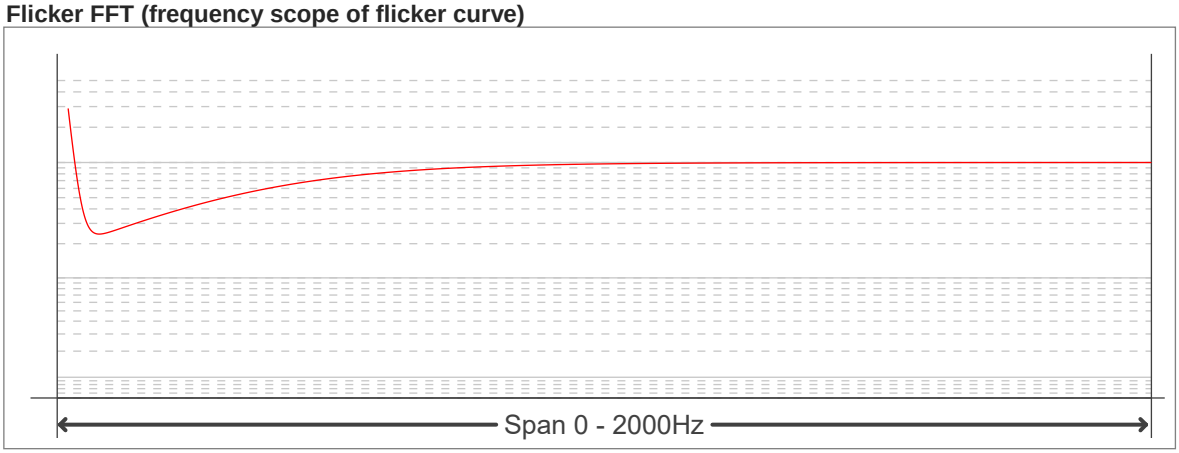

Flicker results:

Flicker frequency:		10.05 Hz	
Flicker index:	0	JA8/10 40Hz	0.06 %
Flicker percentage:	0.11 %	JA8/10 90Hz	0.07 %
SVM: (Visual flicker)	0	JA8/10 200Hz	0.08 %
PstLM	0.01	JA8/10 400Hz	0.08 %
Mp	0.02	JA8/10 1000Hz	0.1 %

Flicker conditions:

Sample rate:	20000 samples/second