Light efficiency:

17 Lumen/Watt

Light quality:

CRI: 74.0

Color temperature:

2719 K

Output: 2300 lm

Peak: 35448 cd

Power: 135.9 W

PF: 1.0

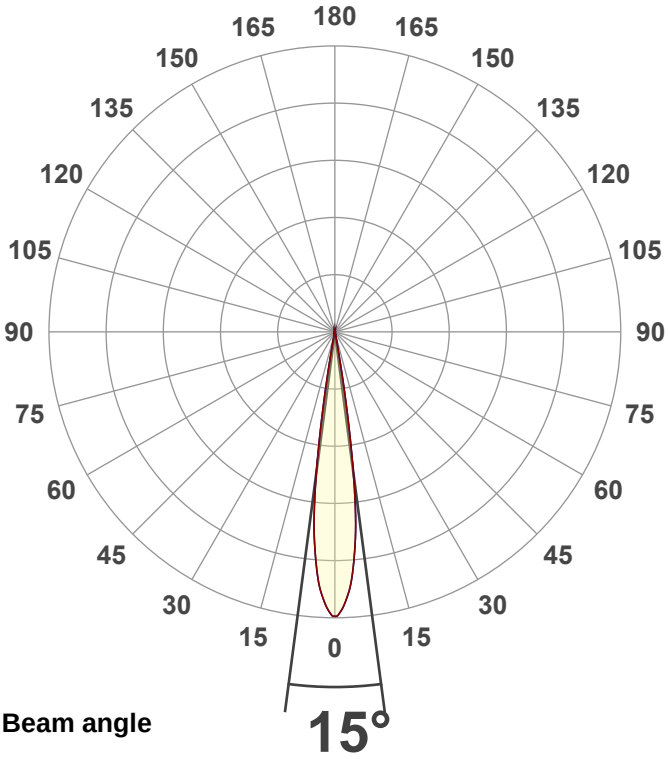

Beam angle 15°

Product name:
Vizi Xtreme (Full On,2700K)

Item number:

Date and time:
8/26/2026 9:50:12 AM

CIE 1931
x: 0.476
y: 0.442

Spectra

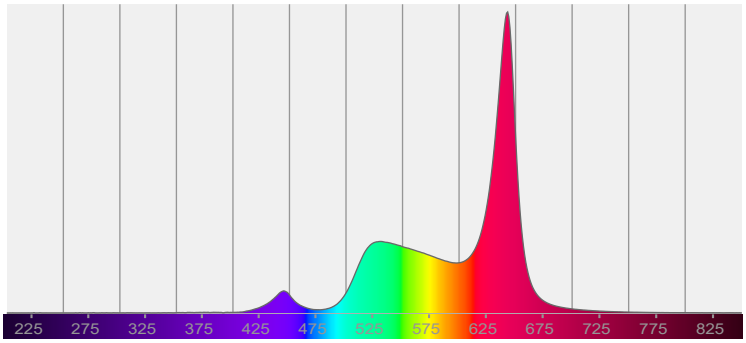

Power

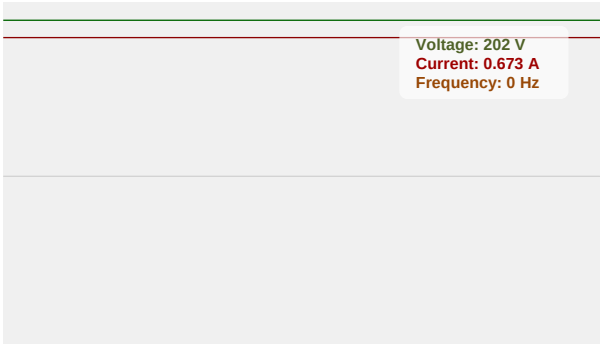

Color details

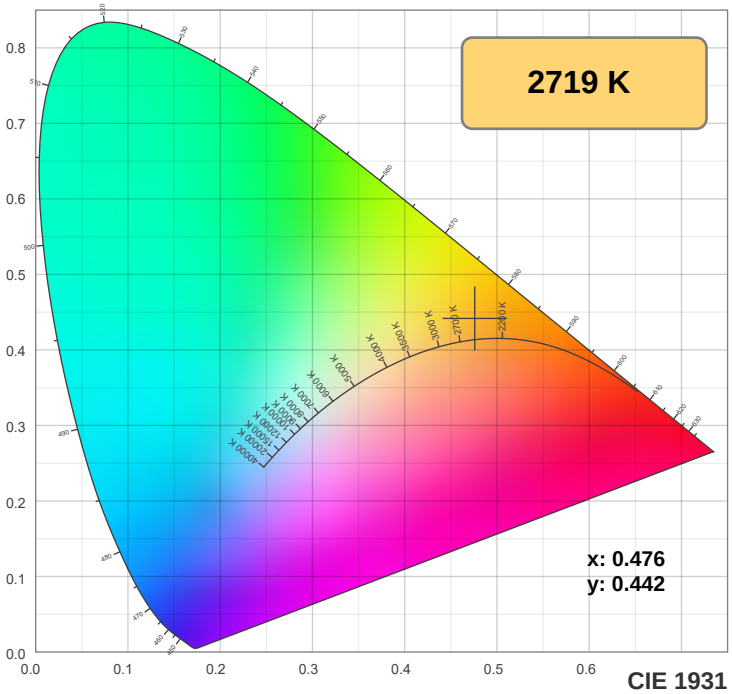

CIE 1931

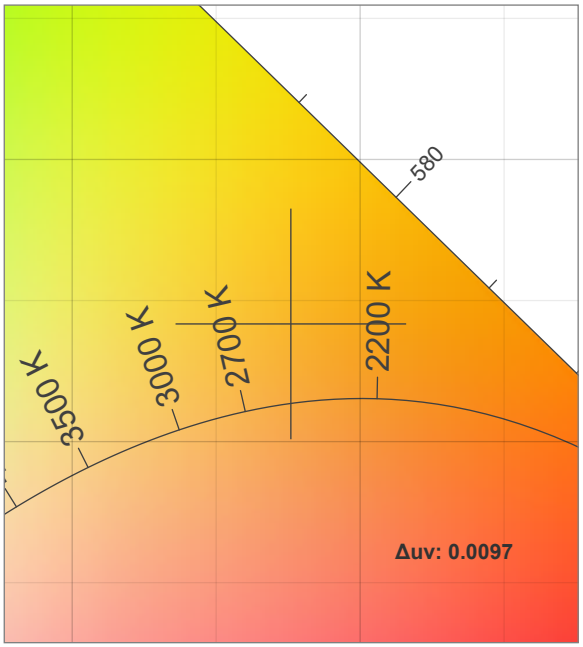

CIE 1931 ZOOM

TM-30: 82.8

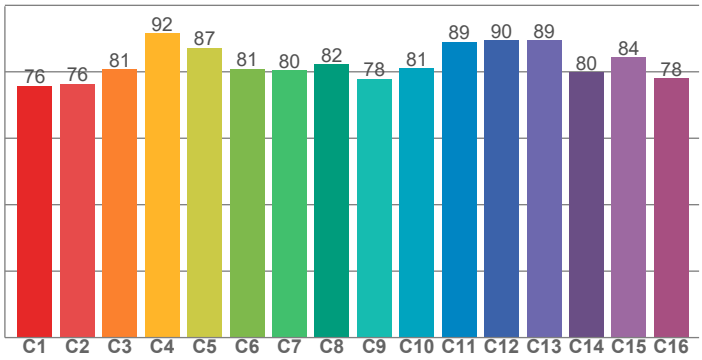

CRI: 74.0 (R1-R8)

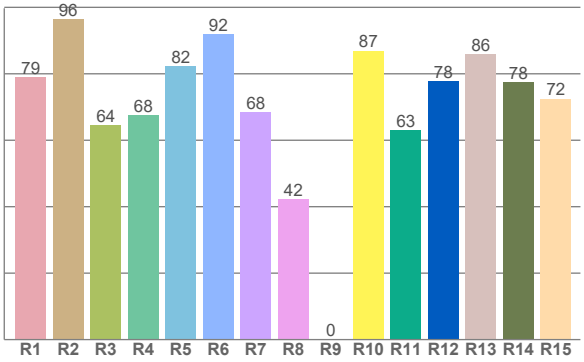

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
79.0	96.5	64.5	67.6	82.2	91.9	68.3	42.3	0.0	86.9	63.1	77.7	85.9	77.5	72.5

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
75.7	76.4	80.7	91.5	87.3	80.9	80.5	82.2	77.8	81.0	89.0	89.5	89.4	79.9	84.3	78.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
86.7	94.9	84.2	76.1	71.8	72.8	92.9	77.1	70.6	63.1	58.6	61.4	65.8	81.7	91.6

CQS: 73.8

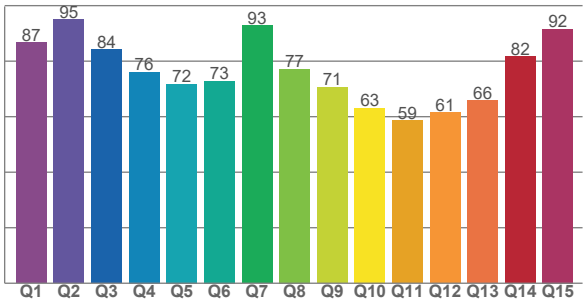

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2719 K	74.0	0.0	82.8	107.2	73.8	0.476	0.442	0.259	0.361	0.0097

TM-30 details

Rf 82.8

Fidelity index Rf

Rg 107.2

Gamut index Rg

		Shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	76	11%	-6%
2	76	7%	-11%
3	81	0%	-10%
4	92	-1%	0%
5	87	2%	8%
6	81	6%	10%
7	80	13%	2%
8	82	9%	-6%
9	78	4%	-12%
10	81	-3%	-13%
11	89	-6%	-5%
12	90	-3%	3%
13	89	0%	8%
14	80	3%	17%
15	84	9%	5%
16	78	15%	5%

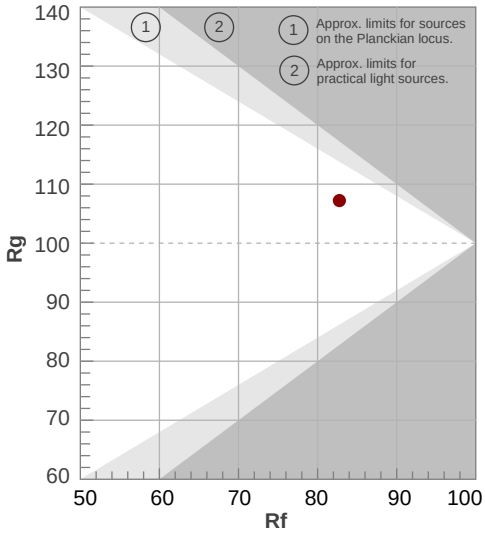

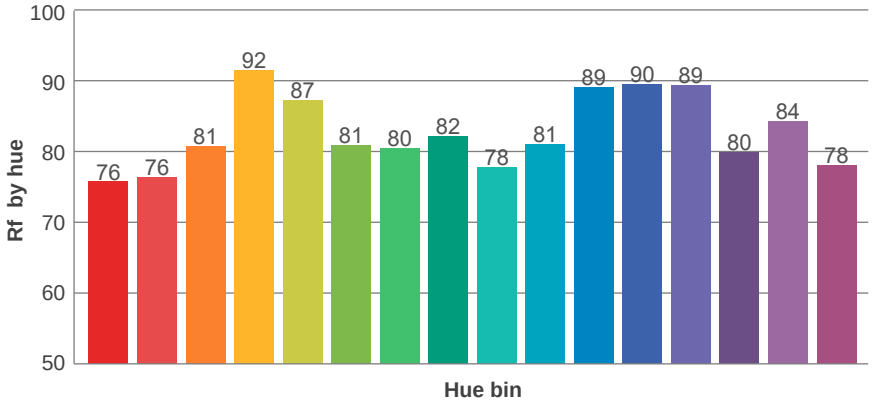

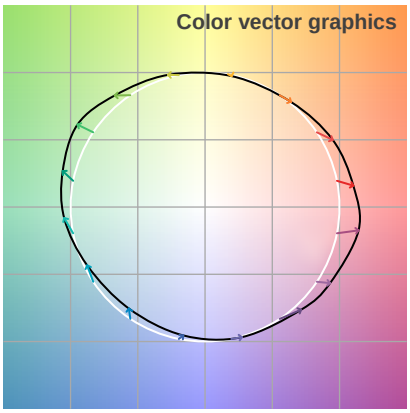

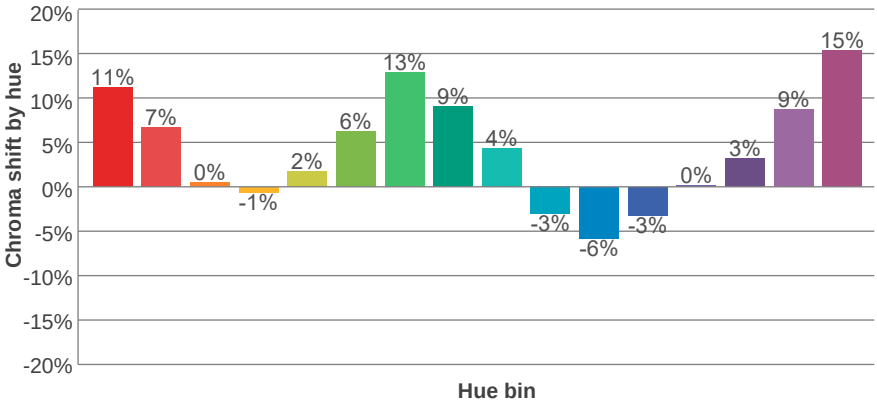

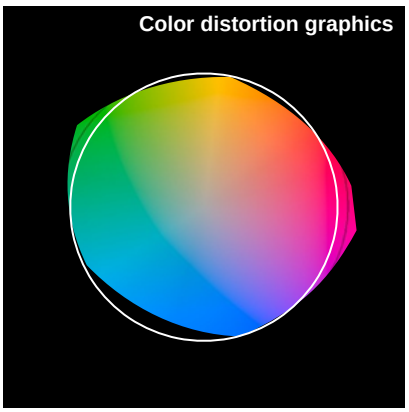

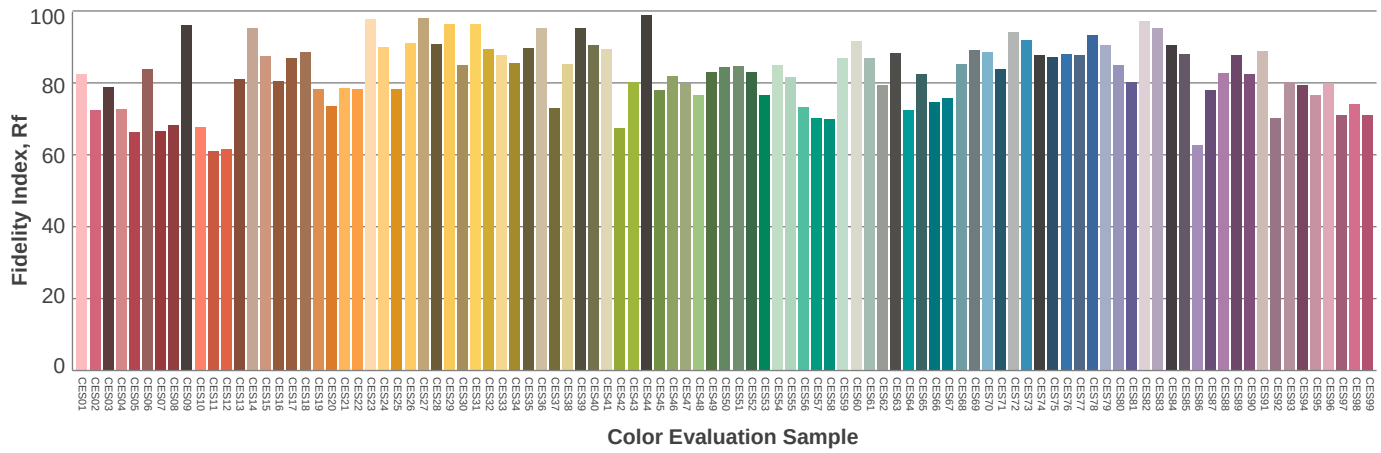

Beam details

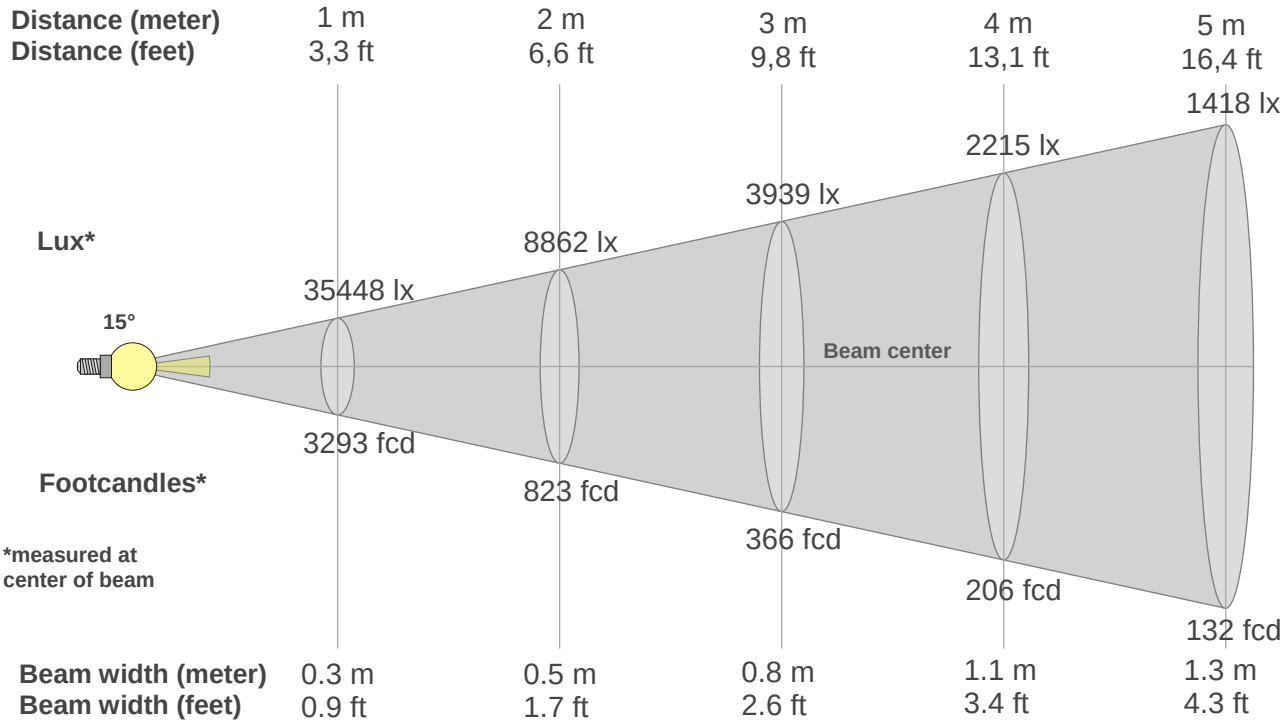

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
35448lx	8862lx	3939lx	2215lx	1418lx	985lx	723lx	554lx	438lx	354lx	293lx	246lx	210lx	181lx	158lx	138lx	123lx	109lx	98lx	89lx
3293.2fcd	823.3fcd	365.9fcd	205.8fcd	131.7fcd	91.5fcd	67.2fcd	51.5fcd	40.7fcd	32.9fcd	27.2fcd	22.9fcd	19.5fcd	16.8fcd	14.6fcd	12.9fcd	11.4fcd	10.2fcd	9.1fcd	8.2fcd

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
35.4k	35.0k	34.0k	32.6k	30.6k	27.9k	24.8k	20.3k	14.6k	8.6k	3.8k	1.2k	0.2k	0.1k	0.0k	0.0k	0.0k	0.0k	0.0k	0.0k
100%	99%	96%	92%	86%	79%	70%	57%	41%	24%	11%	3%	1%	0%	0%	0%	0%	0%	0%	0%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
35.4k	35.0k	34.0k	32.6k	30.6k	27.9k	24.8k	20.3k	14.6k	8.6k	3.8k	1.2k	0.2k	0.1k	0.0k	0.0k	0.0k	0.0k	0.0k	0.0k
100%	99%	96%	92%	86%	79%	70%	57%	41%	24%	11%	3%	1%	0%	0%	0%	0%	0%	0%	0%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
35.4k	35.0k	34.0k	32.6k	30.6k	27.9k	24.8k	20.3k	14.6k	8.6k	3.8k	1.2k	0.2k	0.1k	0.0k	0.0k	0.0k	0.0k	0.0k	0.0k
100%	99%	96%	92%	86%	79%	70%	57%	41%	24%	11%	3%	1%	0%	0%	0%	0%	0%	0%	0%

Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
35.4k	35.0k	34.0k	32.6k	30.6k	27.9k	24.8k	20.3k	14.6k	8.6k	3.8k	1.2k	0.2k	0.1k	0.0k	0.0k	0.0k	0.0k	0.0k	0.0k
100%	99%	96%	92%	86%	79%	70%	57%	41%	24%	11%	3%	1%	0%	0%	0%	0%	0%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
15°	**20.1°**	**22.5°**	**88.3%**	**86.1%**

Flicker

Flicker curve (complete sampled flicker signal)

Flicker frame (frame of one flicker period)

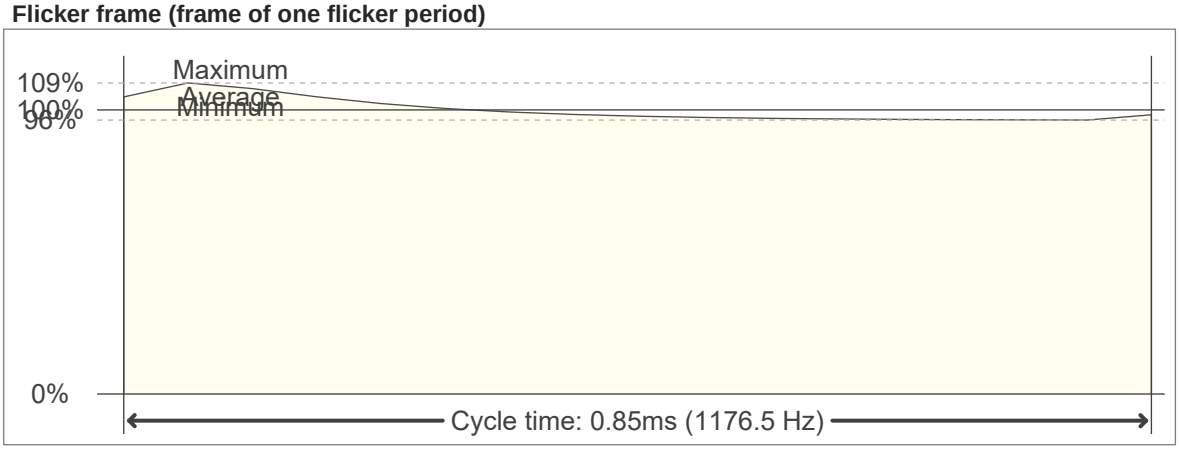

Flicker FFT (frequency scope of flicker curve)

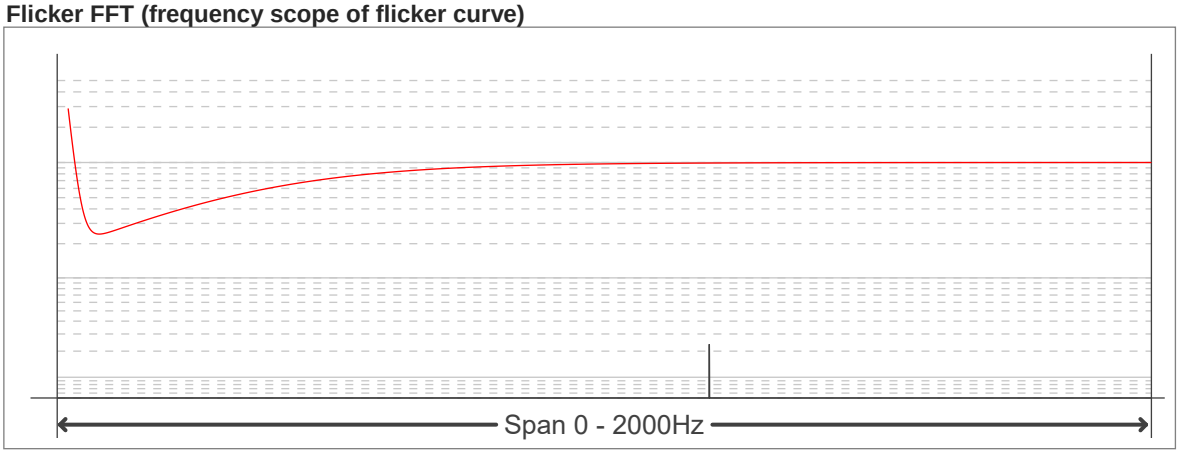

Flicker results:

Flicker frequency:		1176.47 Hz	
Flicker index:	0.02	JA8/10 40Hz	0.15 %
Flicker percentage:	7.04 %	JA8/10 90Hz	0.17 %
SVM: (Visual flicker)	0.05	JA8/10 200Hz	0.18 %
PstLM	0	JA8/10 400Hz	0.19 %
Mp	0.09	JA8/10 1000Hz	0.79 %

Flicker conditions:

Sample rate:	20000 samples/second