Light efficiency:

20 Lumen/Watt

Light quality:

CRI: 0.0

Color temperature:

0 K

Output: 4313 lm
Peak: 566993 cd

Power: 211.8 W
PF: 1.0

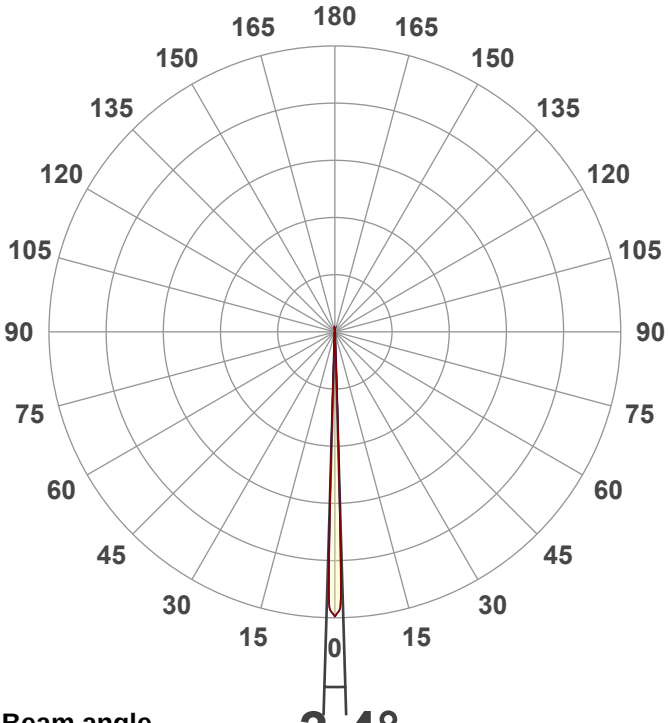

Beam angle 3.4°

Product name:
Vizi Xtreme (Full On,Zoom Narrow)

Item number:

Date and time:
8/26/2026 2:46:32 PM

CIE 1931
x: 0.255
y: 0.222

Spectra

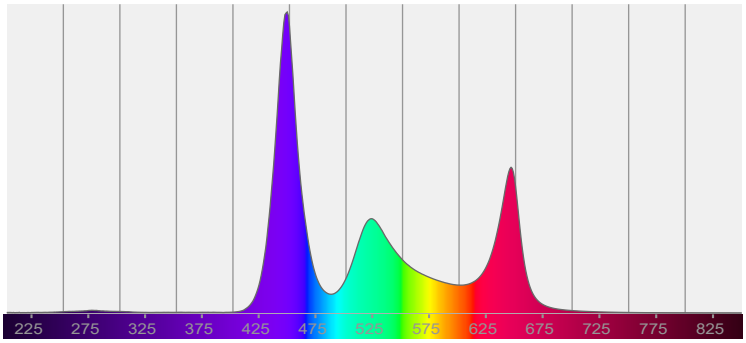

Power

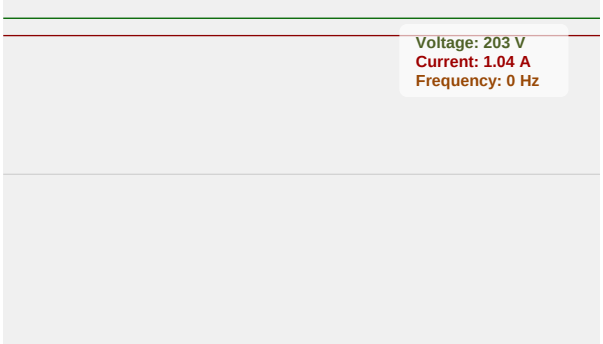

Color details

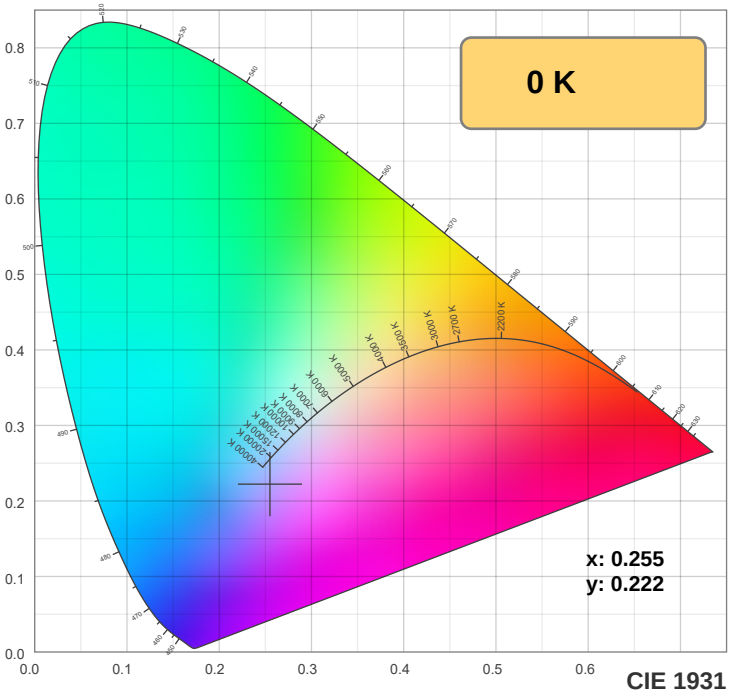

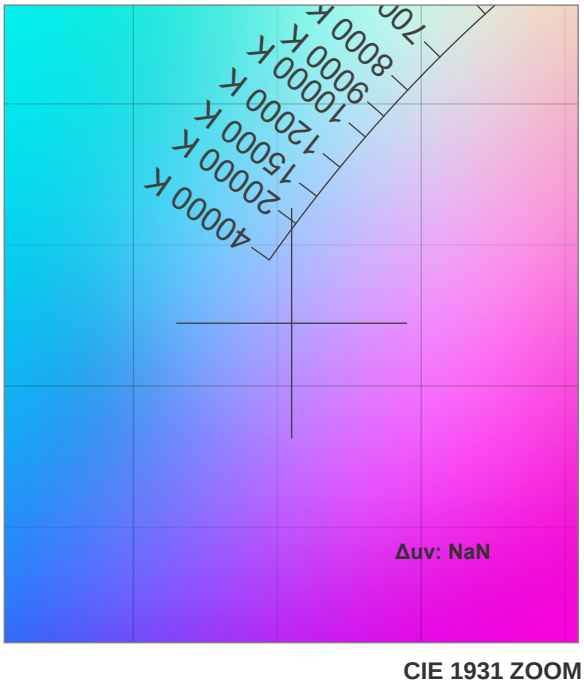

TM-30: 0.0

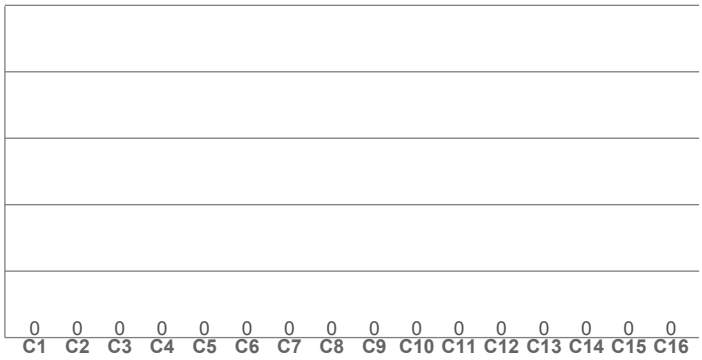

CRI: 0.0 (R1-R8)

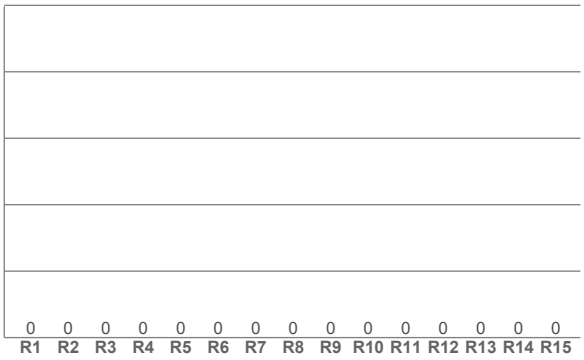

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS: 0.0

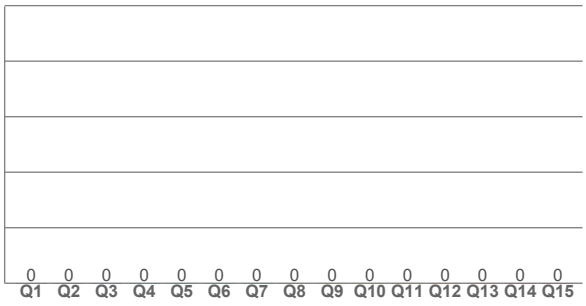

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.255	0.222	0.198	0.259	NaN

TM-30 details

Rf 0.0

Fidelity index Rf

Rg 0.0

Gamut index Rg

		Shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

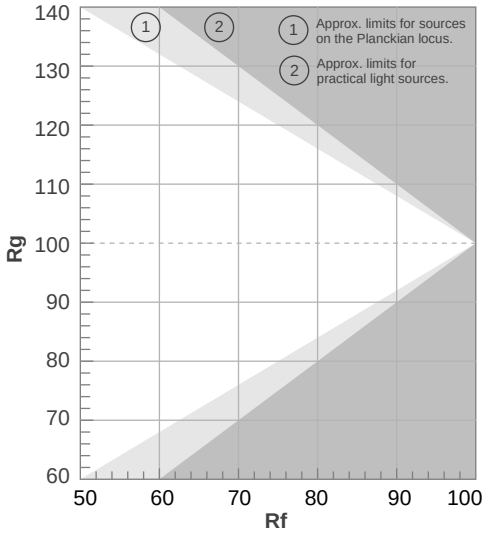

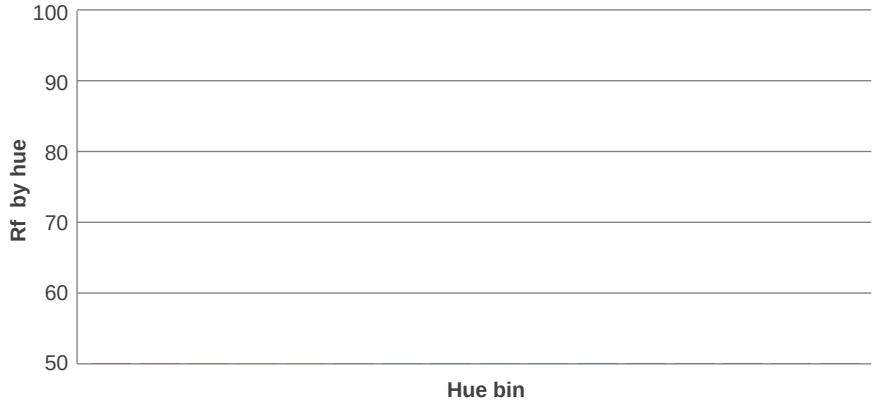

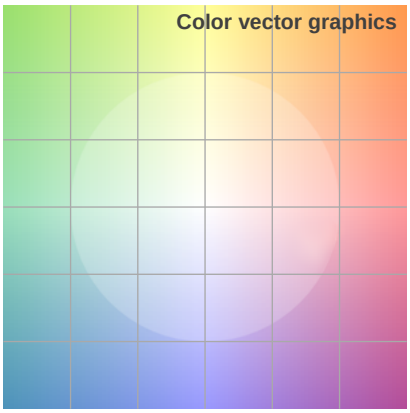

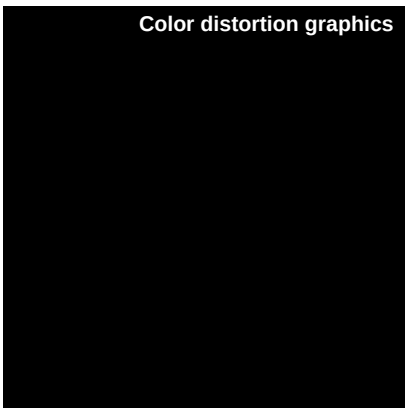

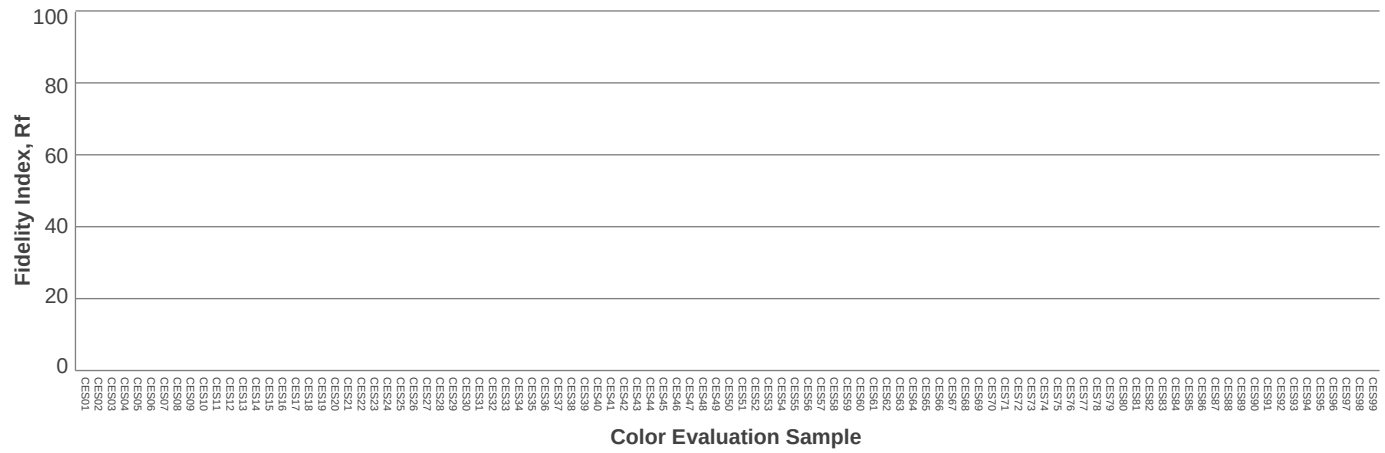

Beam details

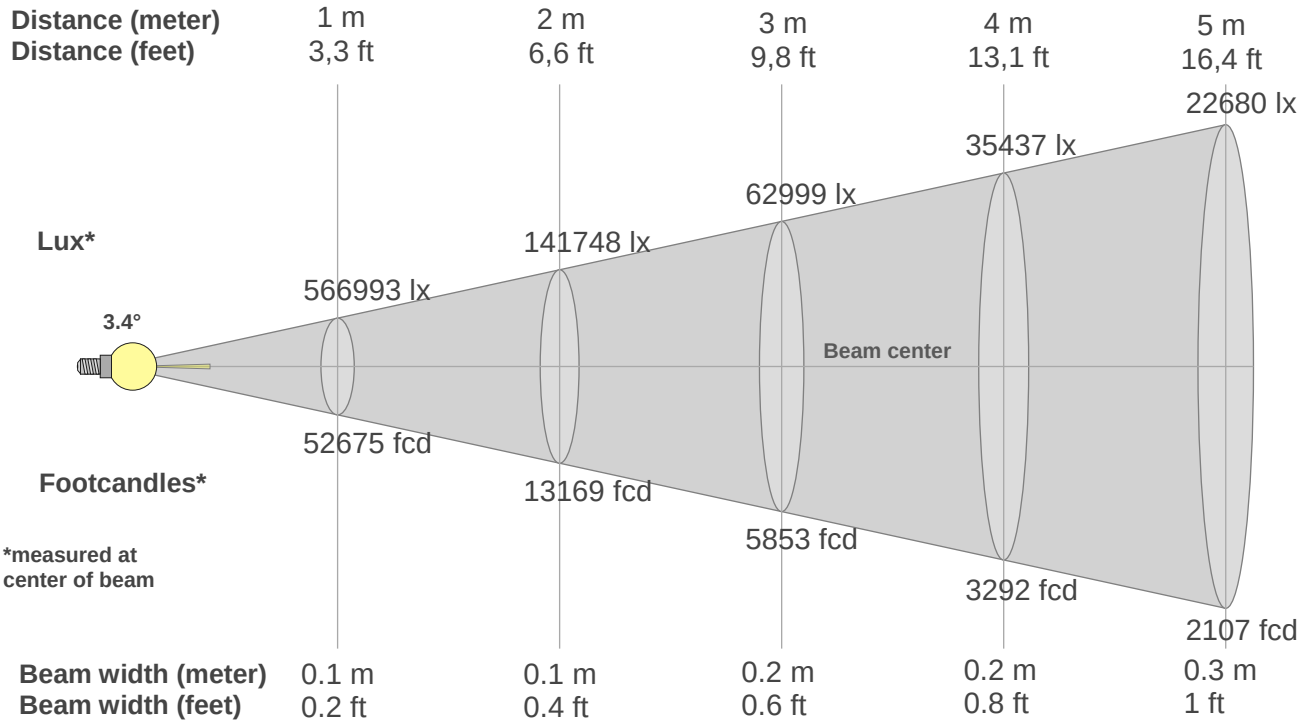

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
566993l	141748l	62999lx	35437lx	22680lx	15750lx	11571lx	8859lx	7000lx	5670lx	4686lx	3937lx	3355lx	2893lx	2520lx	2215lx	1962lx	1750lx	1571lx	1417lx
52675.4	13168.8	5852.8f	3292.2f	2107fcd	1463.2f	1075fcd	823.1fc	650.3fc	526.8fc	435.3fc	365.8fc	311.7fc	268.8fc	234.1fc	205.8fc	182.3fc	162.6fc	145.9fc	131.7fc

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
567k	554k	103k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k
100%	98%	18%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
567k	554k	103k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k
100%	98%	18%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
567k	554k	103k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k
100%	98%	18%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
567k	554k	103k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k
100%	98%	18%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
3.4°	**4.2°**	**4.6°**	**53.1%**	**46.7%**

Flicker

Flicker curve (complete sampled flicker signal)

Flicker frame (frame of one flicker period)

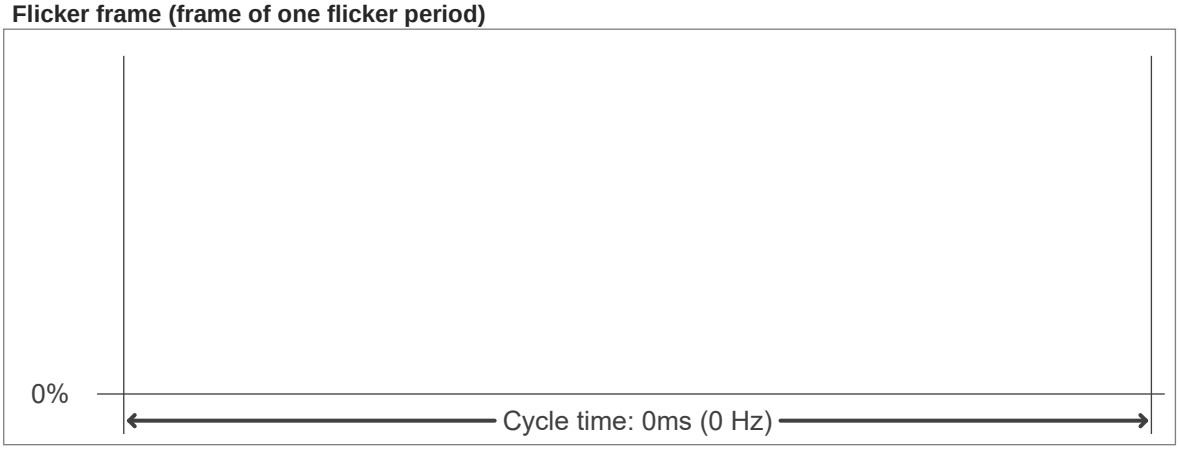

Flicker FFT (frequency scope of flicker curve)

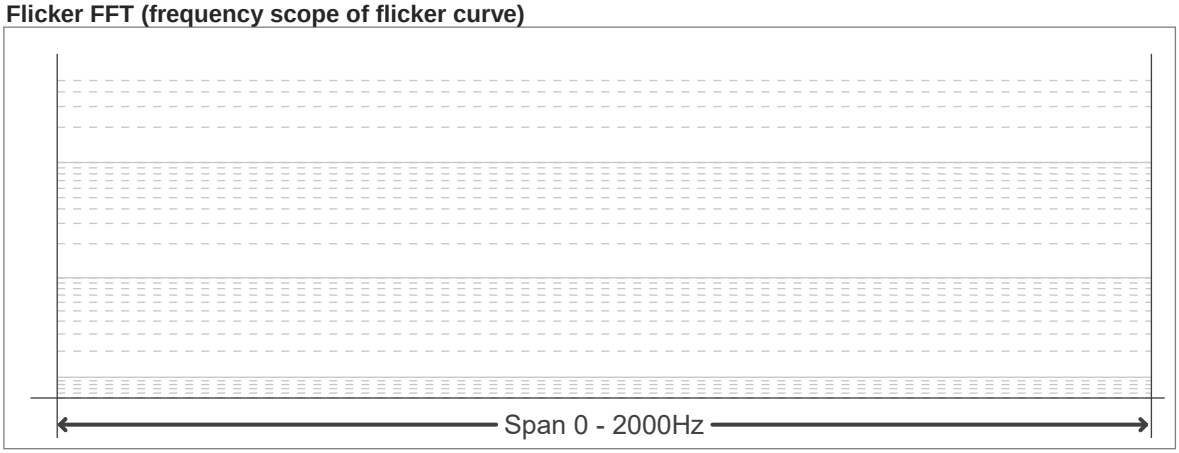

Flicker results:

Flicker frequency:		n/a Hz	
Flicker index:	n/a	JA8/10 40Hz	n/a %
Flicker percentage:	n/a %	JA8/10 90Hz	n/a %
SVM: (Visual flicker)	n/a	JA8/10 200Hz	n/a %
PstLM	n/a	JA8/10 400Hz	n/a %
Mp	n/a	JA8/10 1000Hz	n/a %

Flicker conditions:

Sample rate:	n/a samples/second