Light efficiency:

19 Lumen/Watt

Light quality:

CRI: 0.0

Color temperature:

0 K

Output: 1644 lm
Peak: 207301 cd

Power: 85.7 W
PF: 1.0

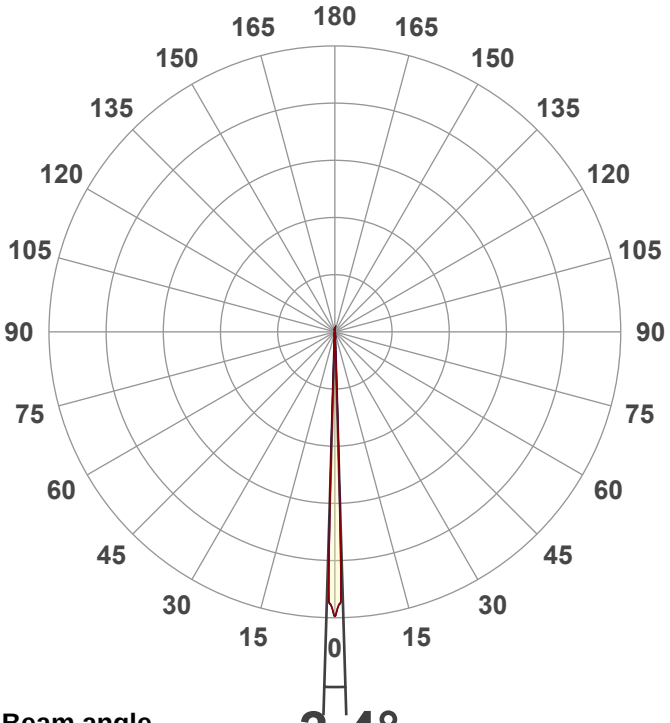

Beam angle 3.4°

Product name:
Vizi Xtreme (Zoom Narrow,Green)

Item number:

Date and time:
8/27/2026 10:39:11 AM

CIE 1931
x: 0.159
y: 0.714

Spectra

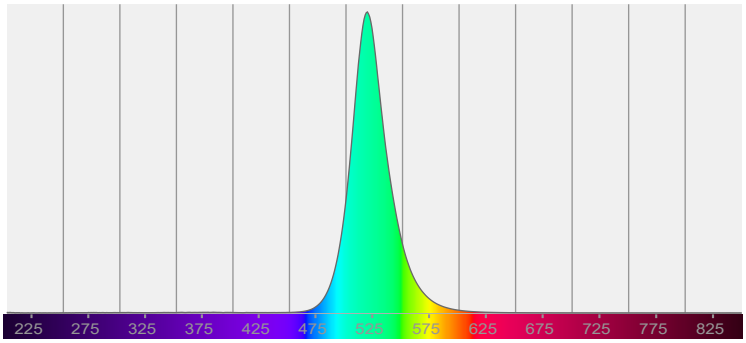

Power

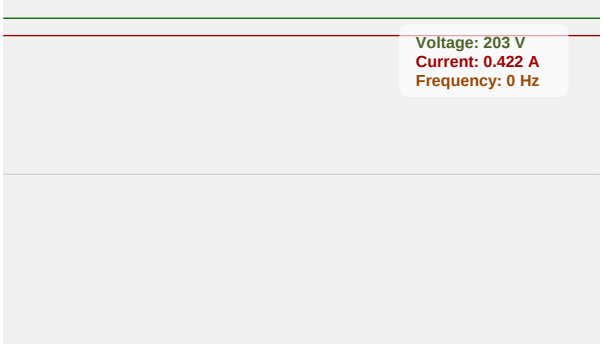

Color details

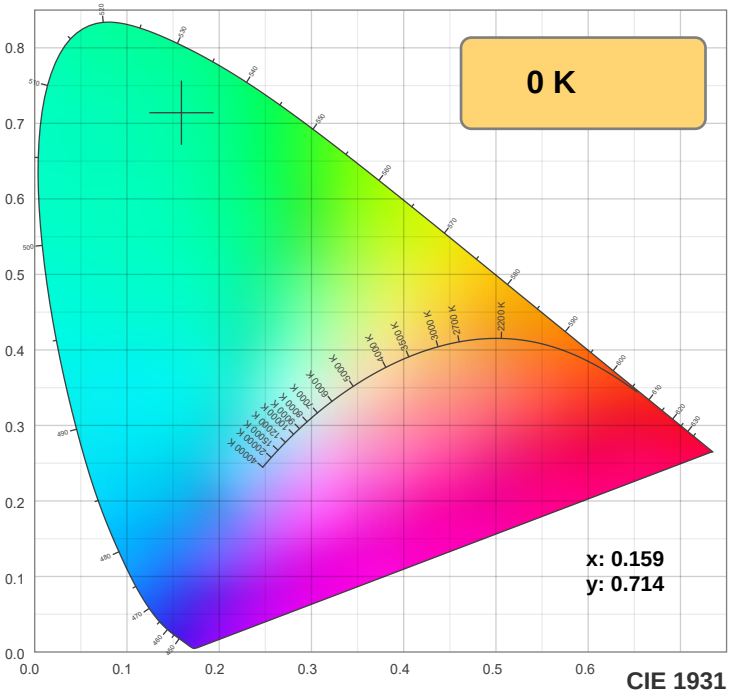

CIE 1931

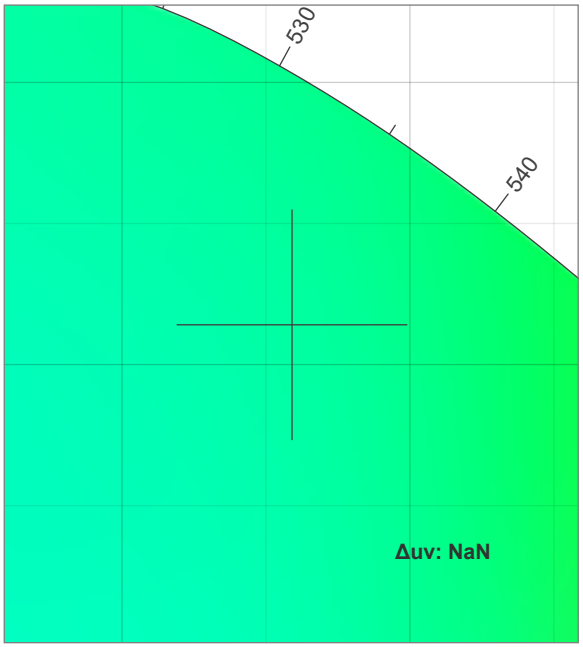

CIE 1931 ZOOM

TM-30: 0.0

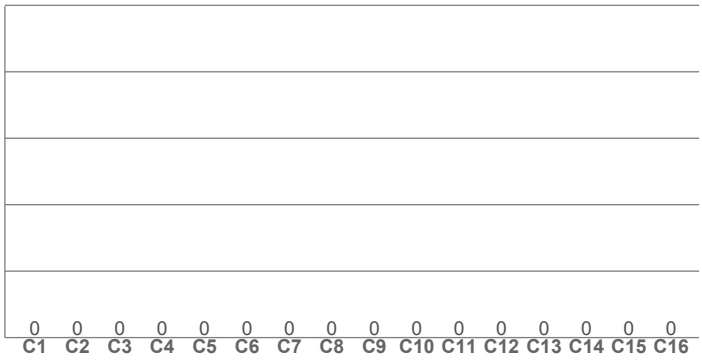

CRI: 0.0 (R1-R8)

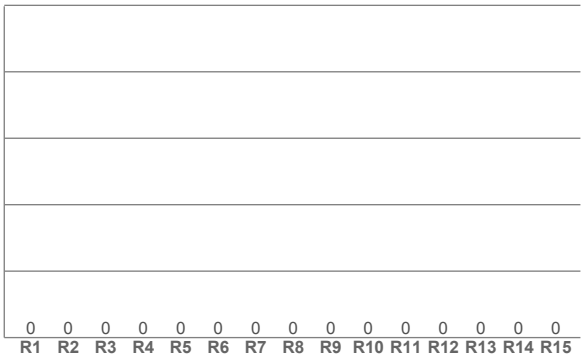

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS: 0.0

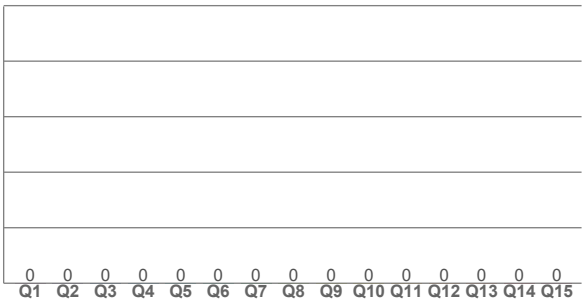

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.159	0.714	0.057	0.381	NaN

TM-30 details

Rf 0.0

Fidelity index Rf

Rg 0.0

Gamut index Rg

		Shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

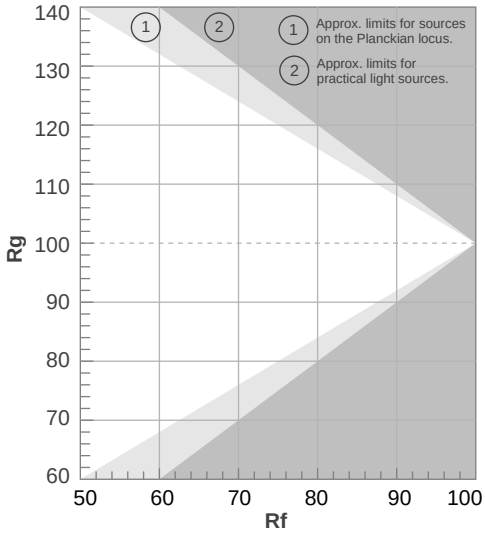

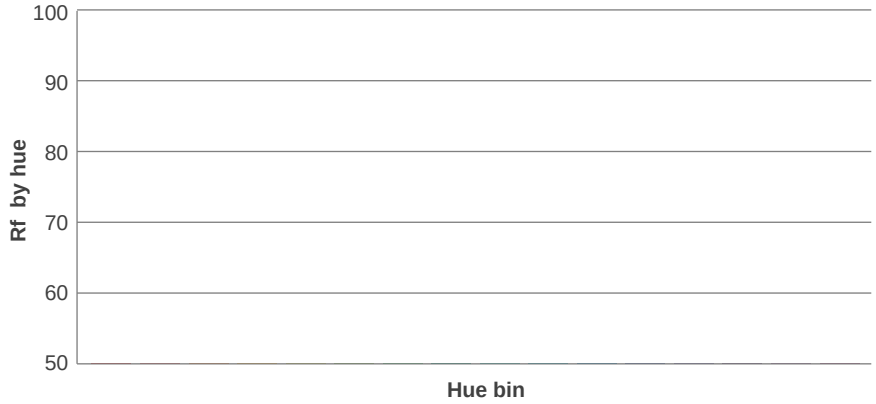

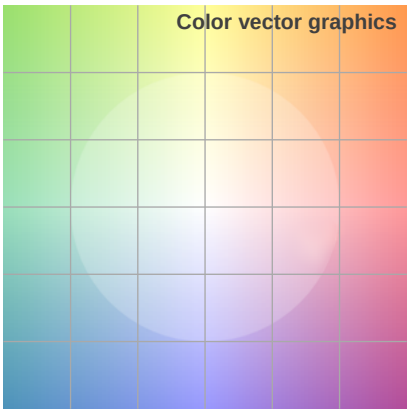

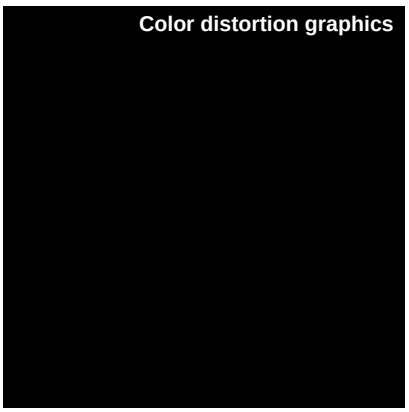

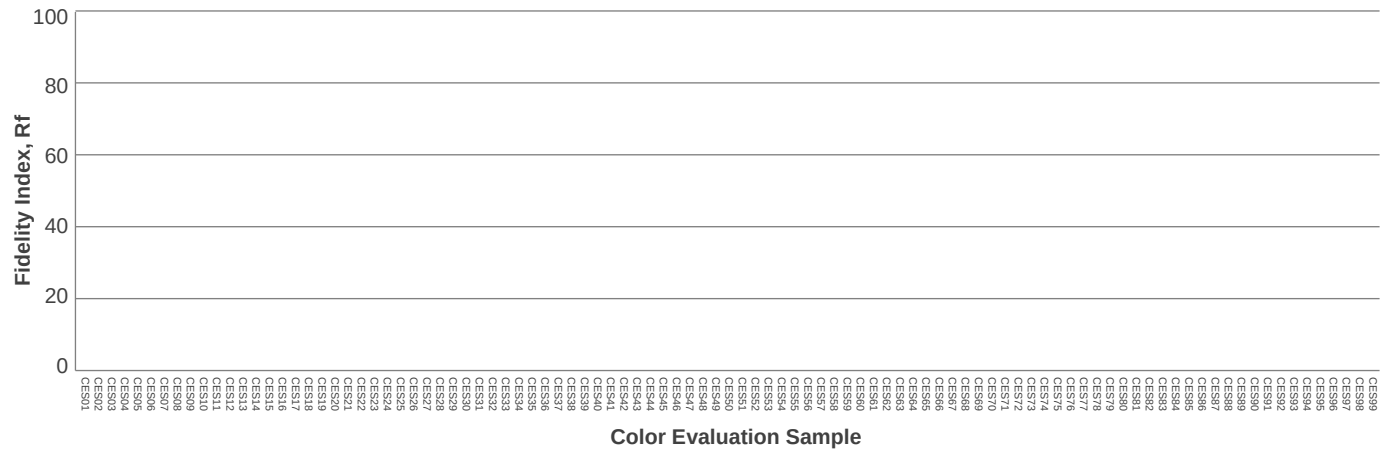

Beam details

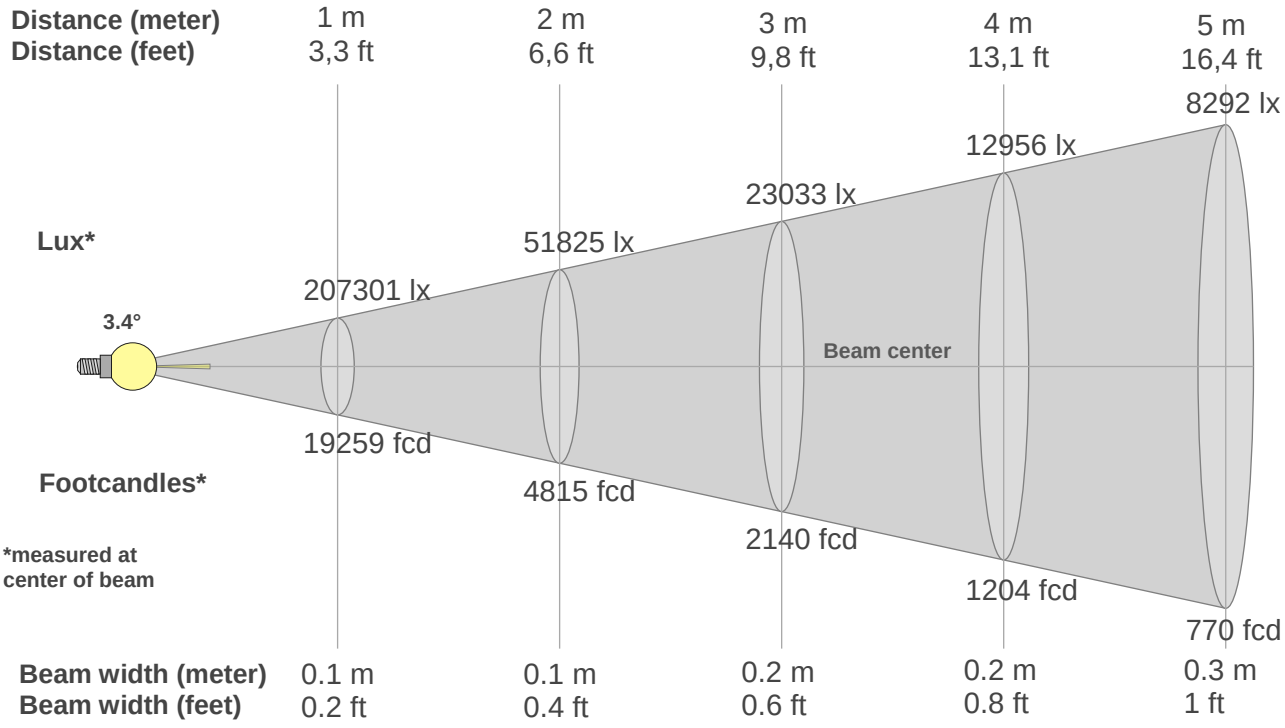

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
207301lx	51825lx	23033lx	12956lx	8292lx	5758lx	4231lx	3239lx	2559lx	2073lx	1713lx	1440lx	1227lx	1058lx	921lx	810lx	717lx	640lx	574lx	518lx
19258.9fcd	4814.7fcd	2139.9fcd	1203.7fcd	770.4fcd	535fcd	393fcd	300.9fcd	237.8fcd	192.6fcd	159.2fcd	133.7fcd	114fcd	98.3fcd	85.6fcd	75.2fcd	66.6fcd	59.4fcd	53.3fcd	48.1fcd

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
207k	198k	32k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k
100%	96%	15%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
207k	198k	32k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k
100%	96%	15%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
207k	198k	32k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k
100%	96%	15%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
207k	198k	32k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k	0k
100%	96%	15%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
3.4°	4.1°	4.5°	51.9%	45.1%

Flicker

Flicker curve (complete sampled flicker signal)

Flicker frame (frame of one flicker period)

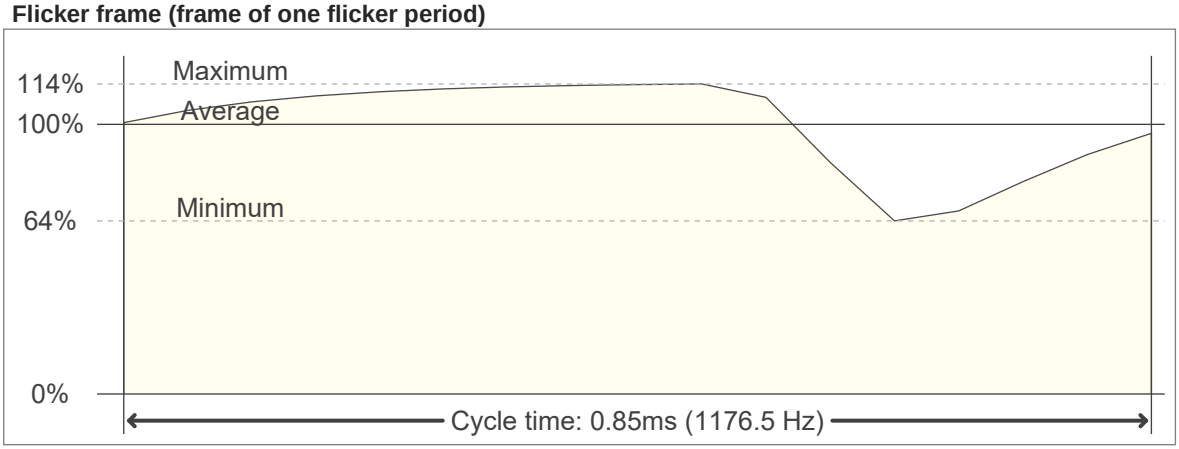

Flicker FFT (frequency scope of flicker curve)

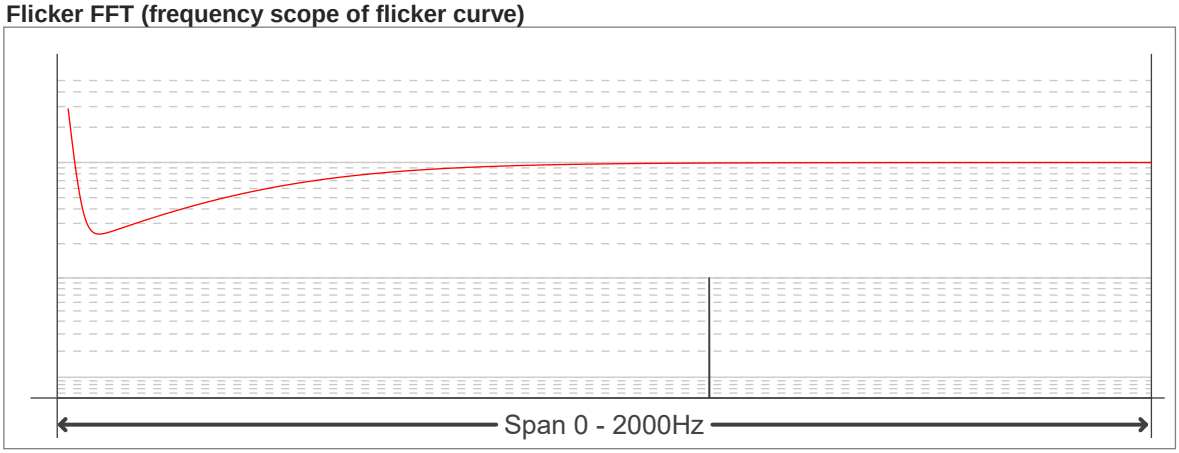

Flicker results:

Flicker frequency:		1176.47 Hz	
Flicker index:	0.07	JA8/10 40Hz	0.44 %
Flicker percentage:	29.54 %	JA8/10 90Hz	0.75 %
SVM: (Visual flicker)	0.2	JA8/10 200Hz	1.46 %
PstLM	0	JA8/10 400Hz	2.89 %
Mp	0.22	JA8/10 1000Hz	7.92 %

Flicker conditions:

Sample rate:	20000 samples/second