



Light efficiency:


26 Lumen/Watt

Light quality:

CRI: 0.0

Color temperature:

0 K

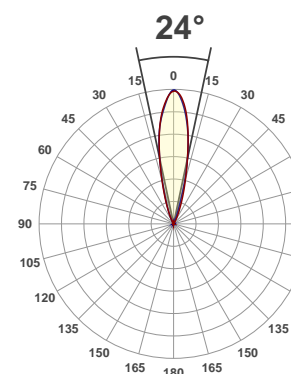

Product name:

Ultra Hex Bar 12

Test:


w Blinder Full On

Date:


5/31/2017

Output: 2238 lm Power consumption: 85.1 W Peak: 11155 cd


Spectral distribution

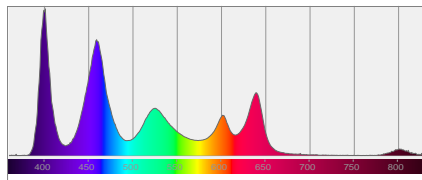


Color coordinates



Zoom color point




CRI R values

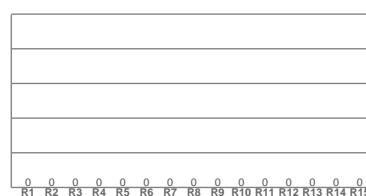

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.278	0.251	0.204	0.276	n/a

## Beam details

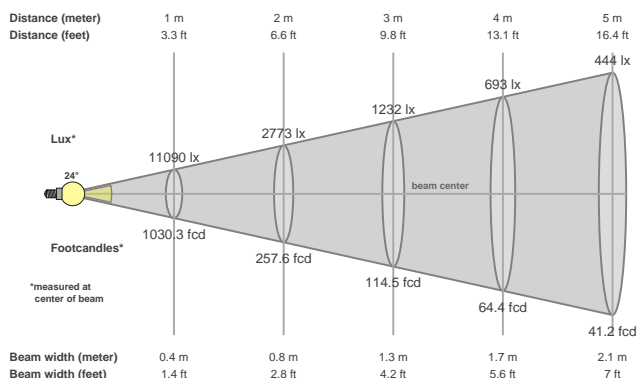

## Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
24°	42.8°	54.6°

## Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
11155 cd	1.0%	1.0%

## Power

Power	Power factor	Power frequency
85.1 W	0.64	60 Hz

Nominal voltage	Voltage	Current
230 V	115 V	1.15 A

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
11090lx	2773lx	1232lx	693lx	444lx	308lx	226lx	173lx	137lx	111lx	92lx	77lx	66lx	57lx	49lx	43lx	38lx	34lx	31lx	28lx
1030.3fcd	257.6fcd	114.5fcd	64.4fcd	41.2fcd	28.6fcd	21fcd	16.1fcd	12.7fcd	10.3fcd	8.5fcd	7.2fcd	6.1fcd	5.3fcd	4.6fcd	4fcd	3.6fcd	3.2fcd	2.9fcd	2.6fcd