



Light efficiency:

13 Lumen/Watt


Light quality:

CRI: 0.0

Color temperature:

0 K

11.4°



Product name:

Encore Profile 1000 Color

Test:


Zoom In Green

Date:


4/27/2017

Output: 522 lm Power consumption: 39.4 W Peak: 16718 cd


Spectral distribution

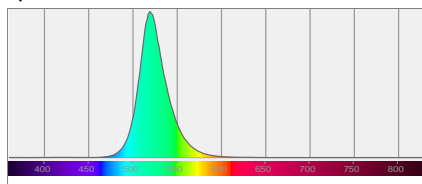


Color coordinates



Zoom color point




CRI R values

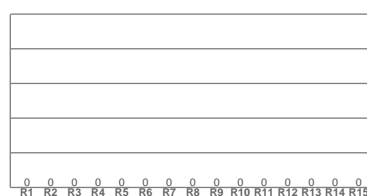

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color divition from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.163	0.732	0.057	0.383	n/a

Beam details

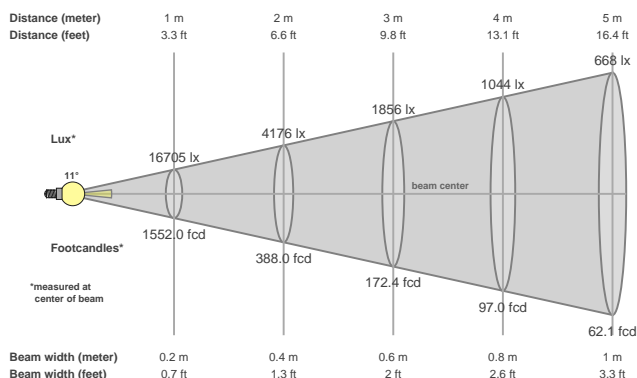

Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
11.4°	12.6°	12.9°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
16718 cd	1.0%	1.0%

Power

Power	Power factor	Power frequency
39.4 W	0.52	60 Hz

Nominal voltage	Voltage	Current
230 V	115 V	0.664 A

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
16705lx	4176lx	1856lx	1044lx	668lx	464lx	341lx	261lx	206lx	167lx	138lx	116lx	99lx	85lx	74lx	65lx	58lx	52lx	46lx	42lx
1552fcd	388fcd	172.4fcd	97fcd	62.1fcd	43.1fcd	31.7fcd	24.2fcd	19.2fcd	15.5fcd	12.8fcd	10.8fcd	9.2fcd	7.9fcd	6.9fcd	6.1fcd	5.4fcd	4.8fcd	4.3fcd	3.9fcd