



Light efficiency:


24 Lumen/Watt

Light quality:

CRI: 0.0

Color temperature:

0 K

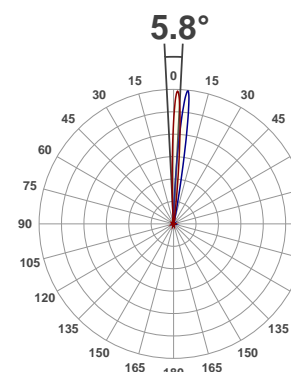

Product name:

7PZ IP

Test:


Zoom In Red

Date:


4/21/2017

Output: 931 lm Power consumption: 38.2 W Peak: 27044 cd


Spectral distribution

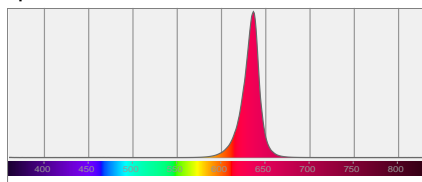

Color coordinates



Zoom color point




CRI R values



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color divition from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.698	0.300	0.537	0.346	n/a

Beam details

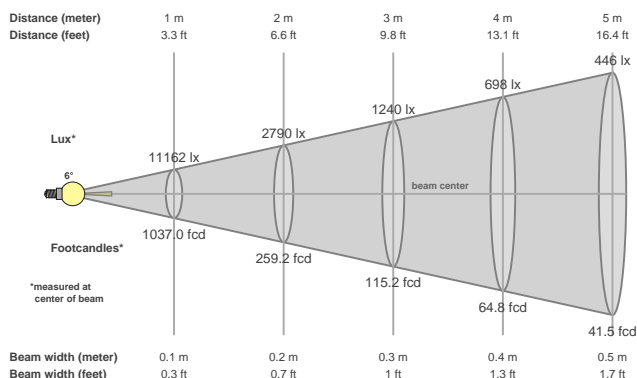

Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
5.8°	10.8°	15°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
27044 cd	0.9%	0.8%

Power

Power	Power factor	Power frequency
38.2 W	0.97	60 Hz

Nominal voltage	Voltage	Current
230 V	117 V	0.337 A

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
11162lx	2790lx	1240lx	698lx	446lx	310lx	228lx	174lx	138lx	112lx	92lx	78lx	66lx	57lx	50lx	44lx	39lx	34lx	31lx	28lx
1037fcd	259.2fcd	115.2fcd	64.8fcd	41.5fcd	28.8fcd	21.2fcd	16.2fcd	12.8fcd	10.4fcd	8.6fcd	7.2fcd	6.1fcd	5.3fcd	4.6fcd	4.1fcd	3.6fcd	3.2fcd	2.9fcd	2.6fcd