

## Connect WIFI NET 2 to a Wireless Network

1. Connect computer with WIFI NET2 via wifi.



2. Open Browser and input 10.10.100.254, which is the address for all WIFI NET2 wifi modules.




3. Default User Name and Password is "admin" for both.



4. Change language to English.



5. Click “WiFi Setting” tab, select “AP+STA mode” for the WiFi Work Mode, then click “Search”.

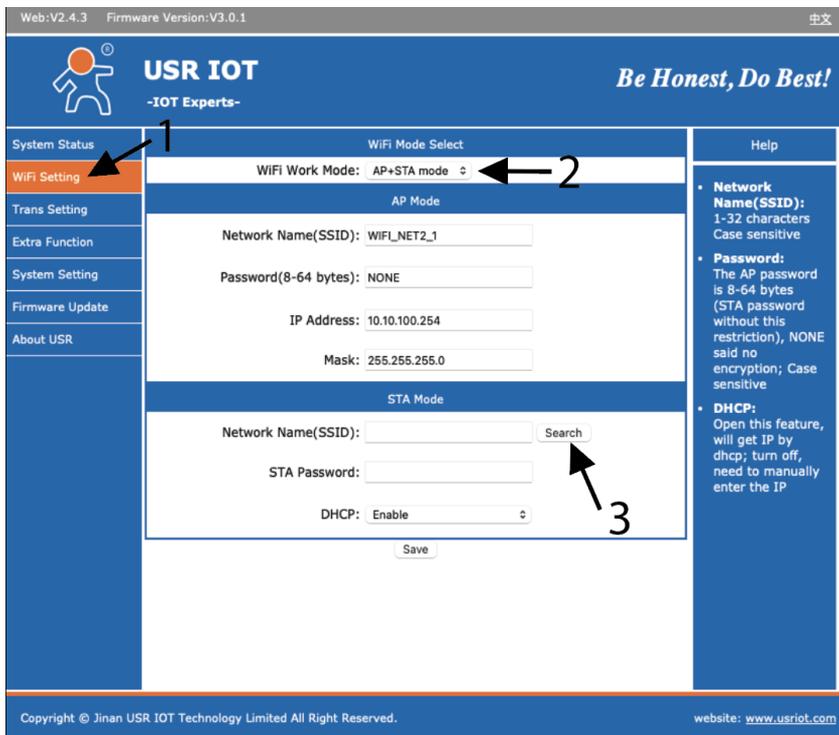

6. Select your WiFi network, then click “OK”.

Web:V2.4.3 Firmware Version:V3.0.1 中文

**USR IOT**  
-IOT Experts-  
*Be Honest, Do Best!*

System Status  
**WiFi Setting**  
Trans Setting  
Extra Function  
System Setting  
Firmware Update  
About USR

Please select a SSID

SSID	BSSID	RSSI	Channel
● Elation Sales	74:83:C2:97:D6:54	-38	11
● ADJ Sales	7A:83:C2:97:D6:54	-38	11
● Purchasing	7E:83:C2:97:D6:54	-38	11
● Elation Management	82:83:C2:97:D6:54	-38	11
● Acclaim2020	86:83:C2:97:D6:54	-38	11
● R&D2020	8A:83:C2:97:D6:54	-38	11
● ADJ4Guest	8E:83:C2:97:D6:54	-38	11
● ADJ-GUEST	FC:34:97:6F:06:88	-40	1
● ADJ Sales	74:83:C2:7B:AD:56	-62	11
● ADJLink22	C4:7F:51:06:9B:5C	-54	4
● AP40021943	5A:71:FC:08:6B:A1	-54	10
● ADJ Sales	7A:83:C2:97:9F:5A	-61	1

OK Refresh

Help

- **Network Name(SSID):**  
1-32 characters  
Case sensitive
- **Password:**  
The AP password is 8-64 bytes (STA password without this restriction), NONE said no encryption; Case sensitive
- **DHCP:**  
Open this feature, will get IP by dhcp; turn off, need to manually enter the IP

Copyright © Jinan USR IOT Technology Limited All Right Reserved. website: www.usriot.com

7. Input WiFi password, then click “Save”.

Web:V2.4.3 Firmware Version:V3.0.1 中文

**USR IOT**  
-IOT Experts-  
*Be Honest, Do Best!*

System Status  
**WiFi Setting**  
Trans Setting  
Extra Function  
System Setting  
Firmware Update  
About USR

WiFi Mode Select

WiFi Work Mode: AP+STA mode

AP Mode

Network Name(SSID): WIFL\_NET2\_1

Password(8-64 bytes): NONE

IP Address: 10.10.100.254

Mask: 255.255.255.0

STA Mode

Network Name(SSID): ADJ-GUEST Search

STA Password: lightingTheFuture2024

DHCP: Enable


Save

Help

- **Network Name(SSID):**  
1-32 characters  
Case sensitive
- **Password:**  
The AP password is 8-64 bytes (STA password without this restriction), NONE said no encryption; Case sensitive
- **DHCP:**  
Open this feature, will get IP by dhcp; turn off, need to manually enter the IP

Copyright © Jinan USR IOT Technology Limited All Right Reserved. website: www.usriot.com

8. Click “Restart” and wait a few seconds for the reboot to complete.

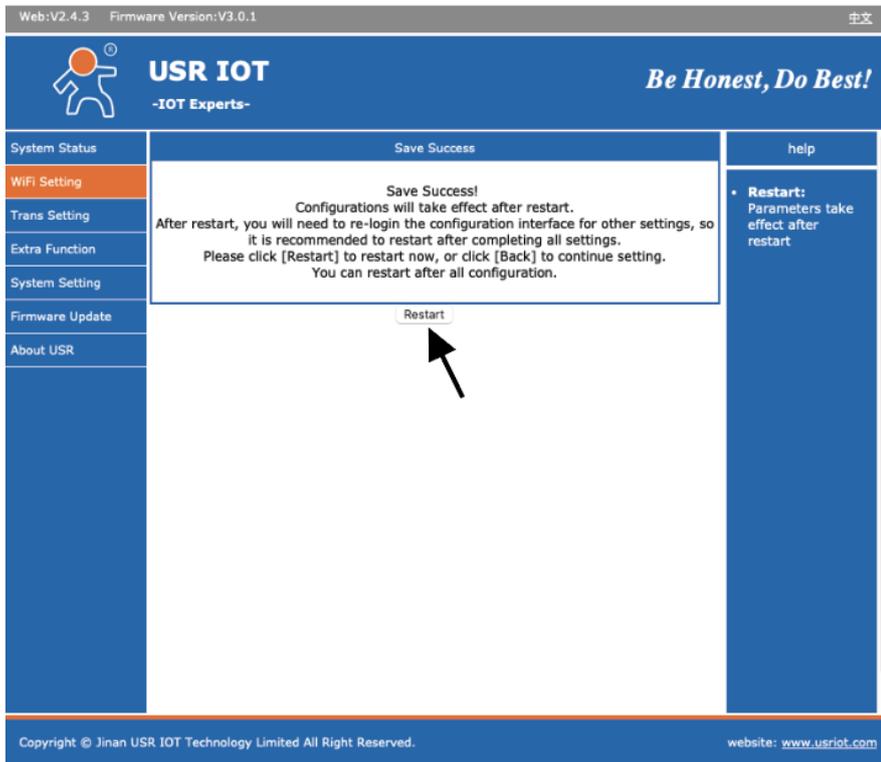


9. After 30 seconds or so, click “System status”. Note STA IP address as you will enter this IP Address in the control App that you use.




STA IP.


10. On your iPad or tablet, connect it to the same WiFi network as you did the WIFI NET 2.

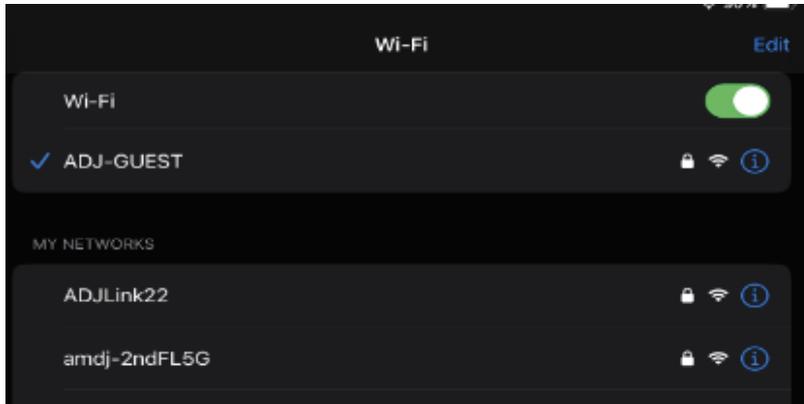

11. In the universe setting of your control App, select the output port that you'd like to control. Here's an example using our Airstream Pro App.

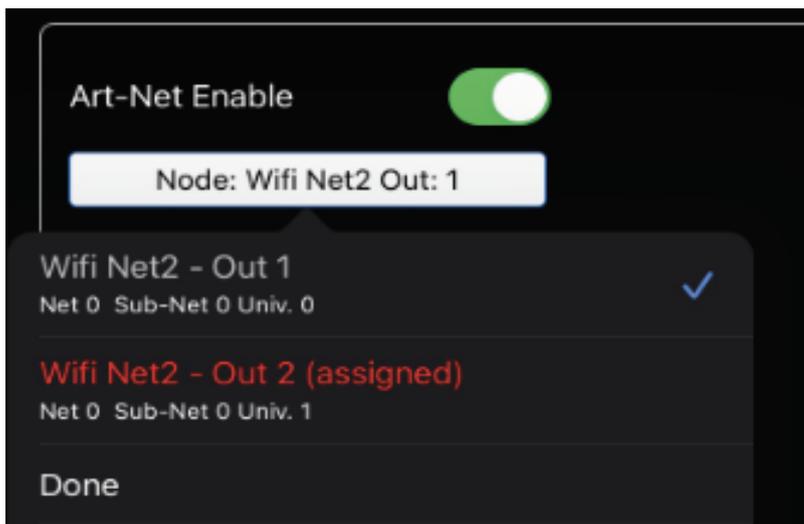

12. Select “static” and input the STA IP (static address), that you noted in the System Status tab on step 9 of these instructions.

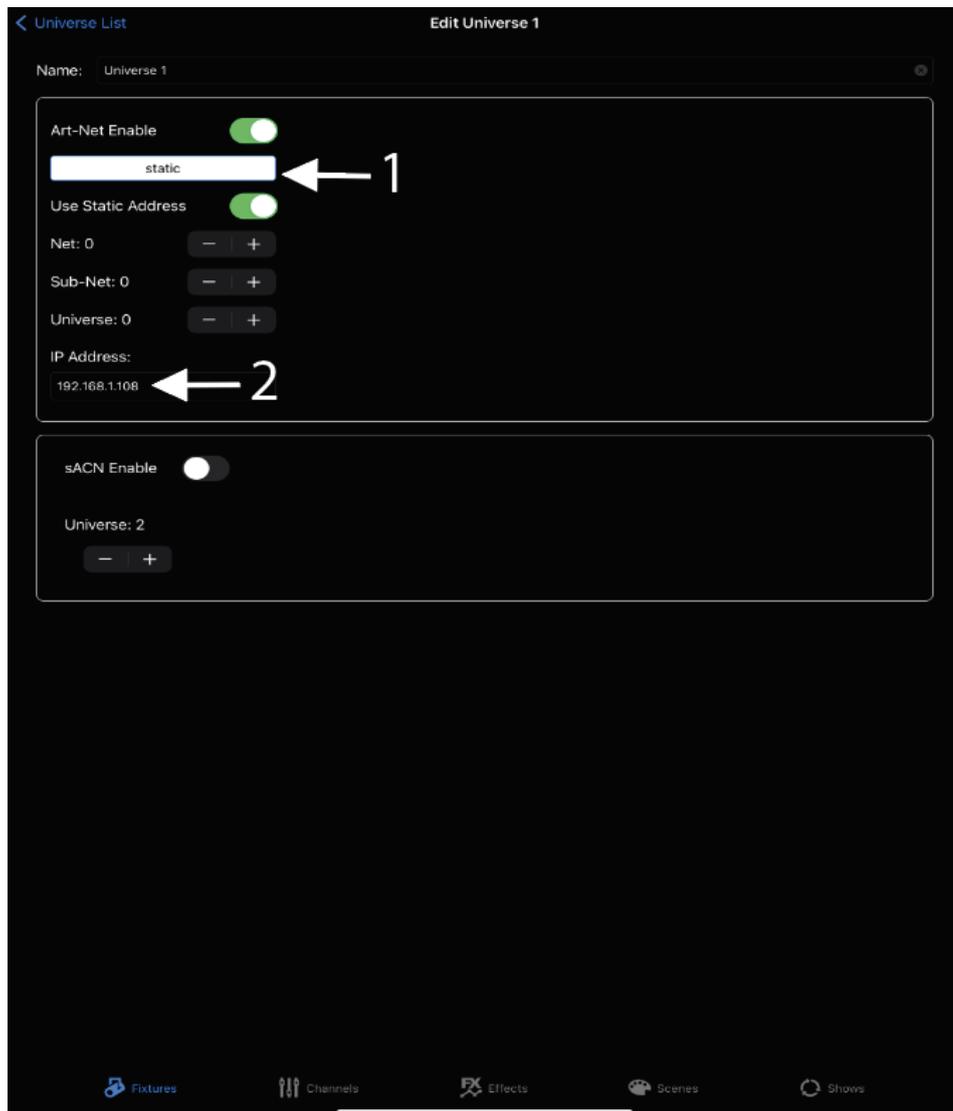

13. After completing steps 1-12, you should now be able to control your WIFI NET 2, via an Artnet App, through a wireless network.