



Light efficiency:


30 Lumen/Watt

Light quality:

CRI: 0.0

Color temperature:

0 K

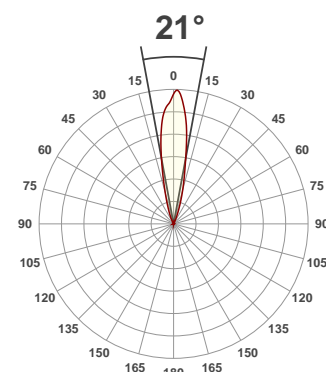

Product name:

Element Hex (Full On)
UNSTABLE


Test:

Element Hex (Full On)


Date:

Output: 1041 lm Power consumption: 34.2 W Peak: 6087 cd


Spectral distribution

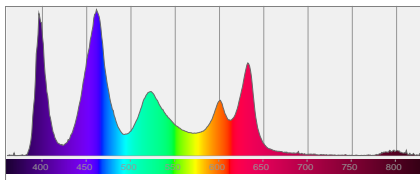

Color coordinates



Zoom color point




CRI R values



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.290	0.263	0.208	0.283	n/a

Beam details

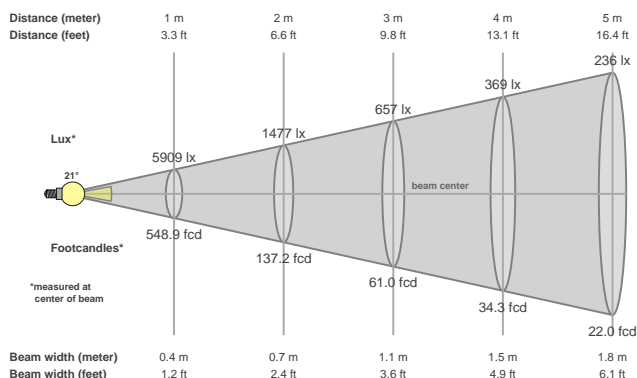

Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
21°	40.4°	52.3°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
6087 cd	1.0%	1.0%

Power

Power	Power factor	Power frequency
34.2 W	0.66	60 Hz

Nominal voltage	Voltage	Current
230 V	116 V	0.447 A

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
5909lx	1477lx	657lx	369lx	236lx	164lx	121lx	92lx	73lx	59lx	49lx	41lx	35lx	30lx	26lx	23lx	20lx	18lx	16lx	15lx
548.9fcd	137.2fcd	61fcd	34.3fcd	22fcd	15.2fcd	11.2fcd	8.6fcd	6.8fcd	5.5fcd	4.5fcd	3.8fcd	3.2fcd	2.8fcd	2.4fcd	2.1fcd	1.9fcd	1.7fcd	1.5fcd	1.4fcd