

Focus Hybrid




Light Efficiency:



Light Quality:



Color Temperature:



Output: 2988 lm

Peak: 1299106 cd


Power: 258.4 W

PF: 0.99



Beam Angle

3.2°

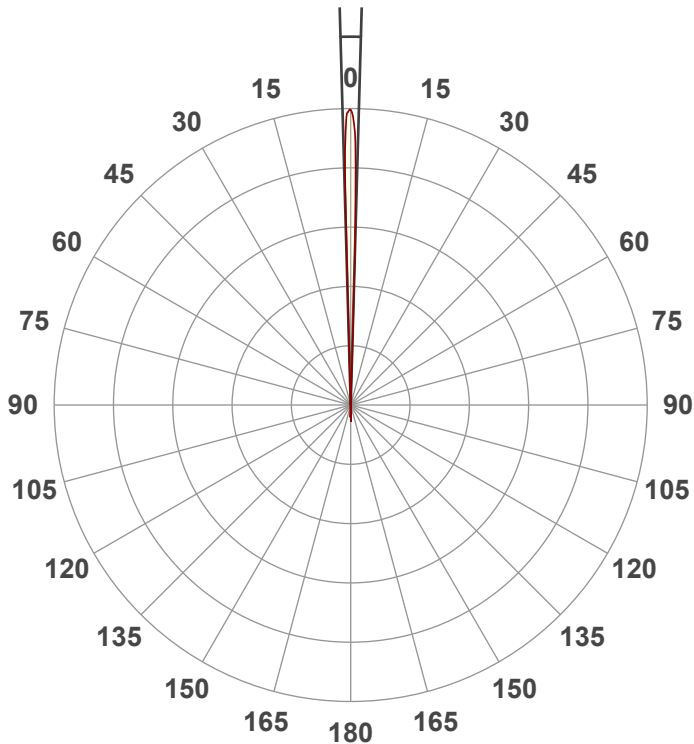


Test:

Zoom In

Date:

2/10/2023


Note:




CIE 1931
x: 0.282
y: 0.281

Spectra



Dominant Wavelength: 467nm

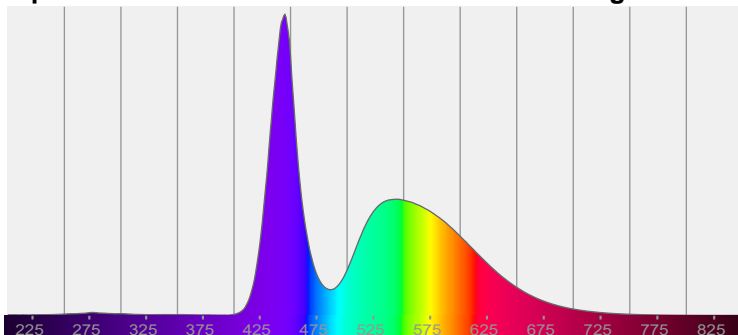


Power

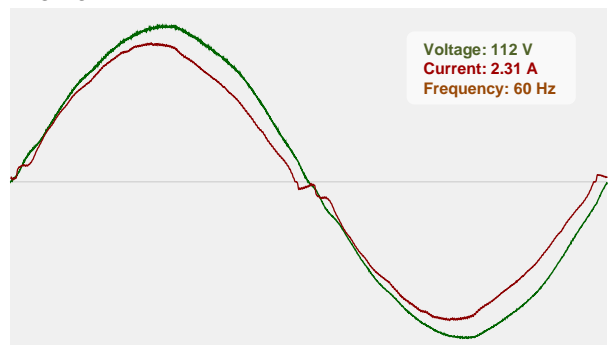


Color Details

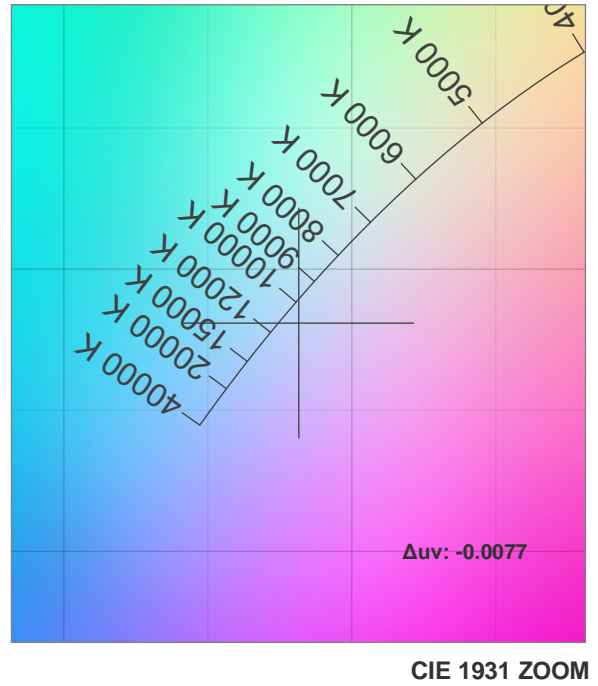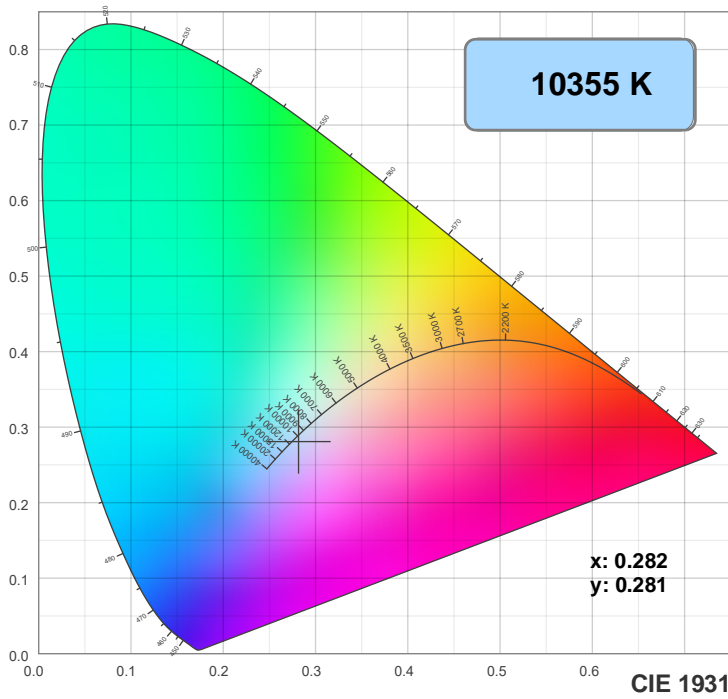

TM30: 67.6

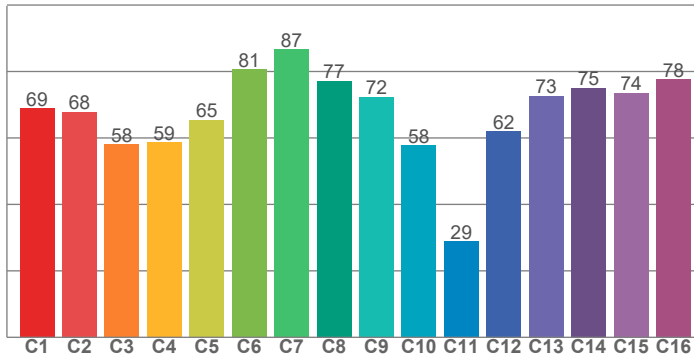

CRI: 70.5 (R1-R8)

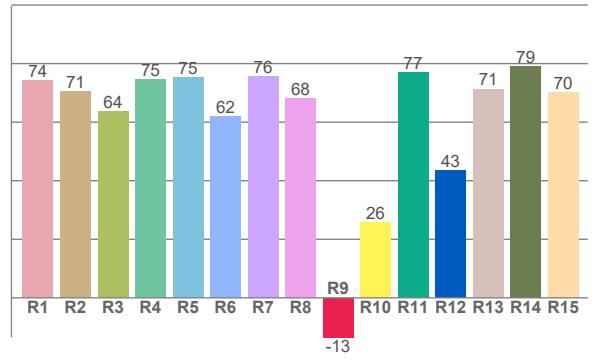

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
74.1	70.7	63.6	74.8	75.4	62.0	75.6	68.2	-13.5	25.9	77.1	43.4	71.4	79.1	70.3


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
68.8	67.8	58.0	58.7	65.4	80.5	86.6	77.2	72.3	57.8	28.8	62.0	72.6	75.1	73.5	77.7

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
85.7	88.5	59.2	49.1	65.9	74.7	80.7	91.1	80.5	62.0	54.5	58.1	65.3	60.4	72.6


CQS: 67.3

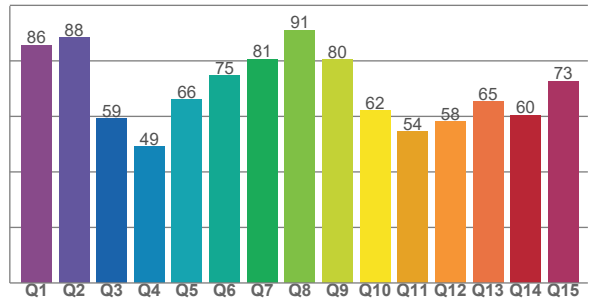

Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
10355 K	70.5	-13.5	67.6	95.4	67.3	0.282	0.281	0.194	0.290	-0.0077

Beam Details

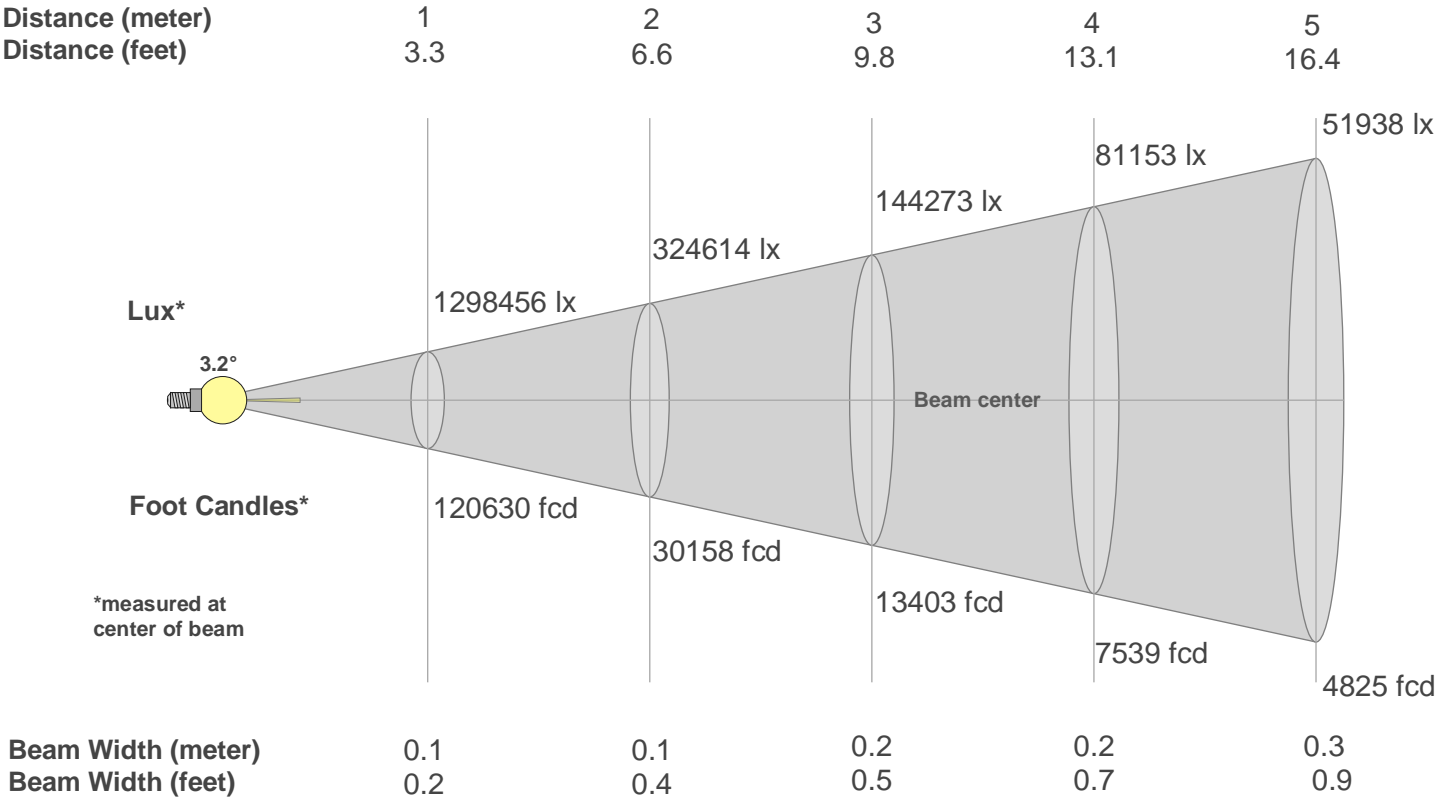

Beam Intensities from 1-20m																				
m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	1298456	324614	144273	81153	51938	36068	26499	20288	16030	12985	10731	9017	7683	6625	5771	5072	4493	4008	3597	3246
fcd	120630.5	30157.6	13403.4	7539.4	4825.2	3350.8	2461.8	1884.9	1489.3	1206.3	996.9	837.7	713.8	615.5	536.1	471.2	417.4	372.3	334.2	301.6

Intensities in 0° C-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
1.3M	1.2M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	93%	1%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 90° C-plane																				
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	
1.3M	1.2M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	
100%	93%	1%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	

Intensities in 180° C-plane																				
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	
1.3M	1.1M	0.1M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	
100%	88%	8%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	

Intensities in 270° C-plane																				
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	
1.3M	1.1M	0.1M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	
100%	88%	8%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
3.2°	3.8°	4°	100.0%	100.0%