

Light efficiency:

56 Lumen/Watt

Light quality:

CRI: 83.4

Color temperature:

9544 K

Output: 11629 lm

Peak: 13512 cd

Power: 208 W

PF: 1.0




Product name:

Hydro Flex L7 (Zoom Out Lime)

Item number:


Date and time:

8/25/2025 1:59:10 PM

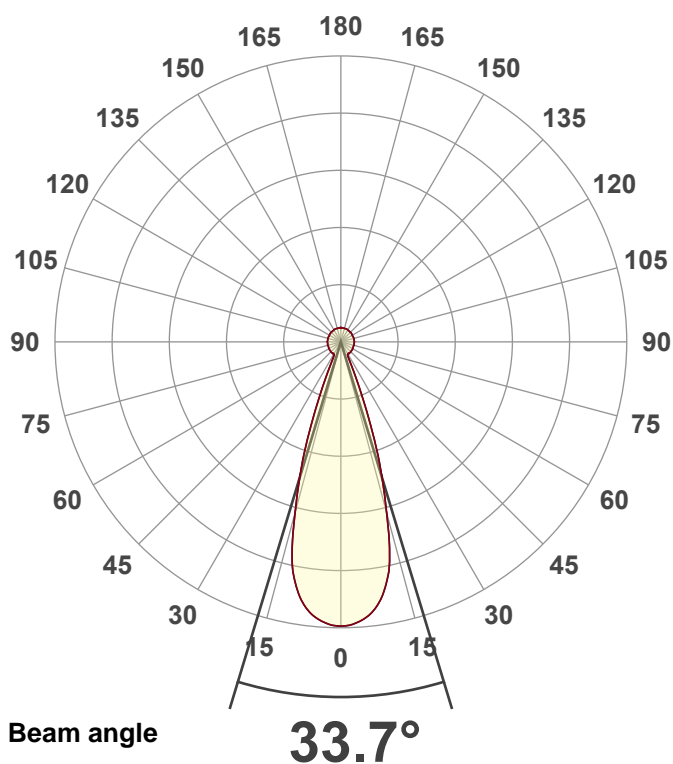

CIE 1931
x: 0.277
y: 0.304



Spectra

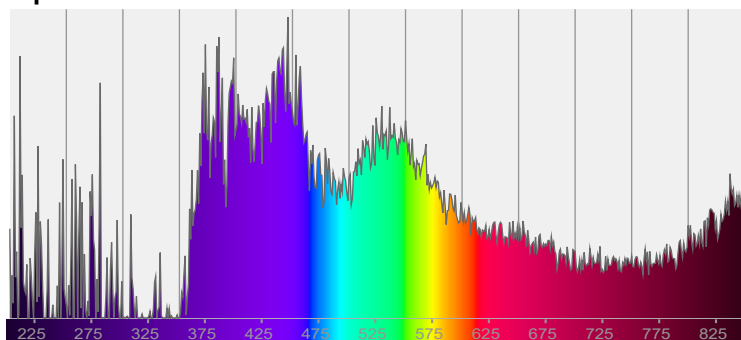


Power

Voltage: 116 V
Current: 1.79 A
Frequency: 0 Hz


Color details

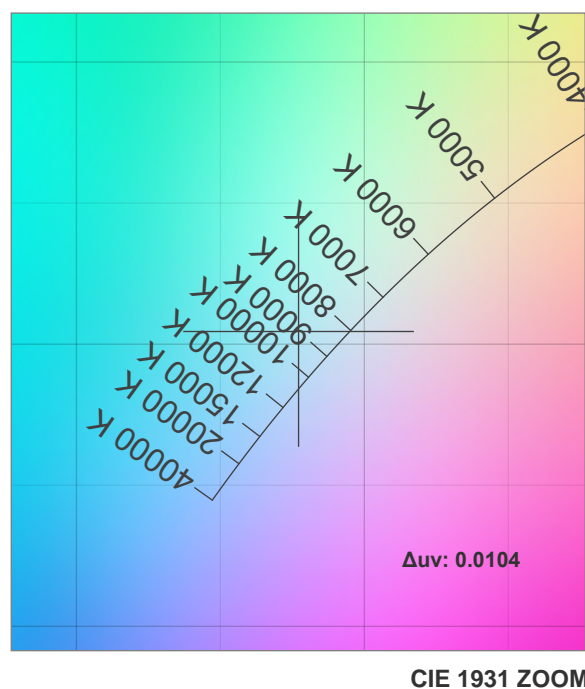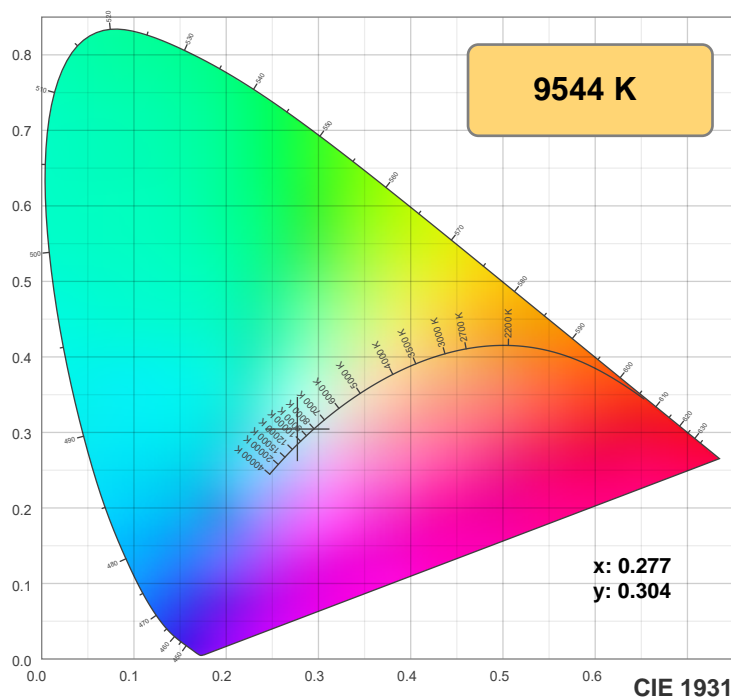

TM-30: 86.5

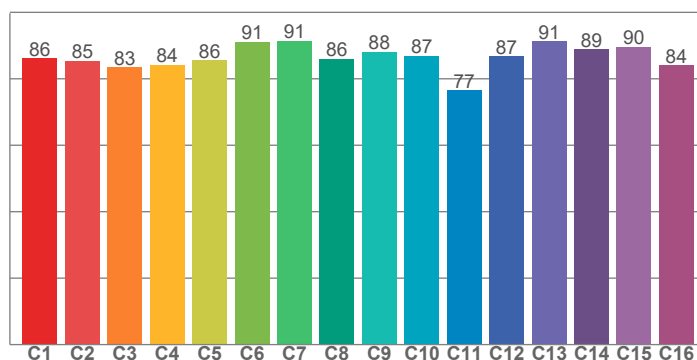

CRI: 83.4 (R1-R8)

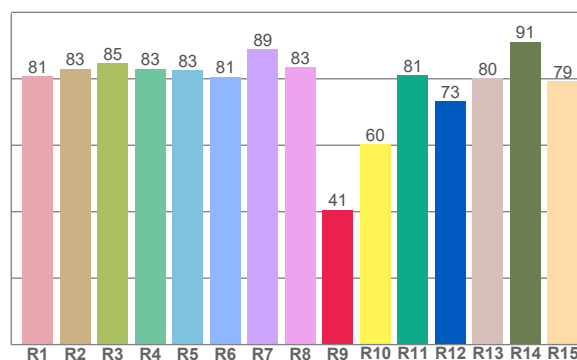

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80.8	83.1	84.7	83.0	82.7	80.7	89.0	83.4	40.6	60.4	81.1	73.3	80.2	91.1	79.3


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
86.2	85.4	83.4	84.2	85.6	91.1	91.4	86.0	88.1	86.9	76.6	86.8	91.2	88.8	89.6	84.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93.4	96.1	86.1	84.0	86.3	85.9	87.1	93.3	93.7	85.2	84.2	86.0	86.7	83.0	87.2

CQS: 87.3

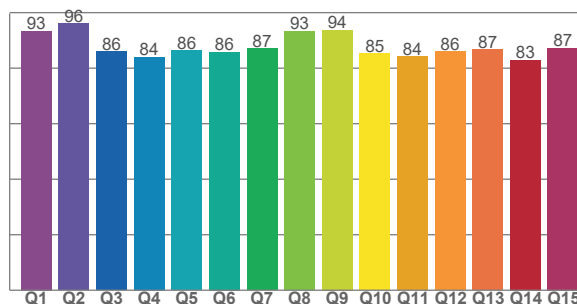

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
9544 K	83.4	40.6	86.5	97.1	87.3	0.277	0.304	0.182	0.300	0.0104

TM-30 details







Rf 86.5

Fidelity index Rf


Rg 97.1

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	86	-7%	-3%
2	85	-7%	2%
3	83	-5%	9%
4	84	1%	10%
5	86	7%	6%
6	91	5%	-2%
7	91	0%	-6%
8	86	-7%	-8%
9	88	-10%	-1%
10	87	-8%	7%
11	77	-4%	11%
12	87	2%	10%
13	91	5%	5%
14	89	5%	-4%
15	90	2%	-8%
16	84	-2%	-8%

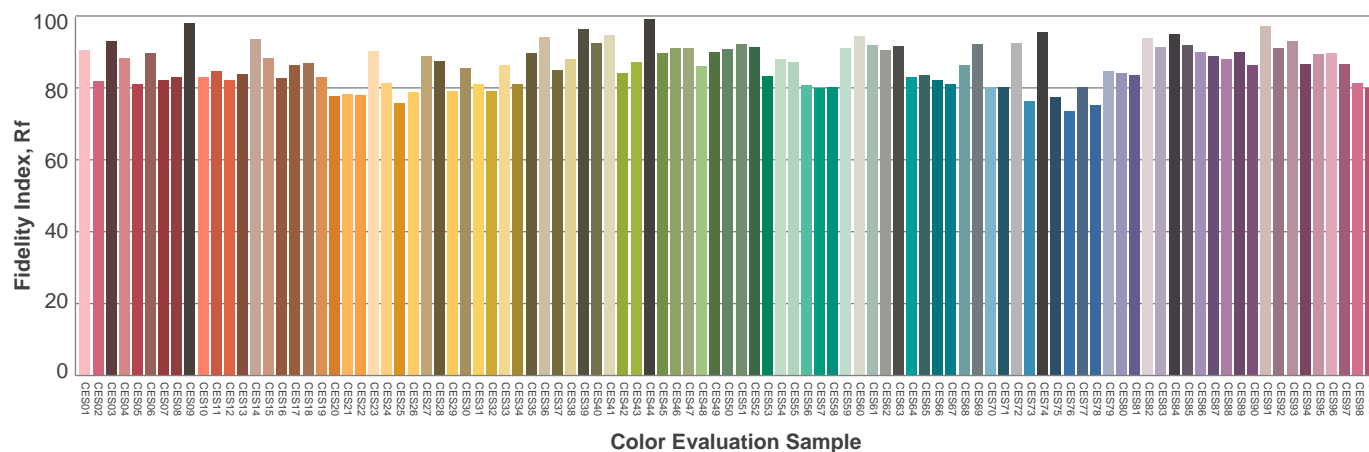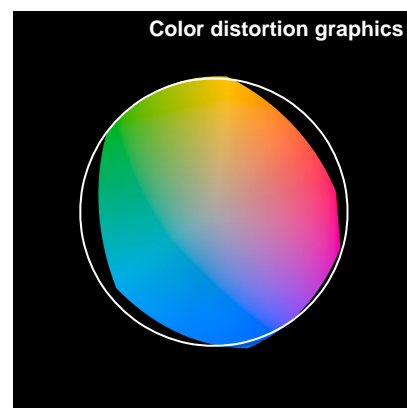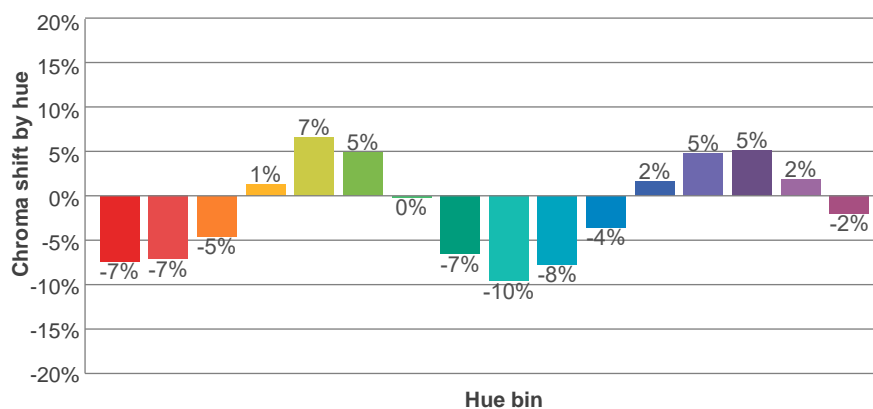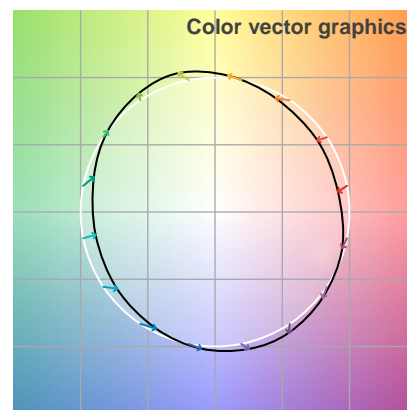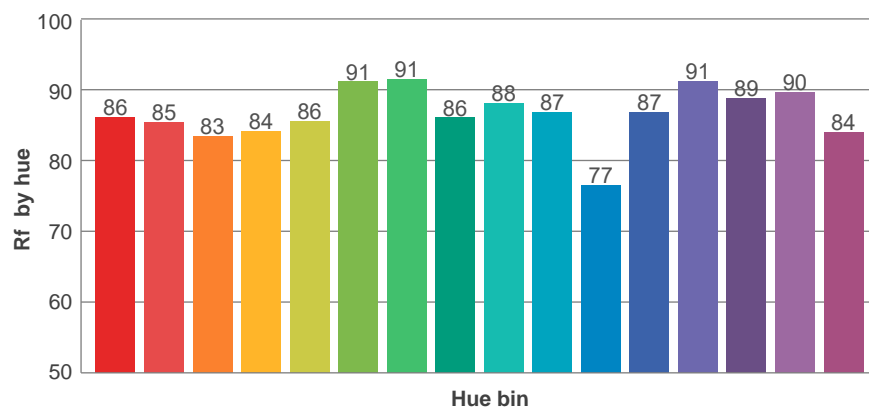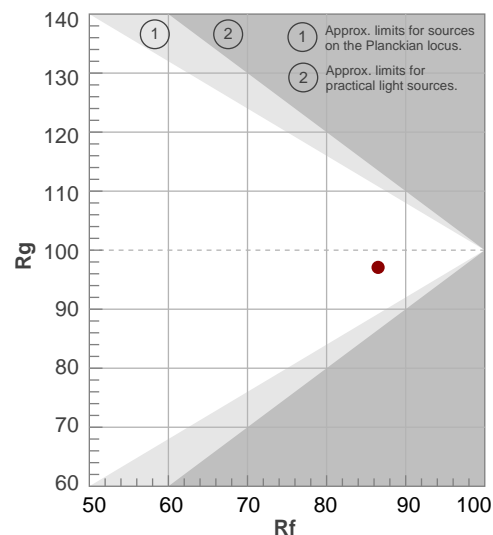

Beam details

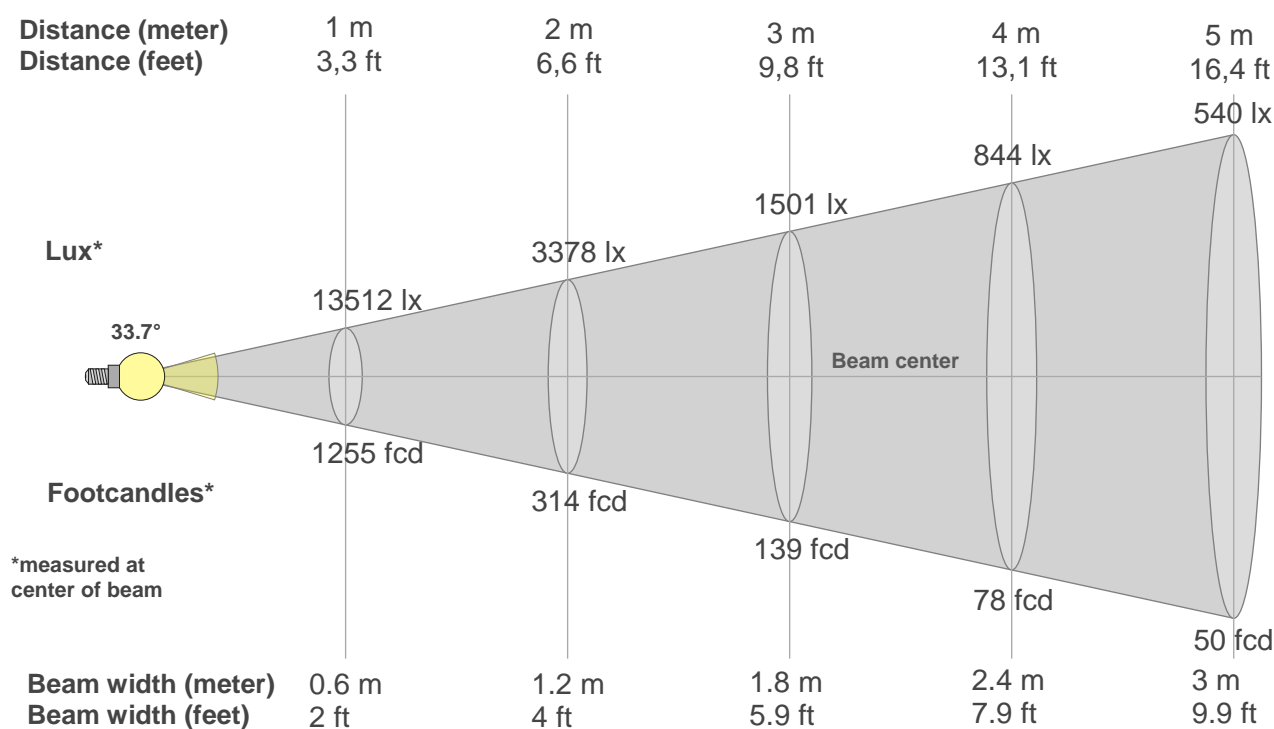

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
13512lx	3378lx	1501lx	844lx	540lx	375lx	276lx	211lx	167lx	135lx	112lx	94lx	80lx	69lx	60lx	53lx	47lx	42lx	37lx	34lx
1255.3fcd	313.8fcd	139.5fcd	78.5fcd	50.2fcd	34.9fcd	25.6fcd	19.6fcd	15.5fcd	12.6fcd	10.4fcd	8.7fcd	7.4fcd	6.4fcd	5.6fcd	4.9fcd	4.3fcd	3.9fcd	3.5fcd	3.1fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
13.5k	13.5k	13.3k	13.0k	12.6k	11.9k	11.0k	9.4k	7.5k	5.8k	3.9k	2.4k	1.3k	0.8k	0.7k	0.7k	0.7k	0.7k	0.7k	0.7k
100%	100%	98%	97%	93%	88%	82%	70%	56%	43%	29%	17%	10%	6%	5%	5%	5%	5%	5%	5%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
13.5k	13.5k	13.3k	13.0k	12.6k	11.9k	11.0k	9.4k	7.5k	5.8k	3.9k	2.4k	1.3k	0.8k	0.7k	0.7k	0.7k	0.7k	0.7k	0.7k
100%	100%	98%	97%	93%	88%	82%	70%	56%	43%	29%	17%	10%	6%	5%	5%	5%	5%	5%	5%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
13.5k	13.5k	13.3k	13.0k	12.6k	11.9k	11.0k	9.4k	7.5k	5.8k	3.9k	2.4k	1.3k	0.8k	0.7k	0.7k	0.7k	0.7k	0.7k	0.7k
100%	100%	98%	97%	93%	88%	82%	70%	56%	43%	29%	17%	10%	6%	5%	5%	5%	5%	5%	5%

Intensities in 270° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
13.5k	13.5k	13.3k	13.0k	12.6k	11.9k	11.0k	9.4k	7.5k	5.8k	3.9k	2.4k	1.3k	0.8k	0.7k	0.7k	0.7k	0.7k	0.7k	0.7k
100%	100%	98%	97%	93%	88%	82%	70%	56%	43%	29%	17%	10%	6%	5%	5%	5%	5%	5%	5%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
33.7°	47.8°	360°	48.2%	40.8%


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

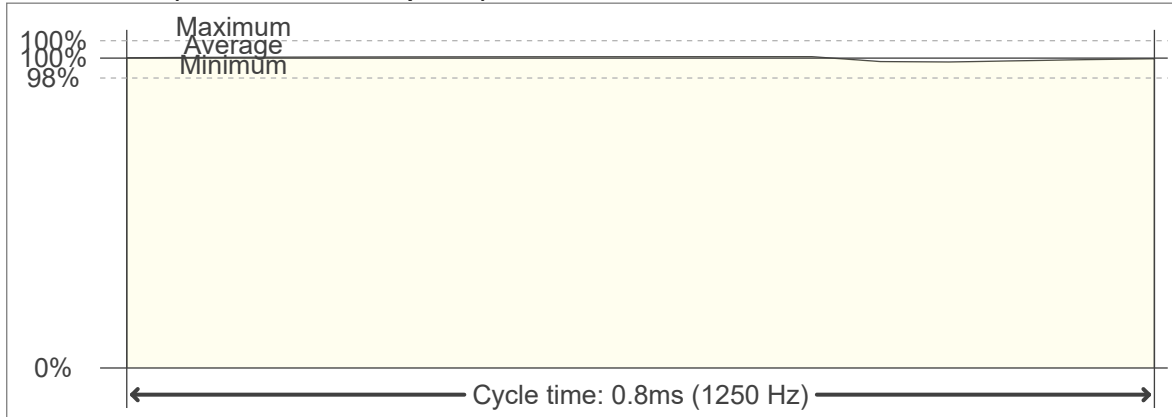

Flicker FFT (frequency scope of flicker curve)

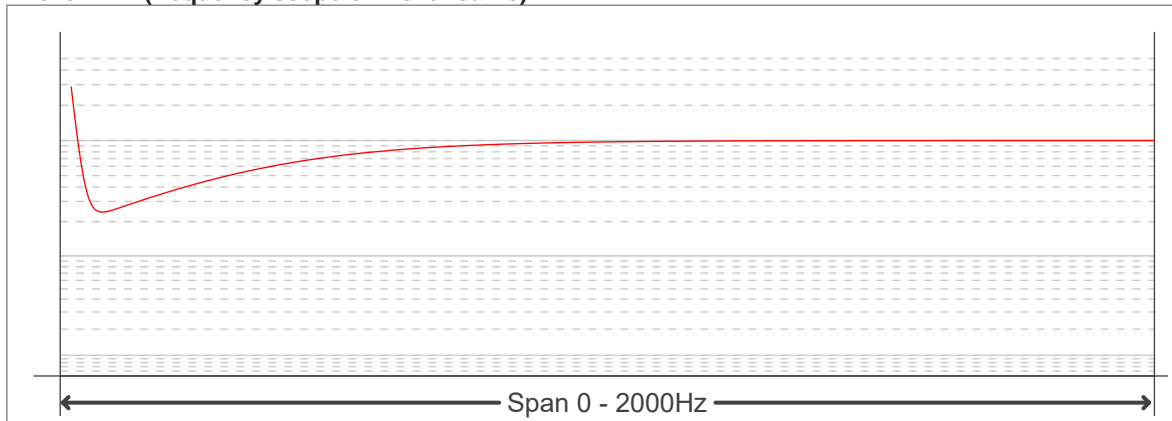

Flicker results:

Flicker frequency:		1250 Hz	
Flicker index:	0	JA8/10 40Hz	0.06 %
Flicker percentage:	0.97 %	JA8/10 90Hz	0.06 %
SVM: (Visual flicker)	0.01	JA8/10 200Hz	0.06 %
PstLM	0	JA8/10 400Hz	0.07 %
Mp	0.03	JA8/10 1000Hz	0.1 %

Flicker conditions:

Sample rate:	20000 samples/second
--------------	----------------------